

Solid State Microwave Generator 1150 W / 2450 MHz

FM - SG1K3W0CGH



General Information



The **FM - SG1K3W0CGH** Microwave Generators from **Fricke und Mallah Microwave Technology GmbH** are compact, light-weight and highly reliable Solid State Microwave Generators which provide continuous wave at frequencies ranging between 2400 MHz and 2500 MHz. This microwave generator features a output of **20..1150 W CW** and the power is easily adjustable in 5-W-steps. Meanwhile, it integrates real-time monitoring and full automatic operation (through an optionally available software) with a user-friendly control panel which is allowing users to do easy set-up and control. In addition to CW operation, pulse operation is possible. The pulses can be set up to 20 kHz in a ratio of 20 % - 100 %.

For local operation (stand-alone), the control panel gives an overview of the most important parameters, such as frequency, forward and reverse power, error management and temperature of the generator. Furthermore, various operating modes can be set, such as random frequency, frequency scan, frequency sweep or automatic adjustment tracking.

For the remote connection, the basic functions of the

generator can be queried via the SCPI nomenclature. This includes information about the generator used (Get) (generator number, thus several generators can be controlled), the current frequency (Set / Get), the current power (Set/Get), the forward power (Get), the reverse power (Get), the RF energy introduced into the process (Get), the temperature of the generator (Get) and error number (Get). Optionally, software for control based on the functions can be ordered.

The **FM - SG1K3W0CGH Microwave Generators** operate perfectly with water cooling. They are the cutting-edge tool for industrial and scientific application.

Key features

- Designed for industry heating, drying and plasma processes
- Frequency band 2400 MHz – 2500 MHz.
- Maximum 1150 W output power.
- 20 W – 1150 W setting range in 5 W steps.
- Flexible signal generator with CW or Pulse.
- Protected against total mismatch (isolator)
- High efficiency water cooling mechanical design.
- Interlock (one or two channel)
- Knob switch to turn on the generator (lockable)
- Local or remote operation
- Measuring of forward and reverse power
- All connectors on the back side

Solid State Microwave Generator 1150 W / 2450 MHz

FM - SG1K3W0CGH



Specification

Electrical Data

Input

Line Input	220 V _{AC} - 260 V _{AC}
Line Frequency	50 Hz / 60 Hz
AC power consumption	3600 W max.

Output

RF maximum output power	1150 W 60.6 dBm
Efficiency	≥ 40 %
Power setting range	20..1150 W adjustable in 5-W-steps
Frequency setting range	2400..2500 MHz adjustable in 0.1 MHz-steps
Pulse frequency	1 – 20 kHz
Duty cycle	20 – 100 %
Pulse rise time	≤ 200 ns
Pulse fall time	≤ 200 ns
Isolator	Yes
MTBF	≥ 100000 h

Control / Monitoring

Control Unit	Rotary encoder on the front panel
Interface	RS232 (SUB9 connector) / USB (Typ B connector) / Ethernet (RJ45 connector)
Protocol	SCPI (Standard Commands for Programmable Instruments)

Ambient Conditions


Use	Indoor use only
Environment temperature	+ 10° to + 45° C
Humidity	< 80%

Cooling


Coupling	2 bulkhead fitting G1/4" for easy connecting to customer systems
Water flow	≥ 6 l/min
Cooling water temperature	+18° C to +27° C (non condensing)
Cooling water pressure	3 - 5 bar

Mechanical Data


Rack Dimensions	19" x 5HE
Rack Total WxHxD (with connector)	482 x 221 x 586 mm
Total Weight	approx. 18 kg

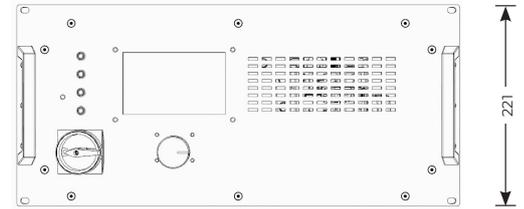


Front side

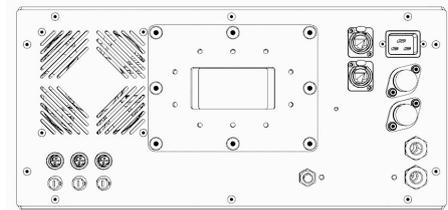

Back side

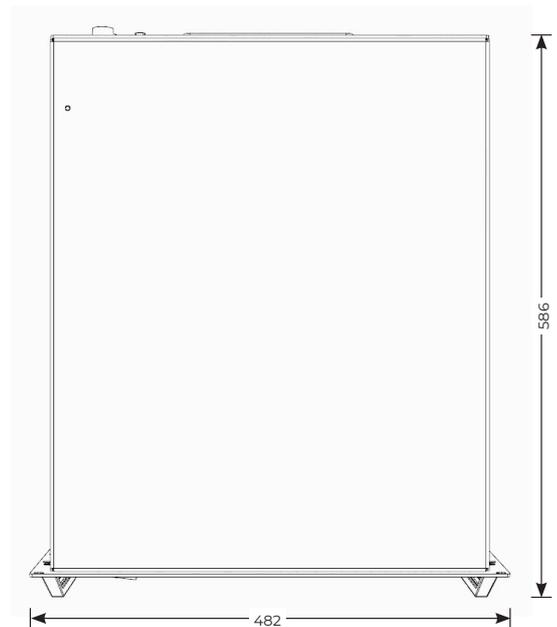

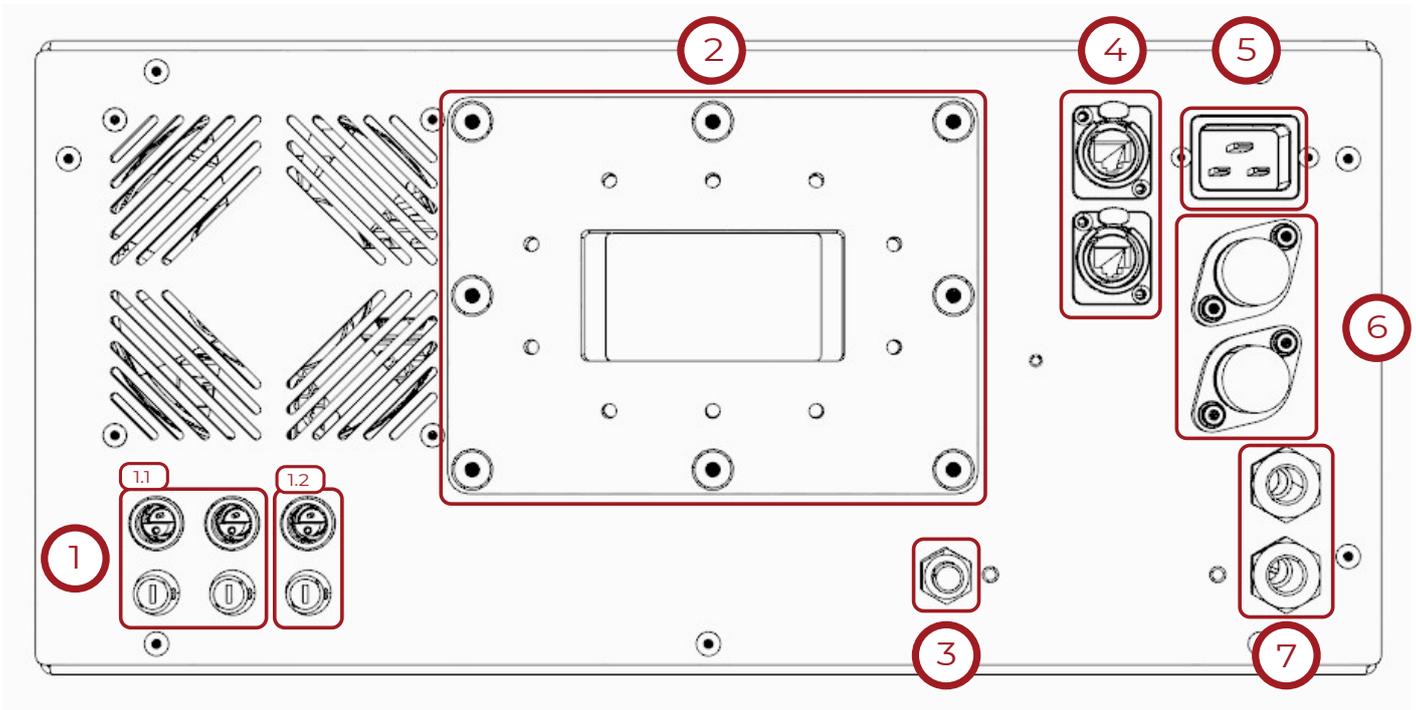

Connectors

- 1 Additional plugs:
 - 1.1 LEMO Typ ERA.2S.303.CLL for safety circuits interlock
 - 1.2 LEMO Typ ERA.2S.304.CLL for start safety circuit
- 2 R26 Waveguide
- 3 M10 grounding bolt
- 4 Communication interface USB type B socket, RS232 (D-SUB9) or Ethernet (RJ45 socket). Interface is selected when ordering.
- 5 AC feed with C19 socket
- 6 Fuse holder for AC feed
- 7 Water in and water out G1/4" inner thread

Scope of delivery

The customer must specify the desired communication centre for remote operation when ordering. It must also be stated whether an additional safety circuit interlock is required. The standard is 1 channel safety circuit interlock (compare connector discription 4).

- Solid State Microwave Generator FM - SG1K3W0CGH
- AC power cable with 2m length (C20 plug to CEE7/4 plug (Schuko plug))

Optional parts for delivery:

- Waveguide components
- Control software for the generator
- Plugs for the LEMO connectors with customize cable length to wire end ferrule
- Plug for start safty circuit