


KEY FEATURES | TECHNICAL DETAILS

- Designed for industrial heating and plasma process applications
- 500 Watt power capability
- Output load VSWR Protection
- High efficiency water cooling mechanical design in a compact and robust housing

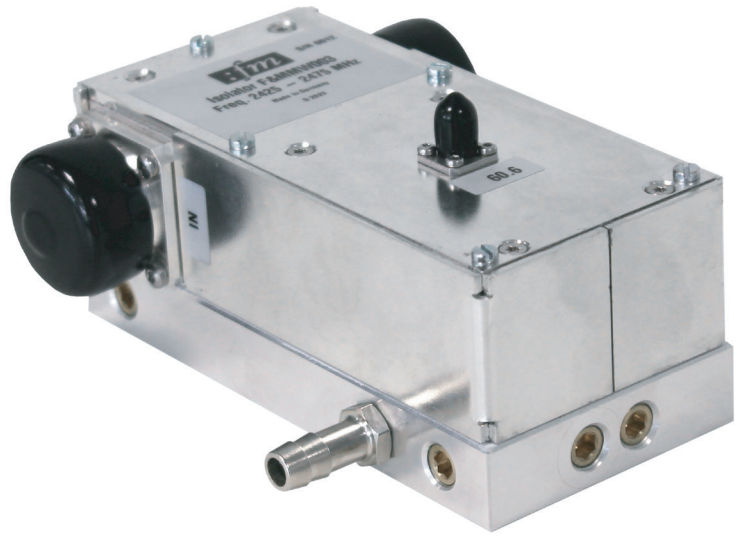

SPECIFICATION

Electrical and Technical Data

Frequency band	2400 - 2500 MHz
RF maximum output power	500 W
	57 dBm
RF power into the load	500 W
	57 dBm
Isolation (over Frequency band)	> 20.0 dB
Return loss (over Frequency band)	> 19.0 dB
Insertion loss (over Frequency band)	< 0.2 dB
Monitor coupling (SMA female)	60dB ± 1 dB
RF Connectors	In/Out: 7/16" female, Monitor: SMA female
Water Connector	thread sockets G 1/8"-9

Environmental

Environment temperature	+ 10° to + 55° C
Cooling water temperature	+ 10° to + 30° C
Water flow	≥ 8 l/min.
Maximum case temperature	+50 °C

Mechanical Data

Dimensions incl. all connectors (WxHxD)	1355x 63.45 x 113 mm
Weight	1.9 kg