




Clean PFX Screens

Solving Your Toughest Screening Problems




Clean PFX™ screens provide more effective use of screening surface area and greater production. Independent wires vibrate at high frequencies acting as a catalyst for quicker stratification of materials. Clean PFX solves the toughest and most severe screening problems while maintaining materials in specification.

- Engineered to decrease your cost per ton
- Increased screen life
- Newly innovative polyurethane strips
- Reduces blinding and pegging for fast effective screening
- Extensive range of openings
- No modification required of crowned deck

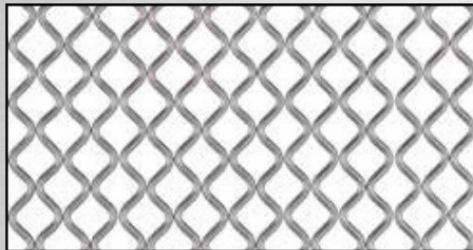


The “M” series is ideal for exact sizing of passing material while increasing screening efficiency. All wires are independent and form square openings. The “M” series produces a high quality, consistent product.

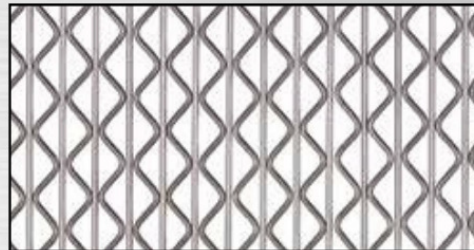

The “H” series is designed for large or very fine sizes and is reinforced for heavier loading and higher energy impact materials. The alternating straight and crimped wires form triangular openings designed to absorb impact.



The “L” series delivers maximum throughput and is ideal for the removal of fines. Overall blinding is significantly reduced when screening wet adhesive materials. The “L” series can also be used to produce high volumes of dry product in certain applications.

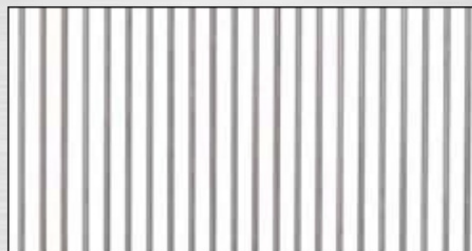

The Harp series is designed in a standard piano wire screen style with maximum open area. It is most efficient in the dry screening of sand, gravel, loam, topsoil, mulch, compost, golf sand and more.



The Clean Slot series is designed with alternating straight and crimped wires in a slotted screen with an elongated opening. The crimped wires absorb energy and vibrate rapidly providing a ‘self-cleaning’ action. This weave works well in high moisture applications.