


## EML-6014


## Luminaire



## Details




## Schematic



Type	Exit sign luminaire
Mounting	Sidewall
Light source	50.000h operational time, 6000K color temperature
Warranty	2-years warranty
Dimensions	337mm x 170mm x 62mm
Housing color and material	White plastic
Cable connection	Max. 2.5mm <sup>2</sup> cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < Ta < 45 °C

The EML-6014 is a double-sided, ceiling-mounted LED exit sign with strong plastic housing with IP65 protection. Suitable for dry and wet locations (rest room, basement, garage) and for outdoor use as well.

The following pictograms can be selected:

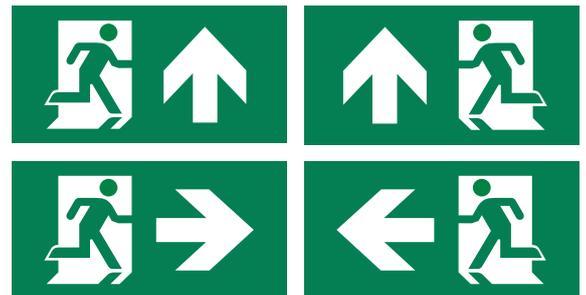

Product name	System type	Main supply	Input current	Battery type/time	Product code
EML-6014 Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300255
EML-6014 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	15mA		300143
EML-6014 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	15mA	-	300019
EML-6014 Slave/Con/CB/24V	Conventional central battery	DC 24-32V	80mA	-	300334
EML-6014 Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	300256
EML-6014 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
EML-6014 Slave/CB 24V	Addressable central battery	DC 24-32V	80mA	-	300274
EML-6014 Slave/CB	Addressable central battery	AC 120-240V	15mA	-	300180
EML-6014 Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	15mA	-	-