


EML-414


Luminaire



Details




Schematic

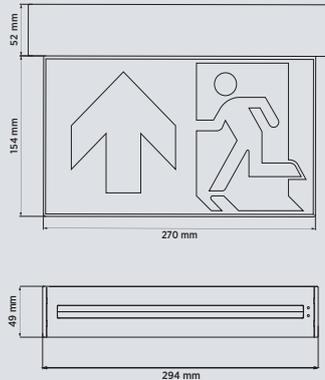

| | |
|--|---|
| Type | Exit sign luminaire |
| Mounting | Ceiling, sidewall, flag, suspended |
| Light source | 50.000h operational time, 6000K color temperature |
| Warranty | 5-years repair warranty |
| Dimensions | 294mm x 206mm x 49mm |
| Housing color and material | White plastic |
| Cable connection | Max. 2.5mm ² cross-section solid or sleeved twisted wire |
| Operating mode: | Non-maintained / Maintained |
| Constant nominal ambient temperature range | 0 °C < T _a < 45 °C |

High-quality double sided LED exit sign. It was designed mainly for buildings with high aesthetic requirements (hotels, business centres). The EML-414 luminaire suitable for types of mounting: to the ceiling, parallel to the sidewall and perpendicularly to the sidewall.

The following pictograms can be selected:

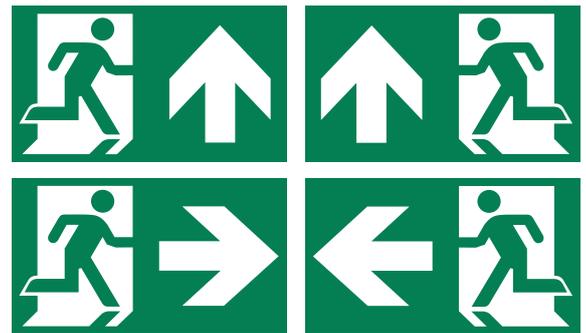

| Product name | System type | Main supply | Input current | Battery type/time | Product code |
|---------------------------|------------------------------|----------------|---------------|-------------------|--------------|
| EML-414 Slave/Con/MB | Conventional main battery | AC 120-240V | 32mA | NIMH 600mA 1-3 h | 300218 |
| EML-414 Slave/Con/CB ACAC | Conventional central battery | AC 120-240V | 15mA | - | - |
| EML-414 Slave/Con/CB ACDC | Conventional central battery | AC/DC 120-240V | 15mA | - | 300393 |
| EML-414 Slave/Con/CB/24V | EML-24V CON CB | DC 24-32V | 80mA | - | - |
| EML-414 Slave/MB | EML-100 - 400 | AC 120-240V | 32mA | NIMH 600mA 1-3 h | 300223 |
| EML-414 Slave/RF/MB | EML-100 RF | AC 120-240V | 32mA | NIMH 600mA 1-3 h | 300544 |
| EML-414 Slave/CB 24V | EML-24V CB | DC 24-32V | 80mA | - | 300301 |
| EML-414 Slave/CB | EML-600 | AC 120-240V | 15mA | - | 300133 |
| EML-414 Slave/CB AC-DC | CBS-230 AC/DC | AC/DC 120-240V | 15mA | - | 300558 |