


EML-415


Luminaire



Details




Schematic

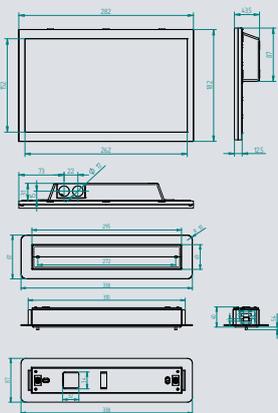

Type	Exit sign luminaire
Mounting	Sidewall, sidewall recessed, suspended from ceiling, recessed into ceiling and suspended
Light source	50.000h operational time, 6000K color temperature
Warranty	5-years warranty
Dimensions	337mm x 170mm x 62mm
Housing color and material	White plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

The EML-415 is an elegant exit sign with IP42 protection and a 30m viewing distance. One-sided and double-sided design with sidewall-mounted, ceiling-recessed suspended, and ceiling-suspended mounting variations. Pictogram's direction must be marked during the order.

The following pictograms can be selected:

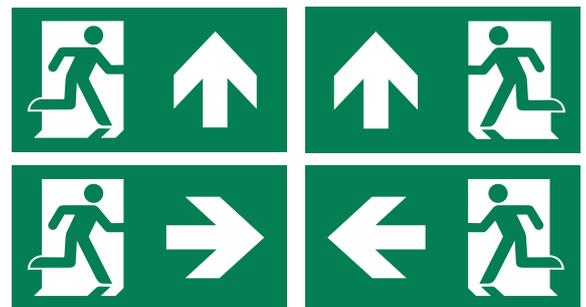

Product name	System type	Main supply	Input current	Battery type/ time	Product code
EML-415 Slave/Con/CB ACAC	Suspended, one sided	Conventional central battery	AC 120-240V	15mA	-
EML-415 Slave/Con/CB ACAC	Suspended, two sided	Conventional central battery	AC 120-240V	15mA	-
EML-415 Slave/Con/CB ACDC	Suspended, one sided	Conventional central battery	AC/DC 120-240V	15mA	-
EML-415 Slave/Con/CB ACDC	Suspended, two sided	Conventional central battery	AC/DC 120-240V	15mA	-
EML-415 Slave/Con/CB 24V	Suspended, one sided	Conventional central battery	DC 24-32V	80mA	-
EML-415 Slave/Con/CB 24V	Suspended, two sided	Conventional central battery	DC 24-32V	80mA	-
EML-415 Slave/CB 24V	Suspended, one sided	Addressable central battery	DC 24-32V	80mA	311220
EML-415 Slave/CB 24V	Suspended, two sided	Addressable central battery	DC 24-32V	80mA	311330
EML-415 Slave/CB	Suspended, one sided	Addressable central battery	AC 120-240V	15mA	312220
EML-415 Slave/CB	Suspended, two sided	Addressable central battery	AC 120-240V	15mA	312330
EML-415 Slave/CB AC-DC	Suspended, one sided	Addressable central battery	AC/DC 120-240V	15mA	313220
EML-415 Slave/CB AC-DC	Suspended, two sided	Addressable central battery	AC/DC 120-240V	15mA	313330

Product name	System type	Main supply	Input current	Battery type/ time	Product code
EML-415 Slave/Con/CB ACAC	Recessed-suspended, one sided	Conventional central battery	AC 120-240V	15mA	-
EML-415 Slave/Con/CB ACAC	Recessed-suspended, two sided	Conventional central battery	AC 120-240V	15mA	-
EML-415 Slave/Con/CB ACDC	Recessed-suspended, one sided	Conventional central battery	AC/DC 120-240V	15mA	-
EML-415 Slave/Con/CB ACDC	Recessed-suspended, two sided	Conventional central battery	AC/DC 120-240V	15mA	-
EML-415 Slave/Con/CB 24V	Recessed-suspended, one sided	Conventional central battery	DC 24-32V	80mA	-
EML-415 Slave/Con/CB 24V	Recessed-suspended, two sided	Conventional central battery	DC 24-32V	80mA	-
EML-415 Slave/CB 24V	Recessed-suspended, one sided	Addressable central battery	DC 24-32V	80mA	311640
EML-415 Slave/CB 24V	Recessed-suspended, two sided	Addressable central battery	DC 24-32V	80mA	311750
EML-415 Slave/CB	Recessed-suspended, one sided	Addressable central battery	AC 120-240V	15mA	312640
EML-415 Slave/CB	Recessed-suspended, two sided	Addressable central battery	AC 120-240V	15mA	312750
EML-415 Slave/CB AC-DC	Recessed-suspended, one sided	Addressable central battery	AC/DC 120-240V	15mA	313640
EML-415 Slave/CB AC-DC	Recessed-suspended, two sided	Addressable central battery	AC/DC 120-240V	15mA	313750

Product name	System type	Main supply	Input current	Battery type/ time	Product code
EML-415 Slave/Con/CB ACAC	Wall mounted	Conventional central battery	AC 120-240V	15mA	-
EML-415 Slave/Con/CB ACDC	Wall mounted	Conventional central battery	AC/DC 120-240V	15mA	-
EML-415 Slave/Con/CB 24V	Wall mounted	Conventional central battery	DC 24-32V	80mA	-
EML-415 Slave/CB 24V	Wall mounted	Addressable central battery	DC 24-32V	80mA	311110
EML-415 Slave/CB	Wall mounted	Addressable central battery	AC 120-240V	15mA	312110
EML-415 Slave/CB AC-DC	Wall mounted	Addressable central battery	AC/DC 120-240V	15mA	313110