


EML-817 PLEXIGLASS


Luminaire



Details




Schematic

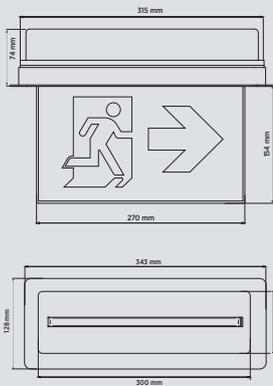

Type	Exit sign luminaire
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Warranty	5-years warranty
Dimensions	343mm x 128mm x 228mm
Housing color and material	White plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < Ta < 45 °C

The EML-817 + plexiglass is a double-sided, ceiling-recessed LED exit sign with strong plastic housing with IP54 protection. Due to its design, it is suitable for shopping centres, office buildings, staircases, and other public buildings.

The following pictograms can be selected:

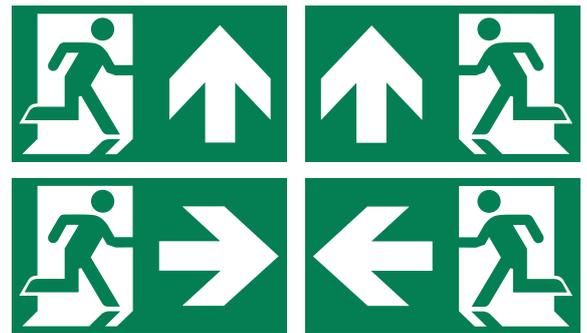

Product name	System type	Main supply	Input current	Battery type/time	Product code
EML-817+plexi Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
EML-817+plexi Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	15mA	-	-
EML-817+plexi Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	15mA	-	-
EML-817+plexi Slave/Con/CB/24V	Conventional central battery	DC 24-32V	80mA	-	-
EML-817+plexi Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
EML-817+plexi Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 600mA 1-3 h	-
EML-817+plexi Slave/CB 24V	Addressable central battery	DC 24-32V	80mA	-	-
EML-817+plexi Slave/CB	Addressable central battery	AC 120-240V	15mA	-	300425
EML-817 + plexi Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	15mA	-	-