


EML-4014F


Emergency Light



Details




Schematic

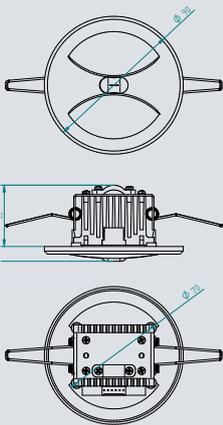

Type	LED emergency light
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Luminous flux	388 lm
Warranty	5-years warranty
Dimensions	90mm x 69mm x 46mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

Aesthetic LED safety light for recessing into the ceiling. It is available with lens for corridors. It has a great effective range, its practical design makes it easy to install.

Mounting height (m)		2,5	3	4	6	8	10	15
Escape route min 1 lux	Transverse mounting	4.7	5	6	7.6	7.9	-	-
	Axial mounting	2	2.3	2.6	2.7	2.4	-	-
	Transverse mounting	10.9	12.5	15.1	19.5	23.2	-	-
	Axial mounting	4.9	5.4	6.4	8.3	9.3	-	-



Product name	System type	Main supply	Input current	Battery type/time	Product code
EML-4014F Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300352
EML-4014F Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300409
EML-4014F Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	29mA	-	-
EML-4014F Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	29mA	-	300391
EML-4014F Slave/Con/CB/24V	Conventional central battery	DC 24-32V	230mA	-	-
EML-4014F Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300201
EML-4014F Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300152
EML-4014F Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 h	-
EML-4014F Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	-
EML-4014F Slave/CB 24V	Addressable central battery	DC 24-32V	230mA	-	300232
EML-4014F Slave/CB	Addressable central battery	AC 120-240V	29mA	-	300139
EML-4014F Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	29mA	-	300555