


# EML-4014R


## Emergency Light



## Details




## Schematic

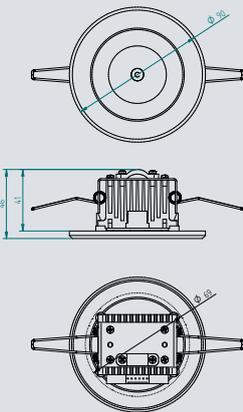

Type	LED emergency light
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Luminous flux	377 lm
Warranty	5-years warranty
Dimensions	90mm x 69mm x 46mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm <sup>2</sup> cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained
Constant nominal ambient temperature range	0 °C < T <sub>a</sub> < 45 °C

Aesthetic LED safety light for recessing into the ceiling. It is available with round LED lens. It has a great effective range, its practical design makes it easy to install.

Mounting height (m)	2,5	3	4	6	8	10	15
Transverse mounting	5.8	6.1	7	8.3	10.2	10.6	12.3
Escape route min 1 lux	2.3	2.6	3	3.8	4	4.4	3.9
Axial mounting	10.3	11.3	12.3	10.7	11.1	11.1	11.6
	4.4	4.6	3.6	4.2	4.2	4.2	3.7

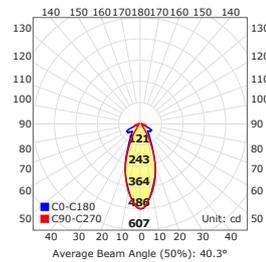

Product name	System type	Main supply	Input current	Battery type/time	Product code
EML-4014R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300187
EML-4014R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300290
EML-4014R Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	29mA	-	-
EML-4014R Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	29mA	-	-
EML-4014R Slave/Con/CB/24V	Conventional central battery	DC 24-32V	230mA	-	-
EML-4014R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300205
EML-4014R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300096
EML-4014R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 h	-
EML-4014R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300543
EML-4014R Slave/CB 24V	Addressable central battery	DC 24-32V	230mA	-	300316
EML-4014R Slave/CB	Addressable central battery	AC 120-240V	29mA	-	300284
EML-4014R Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	29mA	-	-