


EML-613


Emergency Light



Details




Schematic



Type	LED emergency light
Mounting	Sidewall, ceiling
Light source	50.000h operational time, 6000K color temperature
Luminous flux	294 lm
Warranty	5-years warranty
Dimensions	315x102x74mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained
Constant nominal ambient temperature range	0 °C<T _a <45 °C

LED safety light with IP54 protection for ceilings or sidewalls. Maintained function with the built-in 1W LED.

Mounting height (m)	2,5	3	4	6	8	10	15
Transverse mounting	7,43	8,38	9,71	10,58	10,68	8,29	0
	3,27	3,55	3,73	3,8	2,07	0	0
Escape route min 1 lux	9,37	10,09	11,19	11,56	10,27	6,18	0
	4,14	4,52	3,78	2,99	1,65	0	0

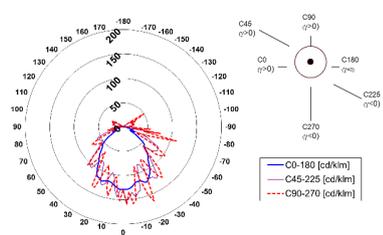

Product name	System type	Main supply	Input current	Battery type/time	Product code
EML-613 Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 600mA 1 h	300389
EML-613 Slave/Con/MB	Conventional main battery	AC 120-240V	32mA	NIMH 1600mA 3 h	300098
EML-613 Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 600mA 1 h	300419
EML-613 Slave/MB	Addressable main battery	AC 120-240V	32mA	NIMH 1600mA 3 h	300225
EML-613 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 600mA 1 h	-
EML-613 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 2400mA 3 h	-
EML-613 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	32mA	NIMH 2400mA 3 h	.