



CL-4014R


Emergency Light

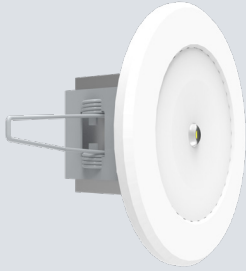

Details




Schematic

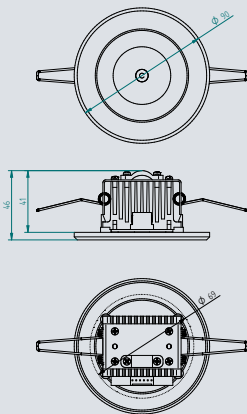

Type	LED emergency light
Mounting	Ceiling recessed
Light source	50.000h operational time, 6000K color temperature
Luminous flux	24V: 365 lm ACAC/ACDC: 329 lm CON/MB: 318 lm
Warranty	5-years warranty
Dimensions	90mm x 69mm x 46mm
Housing color and material	White, black plastic
Cable connection	Max. 2.5mm ² cross-section solid or sleeved twisted wire
Operating mode:	Non-maintained / Maintained
Constant nominal ambient temperature range	0 °C < T _a < 45 °C

Aesthetic LED safety light for recessing into the ceiling. It is available with round LED lens. It has a great effective range, its practical design makes it easy to install.

Mounting height (m)	2,5	3	4	6	8	10	15
Transverse mounting	10,9	12,5	15,1	19,5	23,2	-	-
Escape route min 1 lux	4,9	5,4	6,4	8,3	9,3	-	-
Axial mounting	4,7	5	6	7,6	7,9	-	-

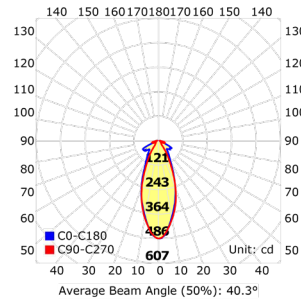

Product name	System type	Main supply	Input current	Battery type/time	Product code
CL-4014R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300169
CL-4014R Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300170
CL-4014R Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	29mA	-	300188
CL-4014R Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	29mA	-	300176
CL-4014R Slave/Con/CB/24V	Conventional central battery	DC 24-32V	230mA	-	300313
CL-4014R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300166
CL-4014R Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300163
CL-4014R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 h	-
CL-4014R Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	-
CL-4014R Slave/CB 24V	Addressable central battery	DC 24-32V	230mA	-	300282
CL-4014R Slave/CB	Addressable central battery	AC 120-240V	29mA	-	300172
CL-4014R Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	29mA	-	-