

TECHNICAL DATA SHEET


C305HC



SPECIFICATIONS

Part number	C305HC
BCI Group	902
Volt	6V
Type	Wet acid, Deep Cycle
Capacity @20HR	330AH
Reserve capacity	760 min. @25 amp.
Life cycles	700 cycles at 80% DOD
Terminal type	Dual, auto post + stud 5/16"
Terminal Torque	11-14.7 N*m (111-150 KGf*cm)
Container material	Polypropylene
Integrated Hydrometer	Yes



DRAWING

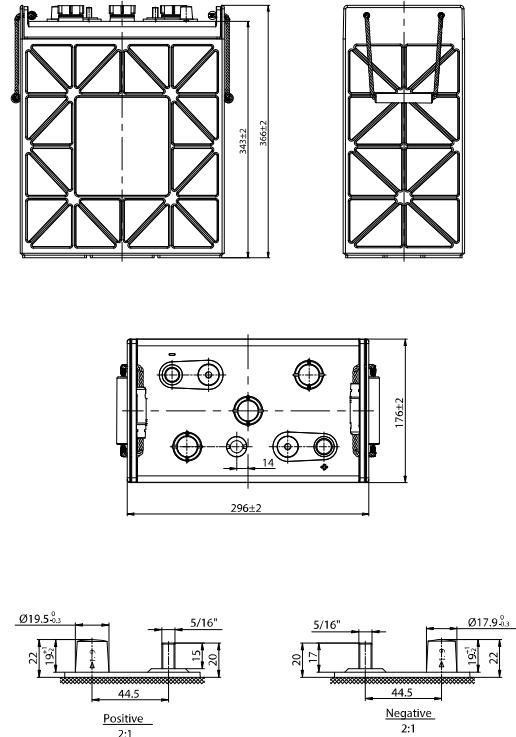


DIMENSIONS

Length	11 5/8" (296 mm)
Width	6 15/16" (176 mm)
Case Height	13 1/2" (343 mm)
Overall Height	14 7/16" (366 mm)
Weight	92.6 lbs (42 Kg)


INTEGRATED HYDROMETER

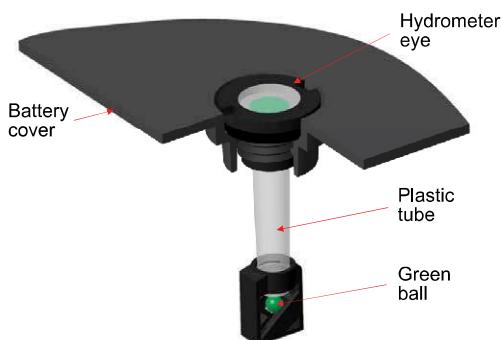


Charging Characteristics (25°C, 77°F)

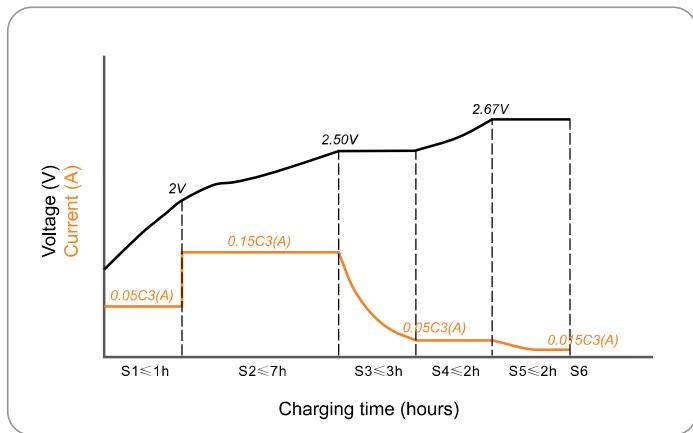


Cycle life in relation to depth of discharge

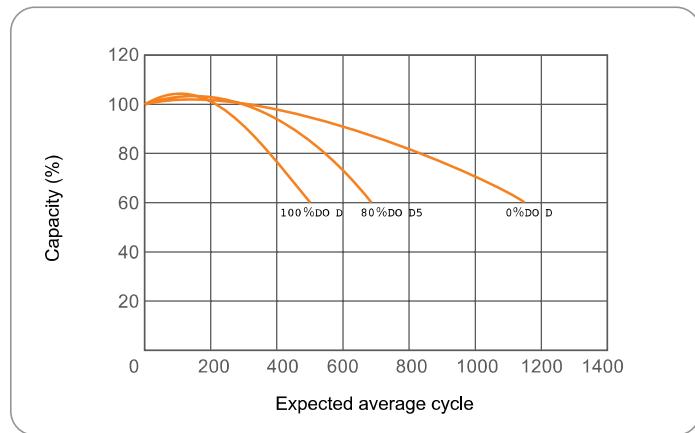

Relationship of OCV and SOC (25°C, 77°F)

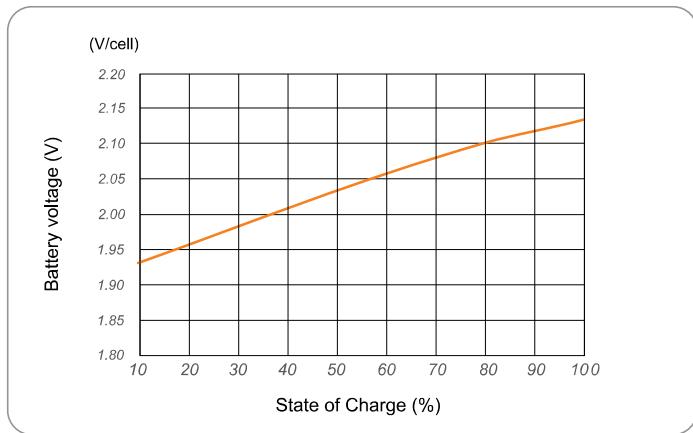

Temperature effects on capacity

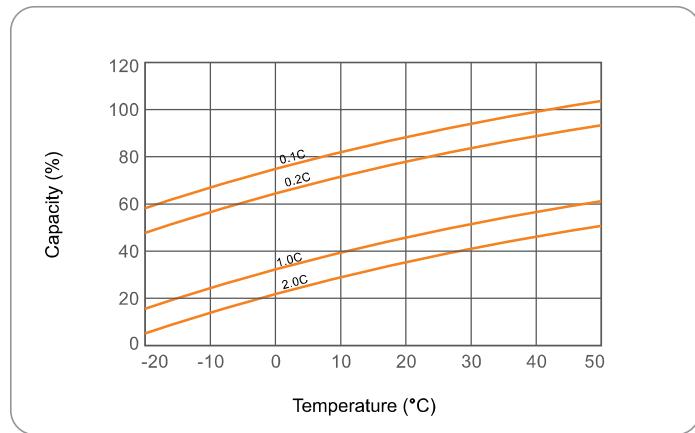

CHARGE METHOD

Initial Charge:

- 0.1C₂₀(A) charging 15h
- 0.05C₂₀(A) charging 10h

The temperature of the battery should be below 50°C during charging.

Float Voltage:

- 2.25V/cell, 6.75V

Equalizing Charge:

- 8.10V

Supplement Charge:

- Charging at a constant voltage of 7.35~7.5V/cell and a limited current 0.25C₂₀(A) until the electrolyte density up to 1.280g/cm³ (30°C) and the current not change for 3 hours.
- Charge with constant current 0.1C₂₀(A) until the voltage between 7.8~8.4V/cell, and voltage maintains for 3 hours and not change.

Two method optional.

RECYCLING

- 99% recyclable