

Fujipoly Data Sheet

SARCON GR14B series

Gap Filler Type

FEATURES


Highly Conformable, Non-Flammable, Isolation and High Heat Conducting Gel materials.

- Gap filler materials are supplied in a fully cured state and remain pliable, easy conforming to minute surface irregularities.
- The basic Gap Filler Pad series can be further enhanced for special handling and die-cutting requirements.
- This product has a lower specific gravity and less oil bleeding than our conventional products.

CONSTRUCTIONS

Series	Characteristics	Constructions
SARCON GR14B-00	Silicone compound with double sticky surfaces and Thermal Conductivity of GR14B material is 1.4W/m·K by using Hot Disk.	 Plain Type
SARCON GR14B-0H	Silicone compound as above GR14B-00 plus additional hardening of the top surface to facilitate handling and installation during complex assemblies.	 Hardened Surface
SARCON GR14B-F0	Silicone compound with Nylon mesh reinforcement stiffener to prevent stretching.	 Plain Type Nylon Mesh
SARCON GR14B-FH	Silicone compound as above GR14B-F0 plus additional hardening of the top surface to facilitate handling and installation during complex assemblies.	 Hardened Surface Nylon Mesh

RECOMMENDED APPLICATION

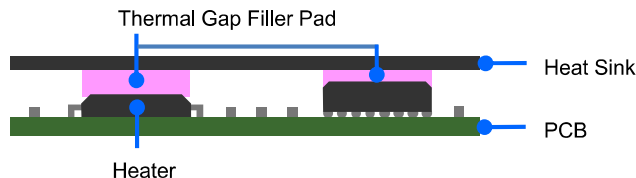

In areas where space between surface is uneven or varies and where surface textures are a concern regarding efficient thermal transfer, the supply consistency of Gap Filler Pad is excellent for filling air gaps and uneven surfaces.

THERMAL RESISTANCE

GR14B-00

Unit : K-cm²/W (K-in²/W)

Compression Force	0.5mmT	1.0mmT	1.5mmT	2.0mmT	2.5mmT	3.0mmT	4.0mmT	5.0mmT
100kPa /14.5psi	3.9 (0.60)	5.8 (0.90)	7.3 (1.13)	10.0 (1.55)	11.9 (1.84)	12.4 (1.92)	17.1 (2.65)	18.1 (2.81)
300kPa /43.5psi	3.2 (0.50)	4.8 (0.74)	6.1 (0.95)	7.8 (1.21)	9.2 (1.43)	10.1 (1.57)	12.3 (1.91)	13.6 (2.11)
500kPa /72.5psi	2.8 (0.43)	4.2 (0.65)	5.3 (0.82)	6.7 (1.04)	7.8 (1.21)	8.4 (1.30)	10.3 (1.60)	11.5 (1.78)

GR14B-0H

Compression Force	0.5mmT	1.0mmT	1.5mmT	2.0mmT	2.5mmT	3.0mmT	4.0mmT	5.0mmT
100kPa /14.5psi	4.1 (0.64)	6.4 (0.99)	8.7 (1.35)	10.9 (1.69)	13.1 (2.03)	13.5 (2.09)	17.7 (2.74)	21.3 (3.30)
300kPa /43.5psi	4.0 (0.62)	5.7 (0.88)	7.1 (1.10)	8.7 (1.35)	10.1 (1.57)	10.8 (1.67)	13.7 (2.12)	15.7 (2.43)
500kPa /72.5psi	3.6 (0.56)	5.0 (0.78)	6.2 (1.96)	7.4 (1.15)	8.6 (1.33)	9.0 (1.40)	11.2 (1.74)	12.9 (2.00)

GR14B-F0

/ GR14B-FH

Compression Force	0.5mmT	1.0mmT	1.5mmT	2.0mmT	0.5mmT	1.0mmT	1.5mmT	2.0mmT
100kPa /14.5psi	4.6 (0.71)	7.4 (1.15)	10.2 (1.58)	12.4 (1.92)	4.6 (0.71)	7.8 (1.21)	10.0 (1.55)	12.2 (1.89)
300kPa /43.5psi	4.3 (0.67)	6.7 (1.04)	8.8 (1.36)	10.3 (1.60)	4.4 (0.68)	7.0 (1.09)	8.7 (1.35)	10.3 (1.60)
500kPa /72.5psi	4.0 (0.62)	6.1 (0.95)	7.8 (1.21)	9.1 (1.41)	4.1 (0.64)	6.4 (0.99)	7.9 (1.22)	9.2 (1.43)

Test method: Fujipoly Test method, FTM-P3050 by TIM Tester 1300 which is ASTM D5470 equivalent

- Specimen Area : DIA.33.0mm (1.30in)

TYPICAL PROPERTIES

Properties		unit		GR14B-00		Test method	Specimen
Physical Properties	Color	-		Pink		Visual	-
	Specific Gravity	-		1.8		ASTM D792	A
	Hardness	Shore OO		30		ASTM D2240	B
	Highest Value	ASKER-C		10		JIS K7312	
Electrical Properties	Volume Resistivity	Ohm-m		2.4x10 ¹¹		ASTM D257	C
	Breakdown Voltage	kV/mm (volts/mil)		17 (432)		ASTM D149	C
	Dielectric Strength	kV/mm (volts/mil)		10 (254)		ASTM D149	C
	Dielectric Constant	-	50Hz	5.0		ASTM D150	A
			1kHz	4.4			
			1MHz	4.2			
	Dissipation Factor	-	50Hz	0.095		ASTM D150	A
			1kHz	0.042			
			1MHz	0.004			
Thermal Properties	Thermal Conductivity	W/m·K		1.4 by Hot Disk		ISO 22007-2	D
	Useful Temperature	°C (°F)		-40 to +150 (-40 to +302)		-	-
	Low molecular Siloxane	wt%		D ₃ to D ₁₀	0.0033	Gas Chromatography	-
	Flame Retardant	-		D ₁₁ to D ₂₀	0.0778		
				V-0		UL 94	-

- Specimen A : 2mmT • Specimen B : 100mmW x 50mmL x 12mmT (3mmT x 4pcs) • Specimen C : 120mmW x 120mmL x 1mmT
- Specimen D : 50mmW x 50mmL x 9mmT (3mmT x 3pcs)

COMPRESSION FORCE

GR14B-00

Unit : N/6.4cm² (psi)

Compression Ratio	0.5mmT	1.0mmT	1.5mmT	2.0mmT	2.5mmT	3.0mmT	4.0mmT	5.0mmT
10%	109 (24.7)	130 (29.5)	116 (26.3)	79 (17.9)	57 (12.9)	43 (9.7)	32 (7.3)	24 (5.4)
20%	284 (64.3)	277 (62.8)	192 (43.5)	117 (26.5)	83 (18.8)	70 (15.9)	54 (12.2)	42 (9.5)
30%	392 (88.8)	351 (79.5)	240 (54.4)	180 (40.8)	128 (29.0)	109 (24.7)	87 (19.7)	71 (16.1)
40%	634 (143.6)	509 (115.3)	355 (80.4)	281 (63.7)	201 (45.5)	179 (40.6)	142 (32.2)	117 (26.5)
50%	752 (170.4)	660 (149.5)	523 (118.5)	442 (100.1)	317 (71.8)	297 (67.3)	216 (48.9)	182 (41.2)
Sustain 50%	335 (75.9)	317 (71.8)	232 (52.6)	202 (45.8)	135 (30.6)	126 (28.5)	91 (20.6)	81 (18.4)

GR14B-0H

Compression Rate	0.5mmT	1.0mmT	1.5mmT	2.0mmT	2.5mmT	3.0mmT	4.0mmT	5.0mmT
10%	106 (24.0)	145 (32.9)	114 (25.8)	98 (22.2)	67 (15.2)	51 (11.6)	38 (8.6)	25 (5.7)
20%	285 (64.6)	320 (72.5)	176 (39.9)	145 (32.9)	103 (23.3)	85 (19.3)	64 (14.5)	47 (10.6)
30%	524 (118.7)	428 (97.0)	258 (58.5)	222 (50.3)	165 (37.4)	135 (30.6)	105 (23.8)	80 (18.1)
40%	711 (161.1)	587 (133.0)	389 (88.1)	347 (78.6)	261 (59.1)	219 (49.6)	167 (37.8)	133 (30.1)
50%	867 (196.4)	805 (182.4)	580 (131.4)	526 (119.2)	406 (92.0)	341 (77.3)	260 (58.9)	209 (47.4)
Sustain 50%	458 (103.8)	461 (104.4)	283 (64.1)	268 (60.7)	193 (43.7)	161 (36.5)	125 (28.3)	99 (22.4)

Test method : Measured by ASTM D575-91 for reference

- Specimen Area : DIA.28.6mm (1.13in) • Platen Area : DIA. 28.6mm (1.13in) • Sustain 50% : Sustain 50% at 1 minute later
- Compression Velocity : 5.0mm/minute

GR14B-F0Unit: N/6.4cm² (psi)

Compression Rate	0.5mmT	1.0mmT	1.5mmT	2.0mmT
10%	110 (24.9)	233 (52.8)	208 (47.1)	144 (32.6)
20%	408 (92.4)	537 (121.7)	377 (85.4)	273 (61.9)
30%	760 (172.2)	844 (191.2)	609 (138.0)	460 (104.2)
40%	1129 (255.8)	1227 (278.0)	910 (206.2)	707 (160.2)
50%	1520 (344.4)	1619 (366.8)	1135 (257.1)	909 (205.9)
Sustain 50%	1133 (256.7)	880 (199.4)	549 (124.4)	425 (96.3)

GR14B-FH

Compression Rate	0.5mmT	1.0mmT	1.5mmT	2.0mmT
10%	241 (54.6)	222 (50.3)	223 (50.5)	154 (34.9)
20%	702 (159.0)	530 (120.1)	402 (91.1)	298 (67.5)
30%	1115 (252.6)	835 (189.2)	655 (148.4)	515 (116.7)
40%	1511 (342.3)	1220 (276.4)	985 (223.2)	802 (181.7)
50%	1960 (444.1)	1655 (375.0)	1249 (283.0)	1024 (232.0)
Sustain 50%	1569 (355.5)	998 (226.1)	648 (146.8)	508 (115.1)

Test method : Measured by ASTM D575-91 for reference

- Specimen Area : DIA.28.6mm (1.13in) • Platen Area : DIA. 28.6mm (1.13in) • Sustain 50% : Sustain 50% at 1 minute later
- Compression Velocity : 5.0mm/minute

DURABILITY

Test Property	Unit	70°C		150°C	
		Initial	After 1,000hrs	Initial	After 1,000hrs
Specific Gravity	-	1.8	1.8	1.8	1.8
Hardness	Shore OO	32	31	32	33
Breakdown Voltage	kV/mm	16	16	16	15
Thermal Conductivity	W/m·K	1.5	1.5	1.5	1.5

Test Property	Unit	60°C/95%RH		-40°C	
		Initial	After 1,000hrs	Initial	After 1,000hrs
Specific Gravity	-	1.8	1.8	1.8	1.8
Hardness	Shore OO	32	34	32	30
Breakdown Voltage	kV/mm	16	19	16	18
Thermal Conductivity	W/m·K	1.5	1.5	1.5	1.5

Test Property	Unit	-40°C(30min)⇄+125°C(30min)	
		Initial	After 1,000hrs
Specific Gravity	-	1.8	1.8
Hardness	Shore OO	32	32
Breakdown Voltage	kV/mm	16	17
Thermal Conductivity	W/m·K	1.5	1.5

- Specimen : GR14B-00 • Test method of Thermal Conductivity base on Fujipoly Test Method, FTM P-1612 by Hot Disk.

reduced temperature

-40°C = -40°F

60°C = 140°F

70°C = 158°F

125°C = 257°F

150°C = 302°F

TYPES AND CONFIGURATION

Series	Product Name	Thickness	Sheet Size
SARCON GR14B-00	GR14B-00-50PK	0.5mm ± 0.05mm	300mm × 200mm (Recommended Usable Size: 290mm×190mm)
	GR14B-00-100PK	1.0mm ± 0.10mm	
	GR14B-00-150PK	1.5mm ± 0.15mm	
	GR14B-00-200PK	2.0mm ± 0.20mm	
	GR14B-00-250PK	2.5mm ± 0.25mm	
	GR14B-00-300PK	3.0mm ± 0.30mm	
	GR14B-00-350PK	3.5mm ± 0.35mm	
	GR14B-00-400PK	4.0mm ± 0.40mm	
	GR14B-00-450PK	4.5mm ± 0.45mm	
	GR14B-00-500PK	5.0mm ± 0.50mm	
SARCON GR14B-0H	GR14B-0H-50PK	0.5mm ± 0.05mm	300mm × 200mm (Recommended Usable Size: 290mm×190mm)
	GR14B-0H-100PK	1.0mm ± 0.10mm	
	GR14B-0H-150PK	1.5mm ± 0.15mm	
	GR14B-0H-200PK	2.0mm ± 0.20mm	
	GR14B-0H-250PK	2.5mm ± 0.25mm	
	GR14B-0H-300PK	3.0mm ± 0.30mm	
	GR14B-0H-350PK	3.5mm ± 0.35mm	
	GR14B-0H-400PK	4.0mm ± 0.40mm	
	GR14B-0H-450PK	4.5mm ± 0.45mm	
	GR14B-0H-500PK	5.0mm ± 0.50mm	
SARCON GR14B-F0	GR14B-F0-50PK	0.5mm ± 0.15mm	300mm × 200mm (Recommended Usable Size: 290mm×190mm)
	GR14B-F0-100PK	1.0mm ± 0.20mm	
	GR14B-F0-150PK	1.5mm ± 0.20mm	
	GR14B-F0-200PK	2.0mm ± 0.30mm	
SARCON GR14B-FH	GR14B-FH-50PK	0.5mm ± 0.15mm	300mm × 200mm (Recommended Usable Size: 290mm×190mm)
	GR14B-FH-100PK	1.0mm ± 0.20mm	
	GR14B-FH-150PK	1.5mm ± 0.20mm	
	GR14B-FH-200PK	2.0mm ± 0.30mm	

HANDLING NOTES

- It is recommended to use the material in up to 30% of compression ratio. Using the material beyond the recommended compression rate may result in excessive silicone oil exudation.
- It is recommended to compress the material with the equal ratio on the whole surface. Partial excessive stress may also result in excessive silicone oil exudation.

WARRANTY STATEMENT

- Fujipoly has been utilizing Hot Disk method and TIM Tester method since Fujipoly defined them as Fujipoly standard.
- Properties of the products may be revised due to some changes for improving performance.
- Properties values in this document are not specification or guaranteed.
- This product is made of silicone, and silicone oil may exude from the product.
- This product is made of silicone, and low molecular siloxane may vaporize depending on operating conditions.
- The product is designed, developed, and manufactured for general industrial use only. Never use for medical, surgical, and/or relating purposes. Never use for the purpose of implantation and/or other purposes by which a part of or whole product remains in human body.
- Before using, a safety must be evaluated and verified by the purchaser.
- Contents described in the document do not guarantee the performances and qualities required for the purchaser's specific purposes. The purchaser is responsible for pre-testing the product under the purchaser's specific conditions and for verifying the expected performances.
- Statements concerning possible or suggested uses made herein may not be relied upon, or be constructed, as a guaranty of no patent infringement.
- Copyright© 2022 Fujipoly