SUBMITTAL DATA SHEET

AUX R32 - The Free Match Inverter Series - AFEB24HP230V1SD

Job Name _____ Location _____ Date _____

Purchaser _____ Engineer _____

For ☐ Reference ☐ Approval ☐ Construction

Submitted to _____ Schedule # _____

Unit Designation _____



AFEB24HP230V1SD

- ❖ Flexible air intake
- ❖ Two-way drainage
- ❖ Removable control box
- ❖ Fresh air intake
- ❖ Larger static pressure range
- ❖ Constant air volume

Slim Duct Indoor Unit			
Indoor Unit			**AFEB24HP230V1SD**
Capacity	Cooling	Btu/h	24000
	Heating	Btu/h	24600
Electrical	Power Supply	V~, Hz, Ph	208~230,60,1
	Input Current	A	1.06
Indoor Unit	Air Flow Rate (Tu/Hi/Mi/Lo)	CFM	795/747/647/529
	Sound Pressure Level	dB(A)	42
	Static Pressure	in. W.C.	0.1(0~0.32)
	Net Dimensions (W×D×H)	inch	39.37×27.56×9.65
		mm	1000×700×245
	Package Dimensions (W×D×H)	inch	48.43×32.68×11.81
		mm	1230×830×300
	Net / Gross Weight (Body)	lbs	59.5/70.5
Piping	Liquid Side	in. [mm]	1/4 [6.35]
	Gas Side	in. [mm]	5/8 [15.88]


Remarks:

1. All specifications are subject to change by the manufacturer without prior notice.
2. All units are being tested and comply to AHRI 210/240-2024. Indoor-unit capacities are nominal; system ratings depend on the matched outdoor unit.
3. Sound pressure levels are measured in anechoic chamber. During actual operation, sound pressure level will be higher as a result of room specification condition.
4. Data from AUX lab, 08/03/24. Data may change according to test surroundings; AUX reserves right of explanation on data.

Page 1 of 2 · © 2026 Aux Cloud Commerce (USA) Inc. All rights reserved

Dimensions

Indoor Unit
AFEB24HP230V1SD

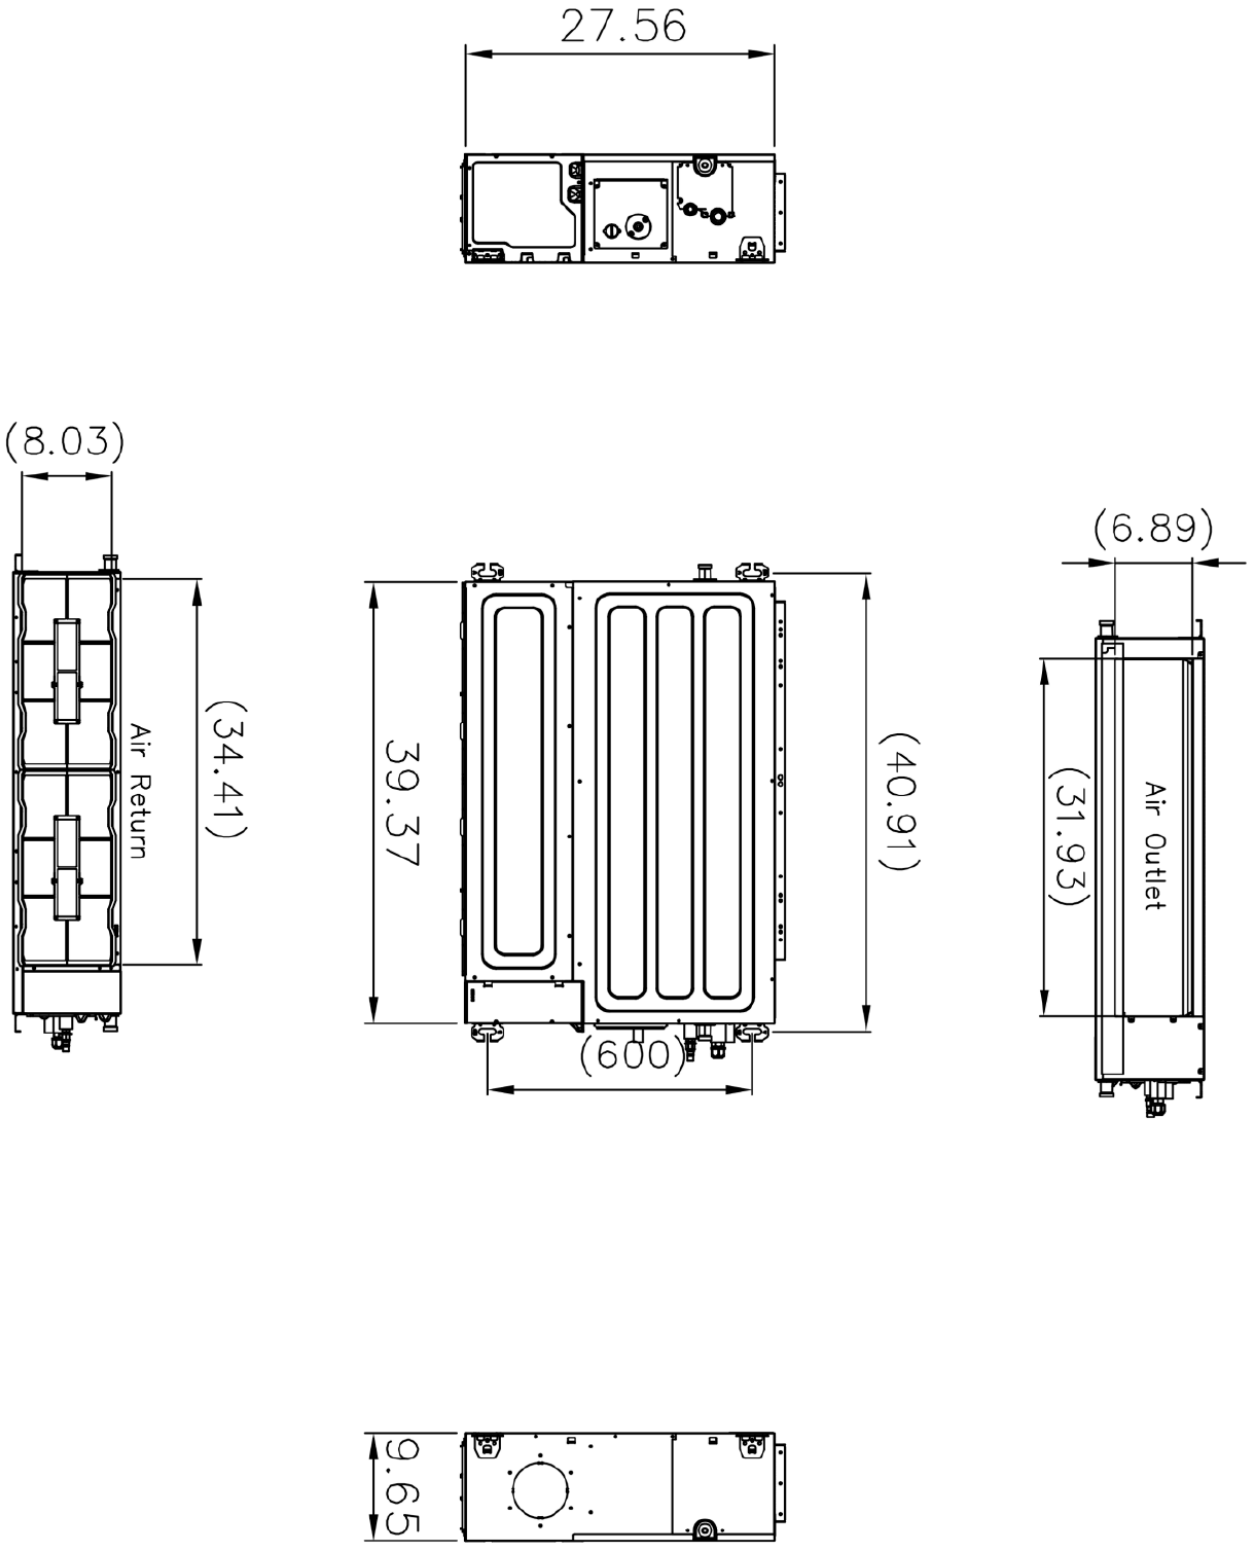

 © 2026 Aux Cloud Commerce (USA) Inc. All rights reserved