SUBMITTAL DATA SHEET

AUX R32 - The Free Match Inverter Series - AFEB09HP230V1SD


Job Name _____ Location _____ Date _____

Purchaser _____ Engineer _____

For ☐ Reference ☐ Approval ☐ Construction

Submitted to _____ Schedule # _____

Unit Designation _____



AFEB09HP230V1SD

- ❖ Flexible air intake
- ❖ Two-way drainage
- ❖ Removable control box
- ❖ Fresh air intake
- ❖ Larger static pressure range
- ❖ Constant air volume

Slim Duct Indoor Unit			
Indoor Unit			**AFEB09HP230V1SD**
AHRI Ref. No. (single-zone with AFEB09HP230V1CO-U)			**218332331**
Capacity	Cooling	Btu/h	9100*
	Heating	Btu/h	10000*
Electrical	Power Supply	V~, Hz, Ph	208~230,60,1
	Input Current	A	0.6
Indoor Unit	Air Flow Rate (Tu/Hi/Mi/Lo)	CFM	353/333/286/236
	Sound Pressure Level	dB(A)	34
	Static Pressure	in. W.C.	0.1(0~0.2)
	Net Dimensions (W×D×H)	inch	27.56×17.72×7.8
		mm	700×450×198
	Package Dimensions (W×D×H)	inch	34.25×21.3×10.24
		mm	870×540×260
	Net / Gross Weight (Body)	lbs	27.6/33.1
Piping	Liquid Side	in. [mm]	1/4 [6.35]
	Gas Side	in. [mm]	3/8 [9.52]


Remarks:

1. All specifications are subject to change by the manufacturer without prior notice.
2. Ratings marked * are AHRI-certified (AHRI 210/240-2024) and match the AHRI Directory (ahridirectory.org) for the reference number(s) above as of October 2026.
3. Sound pressure levels are measured in anechoic chamber. During actual operation, sound pressure level will be higher as a result of room specification condition.
4. Data from AUX lab, 08/03/24. Data may change according to test surroundings; AUX reserves right of explanation on data.

 © 2026 Aux Cloud Commerce (USA) Inc. All rights reserved

Dimensions

Indoor Unit
AFEB09HP230V1SD

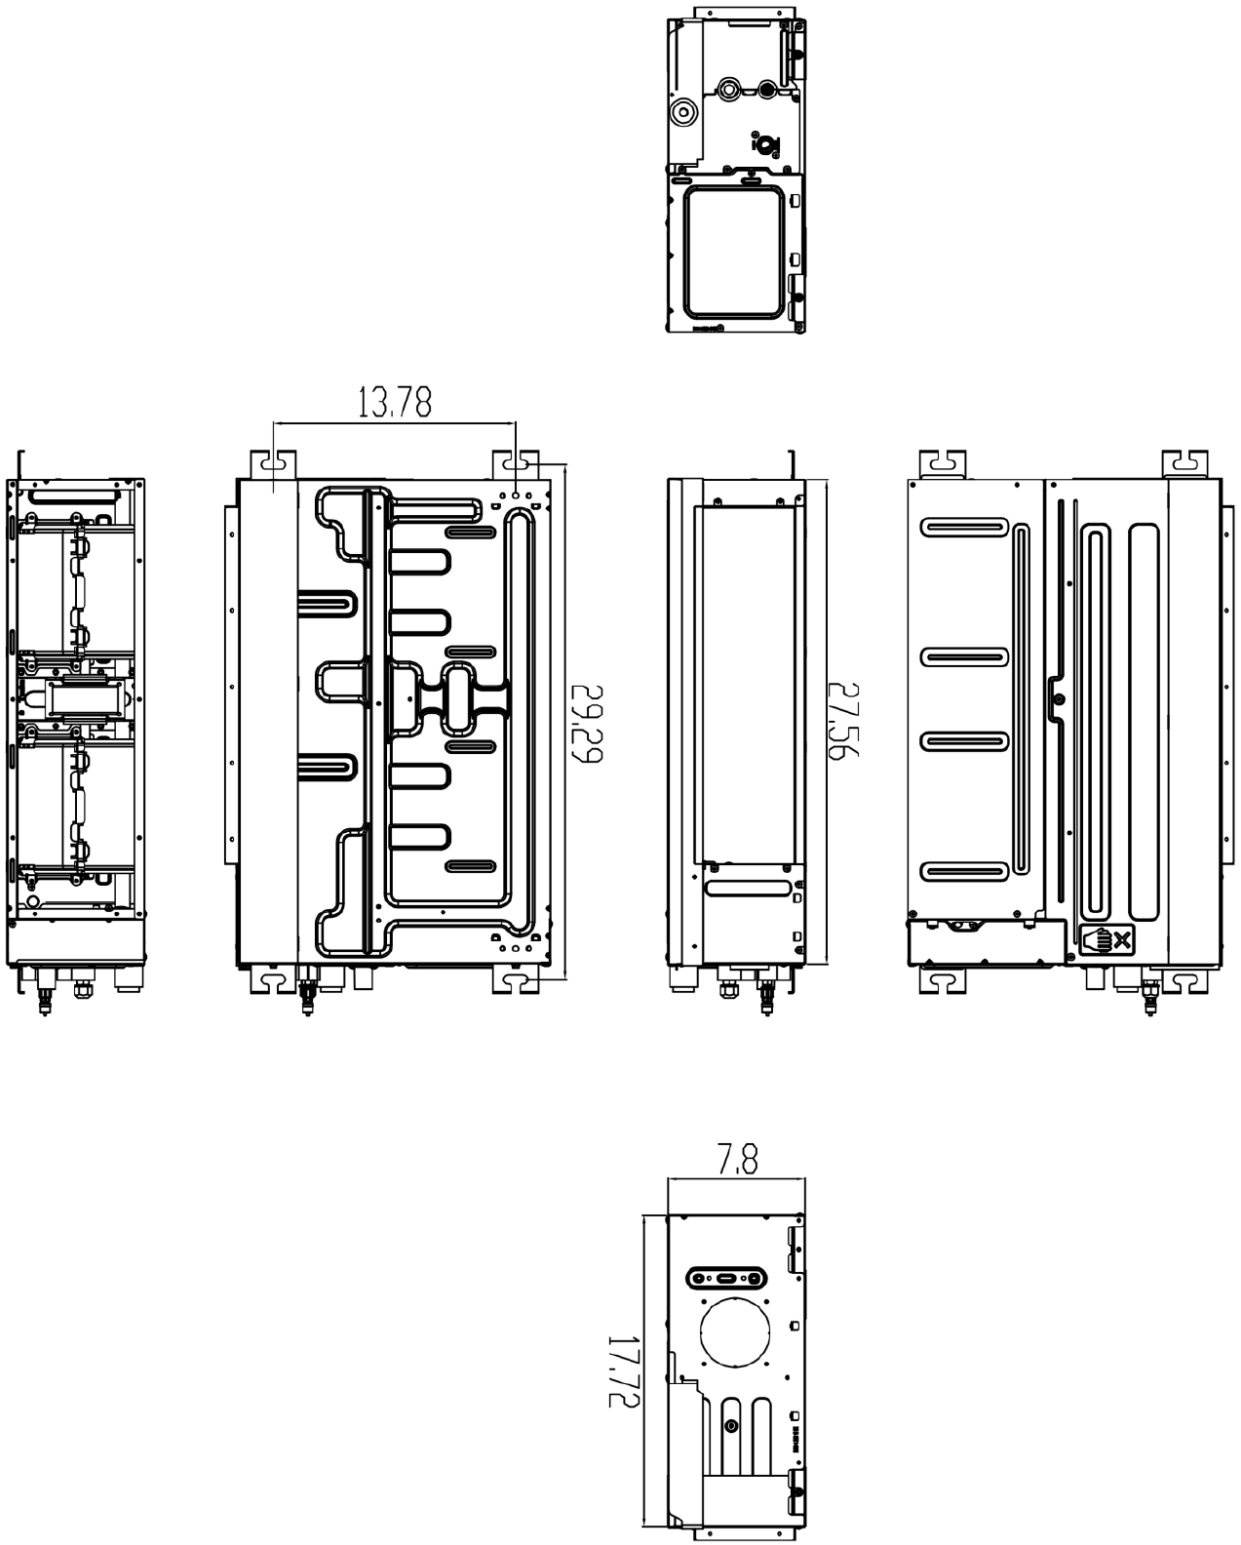

 © 2026 Aux Cloud Commerce (USA) Inc. All rights reserved