


SECOND ISOBUS SCREEN

NON ISOBUS TRACTOR SCREEN CONVERSION

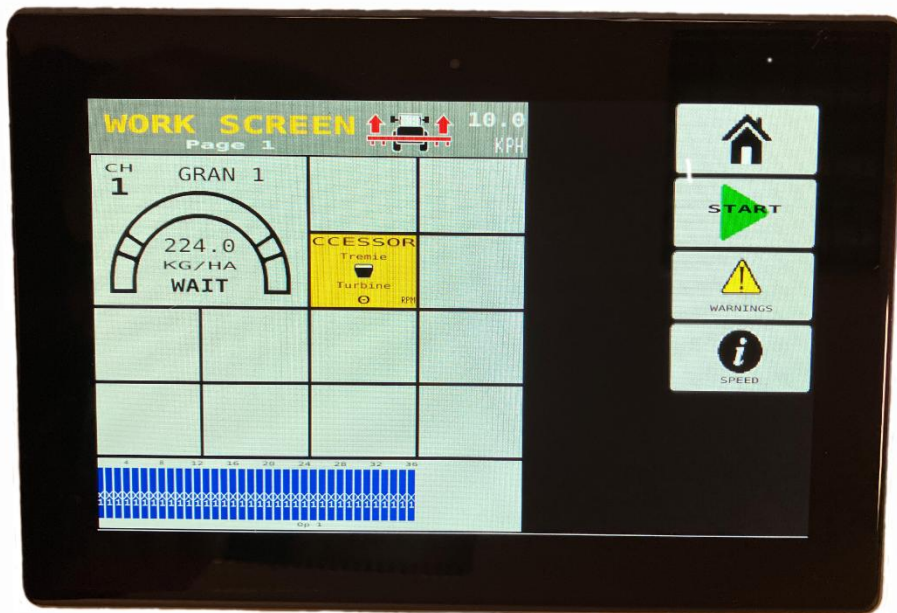

Great visual comfort

7" Screen TFT 800 × 480 pixels, brightness and contrast for outdoor use.
Tactile capacitive screen, can be use with gloves

Fast

Ultra fast Processor 528 MHz
Live memory: 256 Mo RAM
Storage: 2 Go

For more reliability

Robust glass and plastic shell PC/ABS (Autotex finish XEF200)
Power supply: 9 à 36 V DC
Operating temp: -30°C to +75°C
Water resistant: IP66 / IP67, résistant to chocs and vibrations

Simple

Connects direct to the 9 pins ISOBUS INCAB