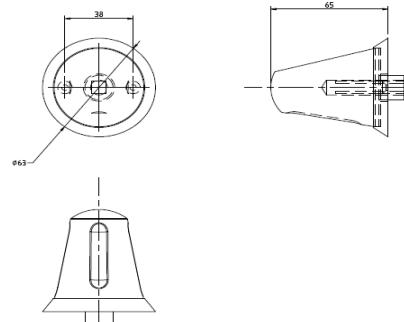


Description

Anti-Ligature Unsprung Lever/Knob Set at 45 Degrees,
63m/50m Rose


Technical Features

Function & Operation	Lever handle fitted with mortice knob designed to remove the ligature point provided by normal door hardware
Summary of Features	Anti-ligature lever, set at 45 degrees on a 50mm rose bolted to a knob, that is designed so that when pressure is applied, or a ligature is attached, the lever drops down to 90 degrees, causing a ligature to slip off. The inside of the room utilizes the knob allowing a higher level of ligature resistance inside the room with a higher pull factor on the outside still retaining anti ligature properties both sides

Options

lever rose can be 50mm or 63mm
split follower spindle
powder coated

Dimensions
Dimensions

50mm diameter rose and fixings at 38mm centres supplied with 2 M4 fixing screws into a 50mm knob on a 63mm rose Satin Stainless Steel or Aluminium

Finishes
Finishes Available
Certification

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a (No Harmonised European Norm)
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	dhf ts2001

BIM Assist™
BC(A)R Assist™*
Guarantee
10 Year

Last Reviewed

30/01/2020

* ROI Only

Description

Anti-Ligature Unsprung Lever/Knob Set at 45 Degrees,
50mm Rose

**Specification Text****LEVER HANDLES**

- Manufacturer: DORTREND
- Product reference: ANTNS7
- Style: Anti-Ligature Lever/knob Set at 45 Degrees
- Size: 50/63mm diameter rose and fixings at 38mm centres
- Material/ finish: [stainless steel]
- Mounting: Bolt through fixings
- Additional requirements: Unsprung

