



High-Performance Industrial and Decorative Coatings



SYSTEM

DECO-GUARD

FLAKE FINISHED URETHANE MORTAR FLOOR SYSTEM WITH
POLYASPARTIC TOPCOAT

system
243

DECO-GUARD 243 is a 1/8" to 3/16" urethane concrete with a flake broadcast. 243 is specifically formulated for areas which are prone to swings in temperatures or thermal cycling. A major benefit of this system is that it is resistant to high moisture results from ASTM F-1869 and F-2170. The decorative flake broadcast is sealed with clear, UV-resistant polyaspartic.

COMMON APPLICATIONS

Floor areas where beauty, cleanability and thermal shock are all critical performance characteristics. Typically installed over clean prepared concrete. Specific applications include, but are not limited to: institutional and correctional kitchens, food and beverage manufacturing, cage wash areas, vivariums, clean rooms and retail showrooms.

COMPONENTS

F-52 SL-28 or SL-36 / F-61, F-71 or F-81 / 1323 / 1375

LEED MATRIX [NC 2009]

	YES	NO
MRc1.1 Building Reuse	✓	
MRc2 Construction Waste Management	✓	
MRc4.1 Recycled Content	✓	
MRc6 Rapidly Renewable Materials		✓
IEQc4.2 Low Emitting Materials	✓	


PHYSICAL PROPERTIES

Description	Standard	Results
Tensile Strength	ASTM C307	2,600 p.s.i.
Compressive Strength	ASTM C579	12,000 p.s.i.
Modulus of Elasticity	ASTM C580	N/A
Flexural Strength	ASTM C580	4,500 p.s.i.
Impact Resistance	ASTM D2794	>160 inch pounds
Abrasion Resistance CS17 1000 g	ASTM D4060	0.022g Loss*
Flammability When Adhered to Concrete	ASTM D635	Self-Extinguishing
Adhesion to Concrete	ASTM D7234	>450 Substrate failure
Wet SCOF (Static Coefficient of Friction)	ASTM E303	Match Specification
Accelerated Weathering Testing	ASTM G154	UV Stable

Physical properties can be improved by selecting different components. Should you require higher performance than our base system components, please speak to a Polymer Nation Coating Engineer.

* when higher abrasion resistance is required the addition of PN 1336 to the coating should be included.



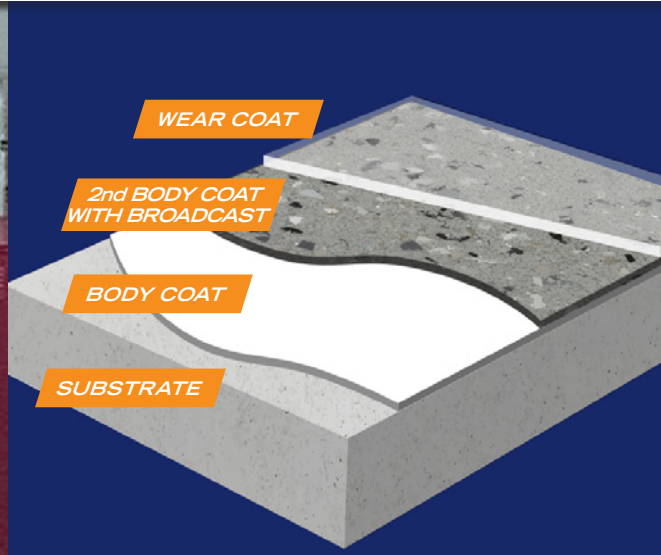

● OPTIONS

Cove Bases: Available

Colors: see back panel

	A	B	C
Texture	✓	✓	

Polymer Nation offers 3 categories of finish Textures. Texture A is our smoothest finish. Texture B is our mid-level slip resistant finish and Texture C is our highest level slip resistant finish. Custom textures can be engineered to meet specific design requirements. A mock up is recommended as the best way to ensure customer satisfaction.

Waterproofing Membrane: Available

Optional Finish Coats:

U-21 G, LL No VOC, clear, waterborne, Urespartic™, gloss or low luster, UV, graffiti and abrasion, resistant, LEED compliant.

U-51 with #1335 or similar

Antimicrobial: Available

PN 1498 MICRO-GUARD


Proprietary Anti-Microbial Pathogen Additive

What is PN MICRO-GUARD?


- PN MICROGUARD is ionic silver, bound in an inorganic matrix which hinders microbial growth and kills the bacteria
- 99.9997 % reduction of bacteria, fungi and actinomycetes

Advantages of PN MICRO-GUARD!

- Safety: Low Toxicity, long history of use
- EPA & FDA Registered for products in USA
- Longevity, accelerated testing shows 3-7 years
- Compounded throughout the material
- Adequate reservoir of silver at the surface level that does not require abrading to activate
- Not affected by surface wear



With MICRO-GUARD













Without MICRO-GUARD

For additional or custom system configurations, please contact your Polymer Nation Consultant.

COLORS

FLAKE BLENDS



POLYMER NATION
(847) 774-5038 | polymernation.com

243-02-26

In the unlikely event of a problem, a resolution is one phone call away with the assurance that the blame game will not be a part of the process. Our goal is to develop long lasting relationships with our customers.

WE PLEDGE TO DO WHATEVER WE CAN TO BRING OUR CUSTOMERS THE HIGHEST LEVEL OF SATISFACTION!