


ULTRA DRAIN PLUS

HIGH PERFORMANCE LINEAR DRAINAGE

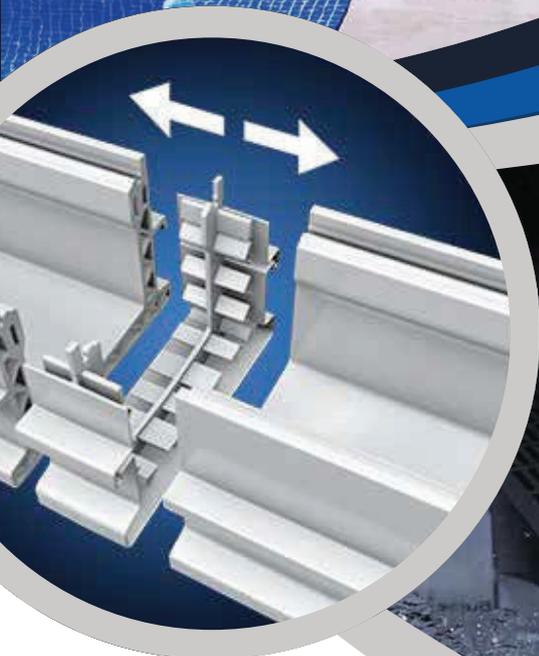

europelimports

suppliers of Quality

NATIONAL SPASA MULTI AWARD WINNERS
2018 • 2019 • 2020



The Ultimate Linear Drainage System

Ultra Drain Plus has proven to be a market leader in its field, worldwide. We confidently provide quality products that will stand the test of time. All the products that we manufacture use only the highest quality virgin raw materials for both our PVC and aluminium related products.

- ▶ Anodised Marine Grade Aluminium
- ▶ 2m Lengths
- ▶ 6° In-built Channel Fall
- ▶ Up to 875 L/M Waterflow Rating
- ▶ Interlocking Fittings
- ▶ Stability for light vehicular traffic
- ▶ Customisable Options
- ▶ Ease of Installation
- ▶ Customer's & Builder's Choice



Our Ultra Drain Plus Base Channel

The Ultra Drain core fluted drain has revolutionised the traditional ways of manufacturing drain bases and with the smooth contours allows for the water to move smoothly and quickly to the point of discharge.


The Ultra Drain Plus range consists of four sizes, namely: UDP45, UDP75, UDP100 and UDP130 and has interlocking fittings, which negates the need for a joiner to attach each fitting. Each component locks together in a similar way to "Lego" thereby creating a smooth flow with no lipping.

Extruded in 100% virgin PVC materials our Ultra Drain Plus channels and plastic components are 100% recyclable and that is a great contribution to our clean and green environment.


Our Ultra Drain Plus Top Grating

Our marine grade anodised aluminium grating has been a huge breakthrough from the conventional type of grating such as: plastic and stainless steel. Our sophisticated design has allowed Ultra Drain to evolve over the past years and make it a "stand out" in the marketplace. The horizontal slots provide protection against leaves and it is considered a "heel guard" product. Other key benefits are its low weight, high strength and excellent corrosion resistance.

Ultra Drain is engineered to a level that can easily be connected with its unique range of fittings. Standard PVC plumbing fittings are used which makes Ultra Drain a user friendly product. PVC solvent cement is used to affix fittings in place.

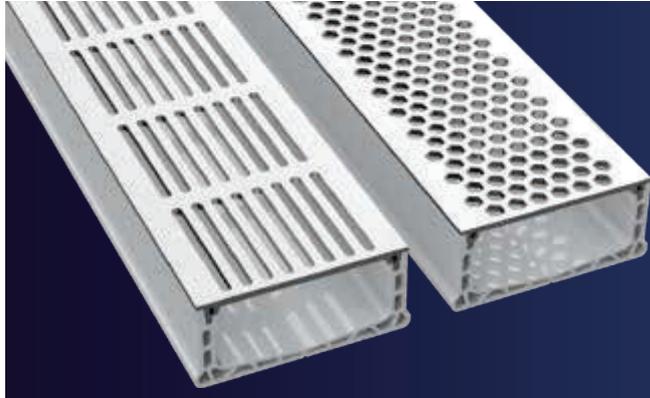

UDP45 | ULTRA DRAIN PLUS 45

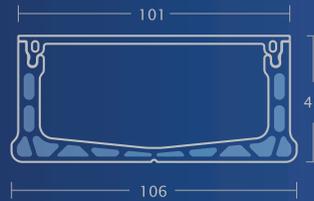

Water Flow 330 L/M
Open End Discharge 0.5 Fall to Cesspit

Horizontal Top Standard / Honeycomb on Indent

Parts & Fittings



- ① Spigot
- ② Bottom Outlet
- ③ Right Angle Corner
- ④ End Cap
- ⑤ Joiner
- ⑥ Construction Cover


Ideal for where shallow screeds are required to ensure the concrete integrity is not compromised. Available in 2000mm lengths with a spigot that is completely flexible as to where it is to be fitted and for larger water flows a 60mm bottom outlet is available. This product with its a high water flow rate of 330 L/M allows for it to be used in a balcony, driveway, kitchen, wineries, pool and landscaping applications.

Product Designed for DWV Pipe Sizing

UDP45	OD
Spigot	60mm
Bottom Outlet	69mm
Length	2000mm



UDP75 | ULTRA DRAIN PLUS 75

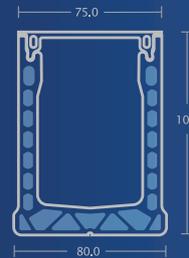

Water Flow 545 L/M
Open End Discharge 0.5 Fall to Cesspit

Horizontal Top Standard / Honeycomb on Indent

Parts & Fittings



- ① End Outlet
- ② Bottom Outlet
- ③ Right Angle Corner
- ④ End Cap
- ⑤ Joiner
- ⑥ Side Outlet
- ⑦ Construction Cover


The Model UDP75 is ideally suited for numerous applications both indoors and outdoors where visual aesthetics need to be maintained and yet still give good weathering and durability. This product with its high water flow of 545 L/M allows for it to be used in driveways, commercial kitchens, wineries, pool and landscaping projects where high-quality is required.

Product Designed for DWV Pipe Sizing

UDP75	OD
End Outlet	69mm
Side Outlet	56mm
Bottom Outlet	69mm
Length	2000mm



UDP100 | ULTRA DRAIN PLUS 100

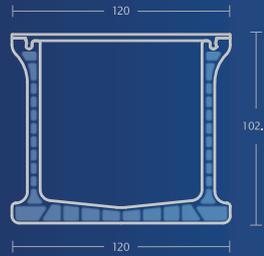

Water Flow 825 L/M
Open End Discharge 0.5 Fall to Cesspit

Horizontal Top Standard / Honeycomb on Indent

Parts & Fittings



- 1 End Outlet
- 2 Bottom Outlet
- 3 Right Angle Corner
- 4 End Cap
- 5 Joiner
- 6 Side Outlet
- 7 Construction Cover

The UDP100 is equally suitable for driveways, wineries, tennis courts, pool and landscaping projects but with a water flow of 825 l/m means it can be used where removal of more water is necessary.


The Ultra Drain Alloy grating is extruded in 6063A Aluminium which provides a high tensile top with very consistent extruding qualities. This is then marine anodised to give a very highly corrosive resistant product.

Product Designed for DWV Pipe Sizing

UDP100	OD
End Outlet	68mm
Side Outlet	68mm
Bottom Outlet	68mm
Length	2000mm



UDP130 | ULTRA DRAIN PLUS 130

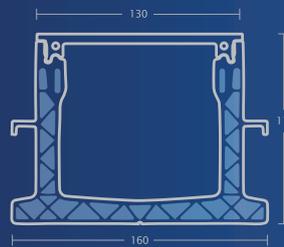

Water Flow 875 L/M
Open End Discharge 0.5 Fall to Cesspit

Horizontal Top Standard / Honeycomb on Indent

Parts & Fittings




- 1 End Outlet
- 2 Bottom Outlet
- 3 Right Angle Corner
- 4 End Cap
- 5 Joiner
- 6 Side Outlet
- 7 Construction Cover

The UDP130 is the Maestro of our Ultra Drain range to date. A great product for the architect or specifier to recommend with 100% confidence knowing that many years of research and development has gone into developing the new Ultra Drain Plus range. This product has been specifically designed to be used where robustness is required and yet maintaining a very high visual appearance combined with a large water flow of 875L/M still being achieved.

Product Designed for DWV Pipe Sizing

UDP130	OD
End Outlet	69mm
Side Outlet	69mm
Bottom Outlet	82mm
Length	2000mm

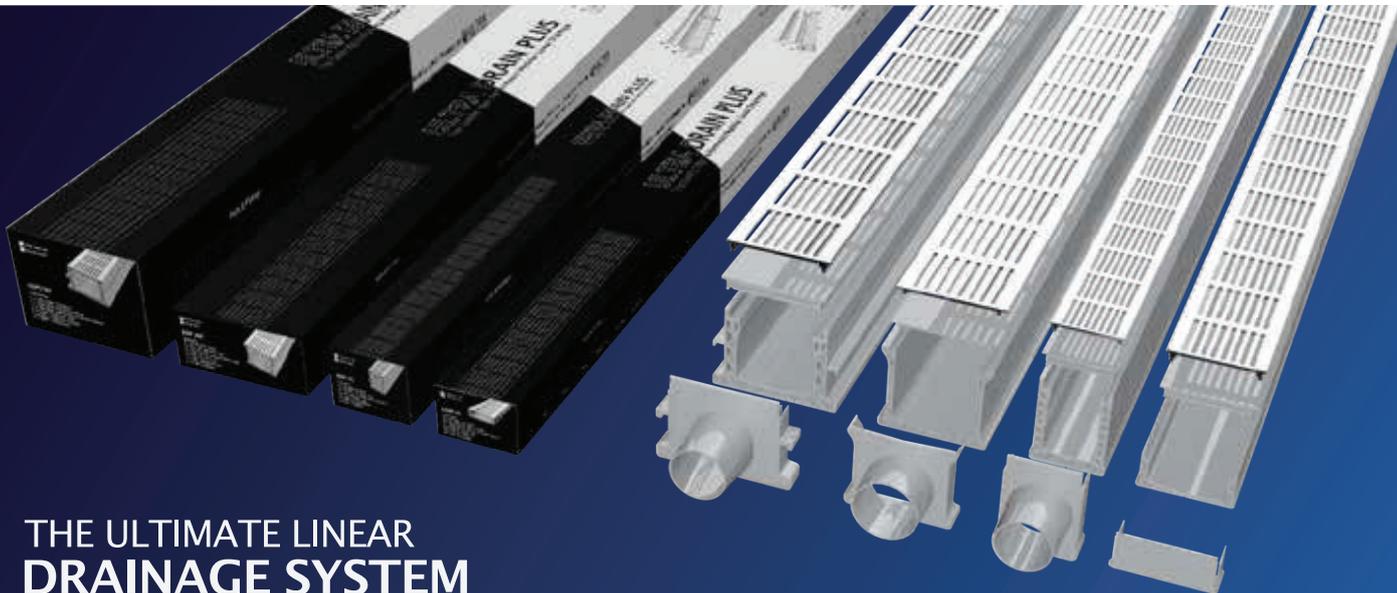

THE ULTIMATE LINEAR DRAINAGE SYSTEM

AVAILABLE WORLDWIDE : UDP45 / UDP75 / UDP130 / UDP100

AVAILABLE PACKING



UDP 45

1-PIECE PACK

- 1x 2M Drain Base
- 1x 2M Alloy Top Grating
- 1x 2M Construction Cover
- 1 x Joiner
- 2 x End Cap
- 1 x Spigot

2-PIECE PACK

- 2x 2M Drain Base
- 2x 2M Alloy Top Grating
- 2x 2M Construction Cover
- 2 x Joiner
- 2 x End Cap
- 2 x End Outlet

Width			Height
I.D.	O.D.	Overall I.D.	
85mm	101mm	106mm	45mm
Length: 2000mm			



UDP 75

1-PIECE PACK

- 1x 2M Drain Base
- 1x 2M Alloy Top Grating
- 1x 2M Construction Cover
- 1 x Joiner
- 1 x End Cap
- 1 x End Outlet

2-PIECE PACK

- 2x 2M Drain Base
- 2x 2M Alloy Top Grating
- 2x 2M Construction Cover
- 2 x Joiner
- 2 x End Cap
- 1 x End Outlet

Width			Height
I.D.	O.D.	Overall I.D.	
55mm	75mm	80mm	105mm
Length: 2000mm			



UDP 100

1-PIECE PACK

- 1x 2M Drain Base
- 1x 2M Alloy Top Grating
- 1x 2M Construction Cover
- 1 x Joiner
- 1 x End Cap
- 1 x End Outlet

2-PIECE PACK

- 2x 2M Drain Base
- 2x 2M Alloy Top Grating
- 2x 2M Construction Cover
- 2 x Joiner
- 2 x End Cap
- 1 x End Outlet

Width			Height
I.D.	O.D.	Overall I.D.	
89mm	120mm	120mm	102.5mm
Length: 2000mm			



UDP 130


1-PIECE PACK

- 1x 2M Drain Base
- 1x 2M Alloy Top Grating
- 1x 2M Construction Cover
- 1 x Joiner
- 1 x End Cap
- 1 x End Outlet

Width			Height
I.D.	O.D.	Overall I.D.	
100mm	130mm	160mm	115mm
Length: 2000mm			

Have a look at some of our Projects

Take a peek inside our Ultra Drain products

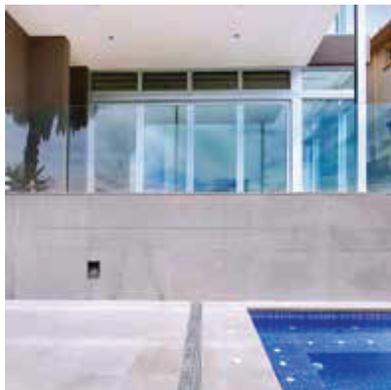

ULTRA DRAIN PLUS


INSTALLATION GUIDE



- 1 Remove the Ultra Drain Plus product from the box.

Carefully store the Ultra Drain Alloy grating away from the construction site until all the concreting and tiling has been completed.


DO NOT REMOVE the construction cover insert from the Ultra Drain Plus base.

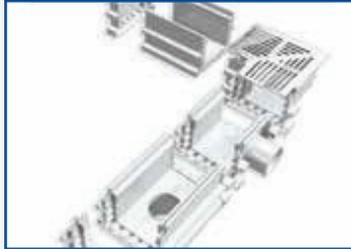

- 2 Establish the parts you need to use.




- 3 Use PVC glue in connecting the modular drain. Apply PVC glue on each part that you are joining and as per your drainage design fix right angle corners and the outlets in their correct position.

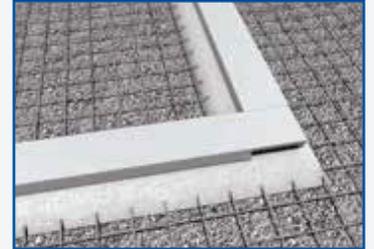

- 4 Once you have established the finished height and fall of the drain, haunch the Ultra Drain Plus into place. Using either a concrete mix or sand and cement, ensure that the construction cover insert stays neatly fitted at all times in the Ultra Drain Plus base.

DO NOT REMOVE the construction cover insert from the Ultra Drain Plus base until the tiling and concreting are fully completed.

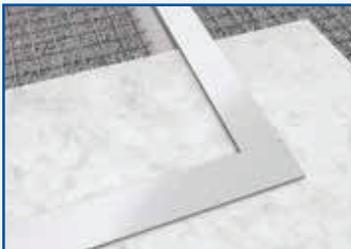

- 5 Pour the concrete around the haunched drain base to the selected finished height required for your next step either tiling or finished concrete.

Ensure that the drain stays straight and clean at all times during the concrete pouring process.

DO NOT REMOVE the construction cover insert from the Ultra Drain Plus base until the tiling and concreting are fully completed.



- 6 You are now ready to tile or put your selected finishing product in place.

We recommend that between your tile and the drain the use of a flexible product like silicone or polythene to avoid any possibility of movement between the two different products. A 4mm joint is recommended to avoid possible movement and cracking.

DO NOT REMOVE the construction cover insert from the Ultra Drain Plus base until the tiling and concreting are fully completed.



- 7 Your Ultra Drain installation is now ready to be completed. Remove the construction cover insert and discard in an environmentally friendly manner.

Now clip the Ultra Drain Alloy top into place. Start clipping from one end by gently pushing the alloy top into the plastic drain base.

If there is any cleaning required ensure that only PH Neutral products are being used. Acid or highly alkaline solutions may damage the alloy top.



- 8 Your installation of the high quality Ultra Drain Plus product is now complete and will maintain its unique sleek look for many years to come.

WARNING

- These channels are NOT intended for use where heavy vehicular traffic is present (over 5 metric tons).
- Clean alloy top grating with pH neutral products only.
- Always store in a cool dry place.
- Do not store in direct sunlight.

europ@imports

suppliers of Quality

www.europeimports.com.au

Phone: 1300 EUROPE (387-673)

Email: sales@europeimports.com.au

Showroom: Unit 8 & 9, 360 Vardy's Road, Kings Park NSW 2148