



**Product overview**

A side-step from the traditional acoustic ceiling tile, 3D Ceiling Tiles are made from 100% polyester fiber and molded to form abstract, three-dimensional shapes. The 3D Ceiling Tile is designed to be direct fixed or fit within a standard ceiling grid; lightweight and semi-rigid for easy installation.

**Sustainable material**

- Carbon neutral product
- Zero carbon manufacturing
- Recycled content - 55% recycled material
- Low VOC and CDPH compliant - 0.0035 mg/m<sup>3</sup> (7 days)
- Zero waste manufacturing initiative
- Sustainable supply chain and anti-modern slavery

**Environmental certifications**

- EPD – compliant with ISO 14025 and EN 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



**Certifying your green building**

Autex Acoustics products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit [www.autexglobal.com](http://www.autexglobal.com), or speak with your Autex Acoustics account manager.

**Specification**

(Ceiling) treatment shall be 3D Ceiling Tiles from thermally molded, felted polyester material containing not less than 55% recycled material as manufactured by Autex. [www.autexglobal.com](http://www.autexglobal.com)

Classification: Group 1-S, EN13501-1:2007+A1:2009: B - s1, d2, ASTM E-84-14 Class A, FS:0 - SD:10

Install as per Autex Acoustics recommendations.

Tile (S-5-\_\_), color (\_\_), sound absorption: Class C, NRC 0.75. Fire rating ISO 9705:



## Product specifications

**Product name** 3D Ceiling Tiles S-5.26, S-5.28, S-5.34, S-5.53  
**Composition** 100% polyester fiber (PET)  
**Required grid size** 2' x 2' with 15/16<sup>th</sup> tee

### Installation

Designed to fit a 2' x 2' grid with a 15/16<sup>th</sup> tee. Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

Product name	S-5.26	S-5.28	S-5.34	S-5.53
Tile dimensions	23.75" x 23.75"	23.75" x 23.75"	23.75" x 23.75"	23.75" x 23.75"
Tile tolerance	(+0.2" (+0.2"))	(+0.2" (+0.2"))	(+0.2" (+0.2"))	(+0.2" (+0.2"))
Depth	3.25"	3.43"	2.52"	2.47"
Depth tolerance	(+0.2")	(+0.2")	(+0.2")	(+0.2")
Weight	5.51oz/ft <sup>2</sup>	5.51oz/ft <sup>2</sup>	5.51oz/ft <sup>2</sup>	5.51oz/ft <sup>2</sup>


## Acoustic performance

3D Ceiling Tiles are specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 3D Ceiling Tiles	0.15	0.45	0.65	0.90	0.90	0.80	0.75

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354.  
 University of Auckland Testing Service  
 3D Ceiling Tiles - Test No: T1012-3

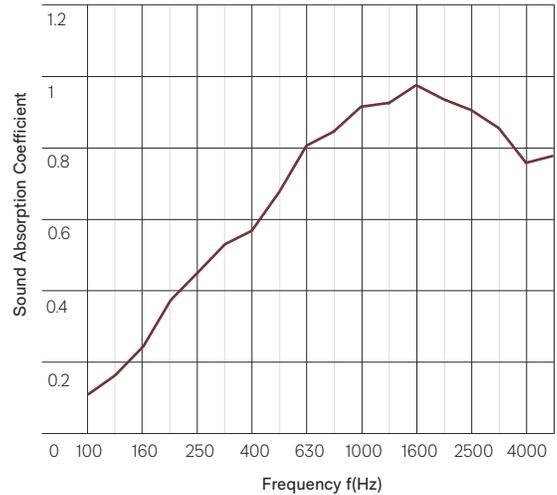

## Product specifications

**Product name** 3D Ceiling Tiles S-5.37  
**Composition** 100% polyester fiber (PET)  
**Required grid size** 2' x 2' with 15/16<sup>th</sup> tee

### Installation

Designed to fit a 2' x 2' grid with a 15/16<sup>th</sup> tee. Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

Product name	S-5.37
Tile dimensions	23.75" x 23.75"
Tile tolerance	(+0.2" (+0.2"))
Depth	5.57"
Depth tolerance	(+0.2")
Weight	5.51oz/ft <sup>2</sup>




## Acoustic performance

3D Ceiling Tiles are specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 3D Ceiling Tiles S-5.37 5.57"	0.15	0.65	0.60	0.70	0.75	0.70	0.65

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354.  
University of Auckland Testing Service  
3D Ceiling Tiles S-5.37 5.57" - Test No: T1316-4

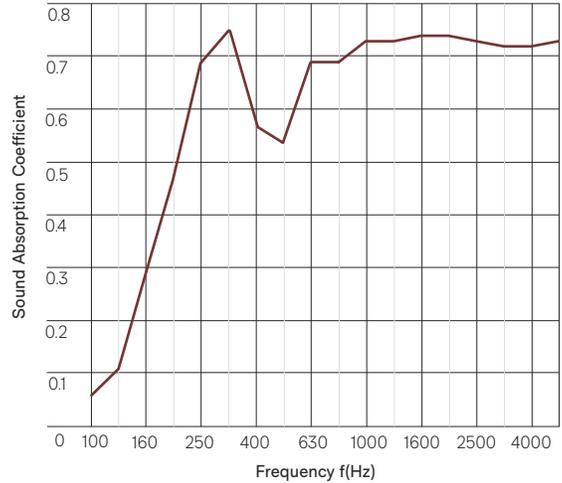

## Product specifications

### Fire ratings

3D Ceiling Tiles is a product made from Workstation as the base material. Workstation has been evaluated using the following test methods:

### ISO 9705: 1993

Classification: Group 1-S

Smoke production rate:

<5.0m<sup>2</sup>/s

As required by NZBC C/VM2

### AS ISO 9705 - 2003

Classification: Group 1

(SMOGR<sub>Arc</sub>): <100m<sup>2</sup>/s<sup>2</sup>

Assessed using methodology

AS ISO 9705:2003

in accordance with AS 56371:2015,

as required by BCA Specification C1:10-4

FAR 4055

### EN13501-1:2007

(6mm Workstation)

B - s1, d2

Report WF 336913

### ASTM E-84-14

Class A, FS:0 - SD:10

Report RJ3297

### Water vapor sorption

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapor absorbed and adsorbed after

4 days: 0.4% by weight.

### Microbial resistance

ASTM G21-15

Growth rating: 0 (No growth)

3D Ceiling Tiles do not

promote the growth of molds

and mildew.

### Color fastness to light

3D Ceiling Tiles are suitable for indoor use only.

Lightfastness is dependent on use and exposure. 3D Ceiling

Tiles have been evaluated to the following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

### Color fastness to rubbing

ISO 105-X12:2016

Dry rating: 4-5 (Highest = 5)

Wet rating: 4-5 (Highest = 5)

### Pattern repeat

Non-woven. No pattern repeat, but the product has a directional grain. Product may vary from samples and batch to batch due to fiber blending and lay-up, which is an inherent feature of this product.

### Fabric care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and using excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean, dry cloth after each application of the solution.

Custom printed 3D Ceiling Tiles require the services of a specialist cleaning company. Refer to the 3D Ceiling Tiles Care and Maintenance Guide for more information.

### Service

For further information about 3D Ceiling Tiles or any other Autex Acoustic product, please contact your account manager or visit our website.



## Light reflectance values by color

3D Ceiling Tiles are suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Acros	30	Muralla	7
Beehive	30	Petronas	1
Blazing Red	8	Pinnacle	2
Cavalier	10	Porcelain	22
Empire	3	Savoye	44
Falling Water	32	Simba	18
Flatiron	23	Tree House	2
Gherkin	5		

● **New Zealand**  
702-718 Rosebank Road,  
Private Bag 19988  
Avondale 1746, Auckland  
T 0800 428 839  
T +64 9 828 9179  
[www.autexacoustics.co.nz](http://www.autexacoustics.co.nz)

● **Australia**  
285 Swan Street,  
Richmond, VIC 3121  
T 1800 678 160  
T +61 3 9450 6700  
[www.autexacoustics.com.au](http://www.autexacoustics.com.au)

● **United Kingdom**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire  
HX5 9DA  
T +44 0 142 241 8899  
[www.autexacoustics.co.uk](http://www.autexacoustics.co.uk)

● **United States**  
1630 Dan Kipper Drive,  
Riverside, CA 92507  
T +1 424 203 1813  
[www.autexacoustics.com](http://www.autexacoustics.com)

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2023 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.