


IMPACT ACOUSTIC®

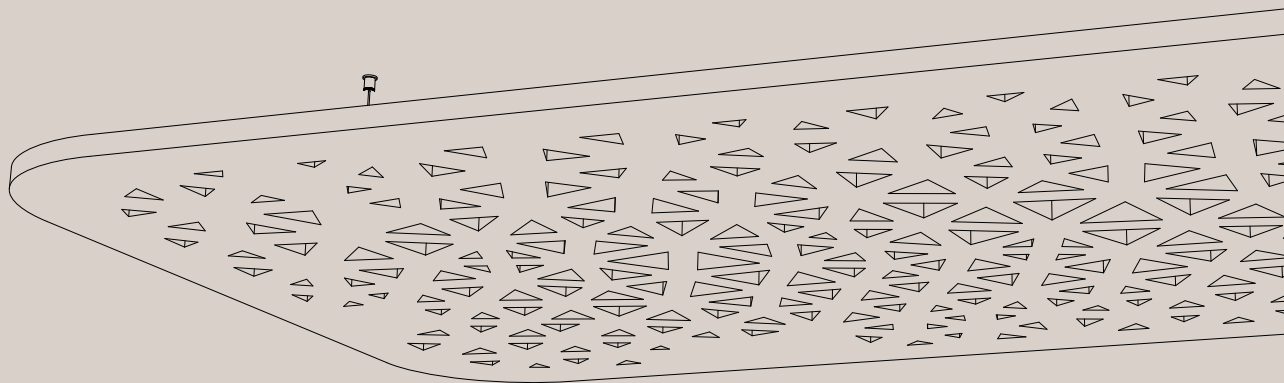

Web and Bubbles


Rectangle Ceiling Panels

711.24.14.000.10
711.24.14.000.12

TECHNICAL DATA SHEET

Web and Bubbles Rectangle Ceiling Panels

General Information

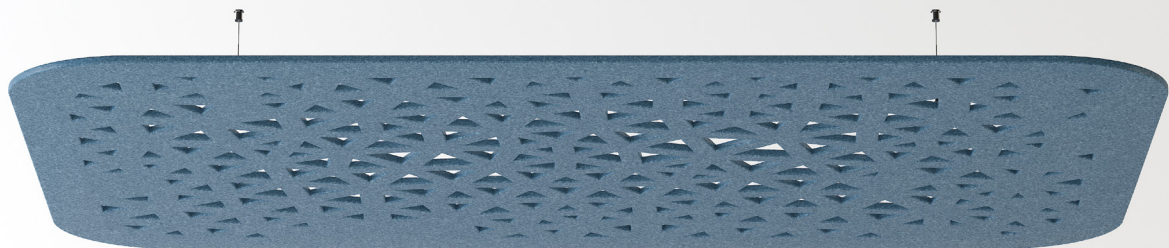

Data

Applicable article numbers

711.24.14.000.10 711.24.14.000.12


Dimensions¹

Width	1800mm	70.87"
Length	2400mm	94.49"
Material thickness	24mm	0.94"



Material

Panel	100% PET (60% post-consumer) in 32 colors.
Frame <i>(option)</i>	Stainless steel



Weight²

24mm PET Material	4kg/m ² kg (±10%)	0.82 lbs/ft ² (±10%)
-------------------	------------------------------	---------------------------------


(for specific product weight please refer to Geometry Information pages 6-14)

Included

Ceiling Panel



Installation Kit



Installation
guide



Warranty
2 years³




1 - all dimensions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

Web and Bubbles Rectangle Ceiling Panels


Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:




Ceiling Plans (RCP)




Ceiling Type

2 Specify your Baffles:




Size

page 5 and 6




Number of Modules

page 4



Color


page 8



Pattern


page 8

3 Verify installation method:



Direct gripper

page 7




Profile and clip

Web and Bubbles Rectangle Ceiling Panels

Product Family Overview


3 Ceiling Panels Perforated

711.24.14.000.10 - Ceiling Panel Rectangle Web

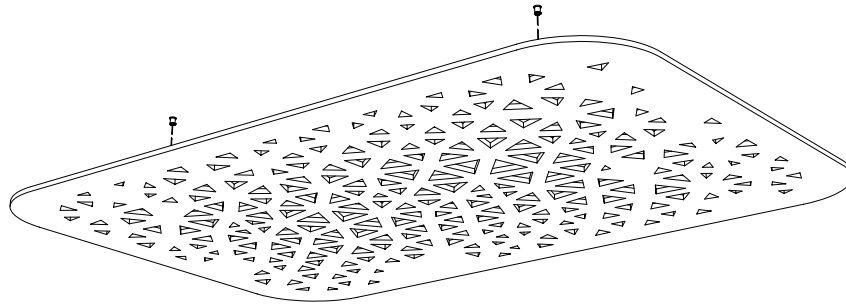

(W1800 L2400)
(W70.87" L94.49")

711.24.14.000.12 - Ceiling Panel Rectangle Bubbles

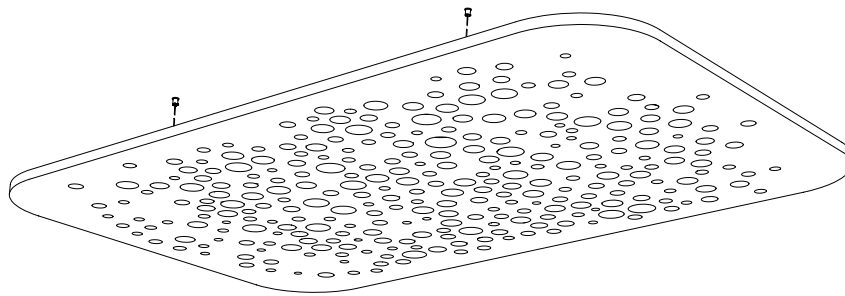


(W1800 L2400)
(W70.87" L94.49")

Web and Bubbles Rectangle Ceiling Panels

Geometry Information

Ceiling Panel Rectangle Web 711.24.14.000.10

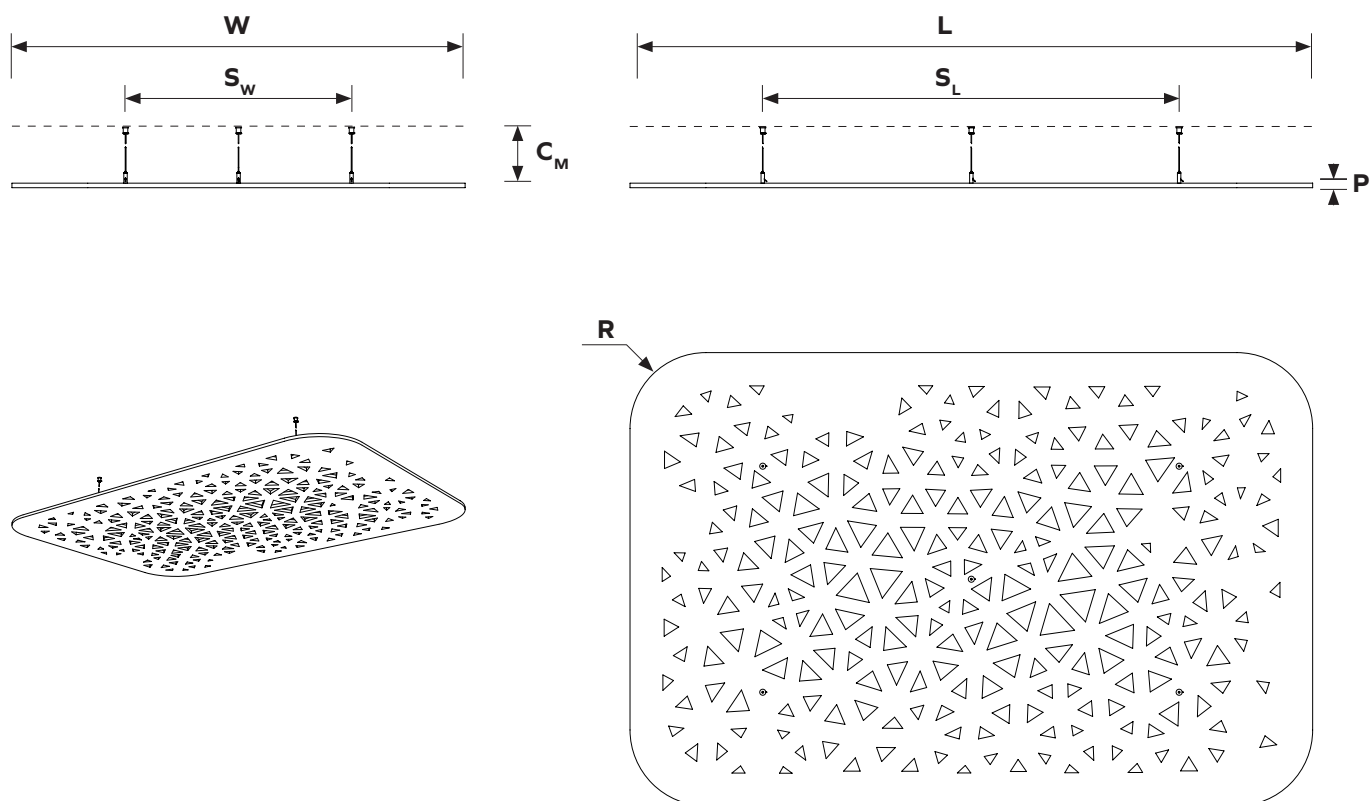

Dimensions table ¹

W	Total width	1195mm	47.05"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_W	Support spacing W	585mm	23.03"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"


Weight table ²

PET panel	7.52 kg	16.58 lbs
-----------	---------	-----------

Web and Bubbles Rectangle Ceiling Panels

Geometry Information

Ceiling Panel Rectangle Bubbles 711.24.14.000.12

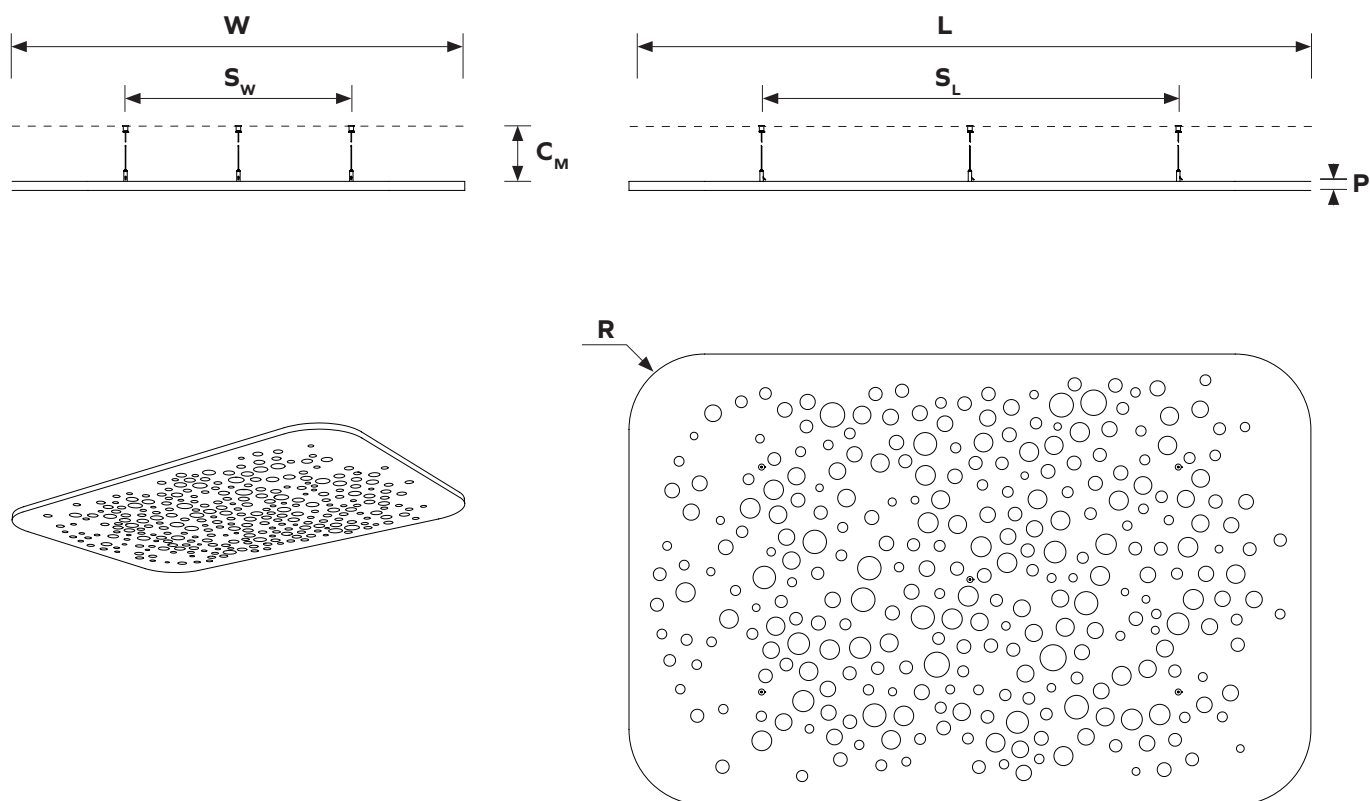

Dimensions table ¹

W	Total width	1195mm	47.05"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_W	Support spacing W	585mm	23.03"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"

Weight table ²


PET panel	6.8 kg	15.00 lbs
-----------	--------	-----------

Web and Bubbles Rectangle Ceiling Panels

Installation Overview


1 Attach mounting hardware

Measure the right spacing according to the X marks on the panel and attach mounting cables to the ceiling.

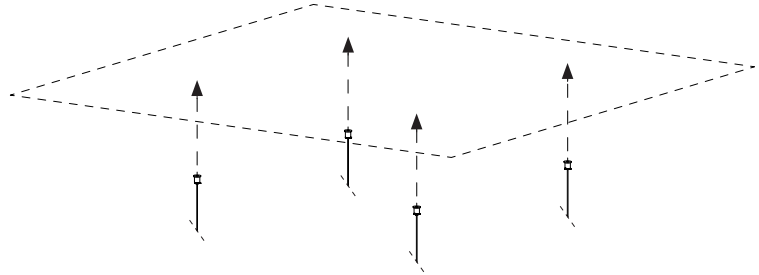



2 Attach grippers to the panel

Screw the cable grippers into the panel at the locations indicated by X mark on the panel back surface.

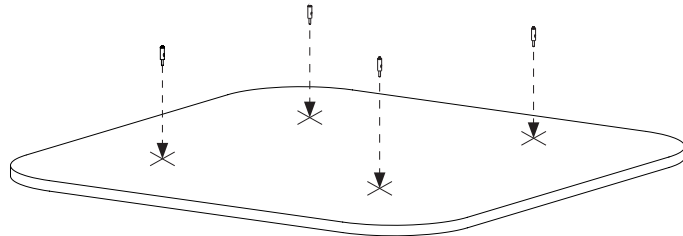


3 Connect cables

Pull suspension cables through Grippers and adjust the cable length.

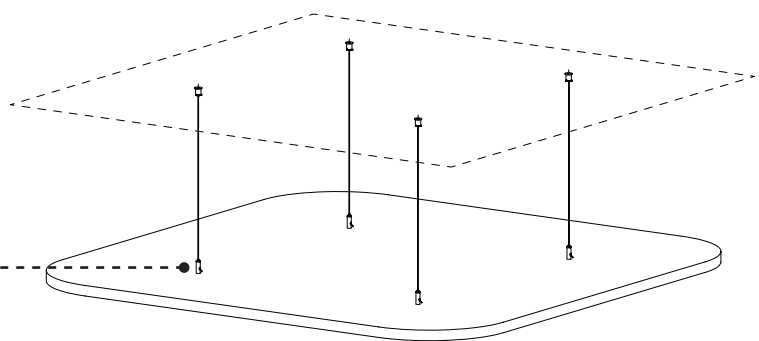

ARCHISONIC®

Colors



Name	Snow White	Milk	Cloud	Smoke	Ground	Charcoal	Slate	Raven
Color Code	500	404	103	442	108	542	444	550
NCS Code	S 0300-N	S 0502-Y	S 1002-B	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N

Name	Nordic Pine	Grove	Moss	Spearment	Ice Blue	Succulent	Deap Sea	Marine Blue
Color Code	311	317	439	706	304	712	918	864
NCS Code	S 5030-G10Y	S 7020-G30Y	S 2040-G40Y	S 1010-B90G	S 0510-B	S 3020-B30G	S 5020-R90B	S 4050-R70B

Name	Linen	Shell Pink	Jute	Warm Stone	Terracotta	Soft Coral	Honeycomb	Sunshine
Color Code	107	102	920	105	239	516	139	846
NCS Code	S 1505-Y30R	S 0510-R30B	S 3010-Y30R	S 3010-Y50R	S 4040-Y70R	S 2020-Y90R	S 2050-Y20R	S 1040-Y10R

Name	Garnet	Hot Pink	Poster Red	Electric Orange	Winter Sky	Pacific Ocean	Midnight	Grape
Color Code	724	140	662	464	311	311	810	540
NCS Code	S 5040-R10B	S 2060-R20B	S 1080-R	S 0580-Y70R	S 5030-G10Y	S 5030-G10Y	S 7020-R70B	S 5040-R40B

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colors

Experience our ARCHISONIC® Felt material with a stunning selection of 32 colors across 8 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colors harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Color fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC®

Material Specification

Product Name	Archisonic® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness¹	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic²	ASTM: NRC=0.6 ISO: αw=0.65	ASTM: NRC=0.9 ISO: αw=0.95
Density¹	2400 g/m ² (0.49 lbs/ sqft)	4000 g/m ² (0.82 lbs/sqft)
Color Fastness	Class 6 ISO 105-B02:A1	
Color	32 colors (see Archisonic® Felt Color page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Lead time³	21 days	
Fire Rating	DIN EN 13501-1: B-s1, d0	ASTM E84 Class A
VOC Emission	A+ 28 Days French Regulation	ASTM E84 Pass
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), Breeam, SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product



Climate-KIC is supported by the EIT, a body of the European Union



Climate-KIC

Declare.



Web and Bubbles Rectangle Ceiling Panels

Acoustic Performance




Testing Standards

ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

Acoustic Test Results ISO

Frequency (Hz)		125	250	500	1000	2000	4000	α_w
24mm RECTANGLE BUBBLES 1800mm x 1200mm	m²	0.4	0.9	1.5	2.3	2.9	3.2	NA
24mm RECTANGLE WEB 1800mm x 1200mm	m²	0.5	1.0	1.6	2.5	3.1	3.4	NA

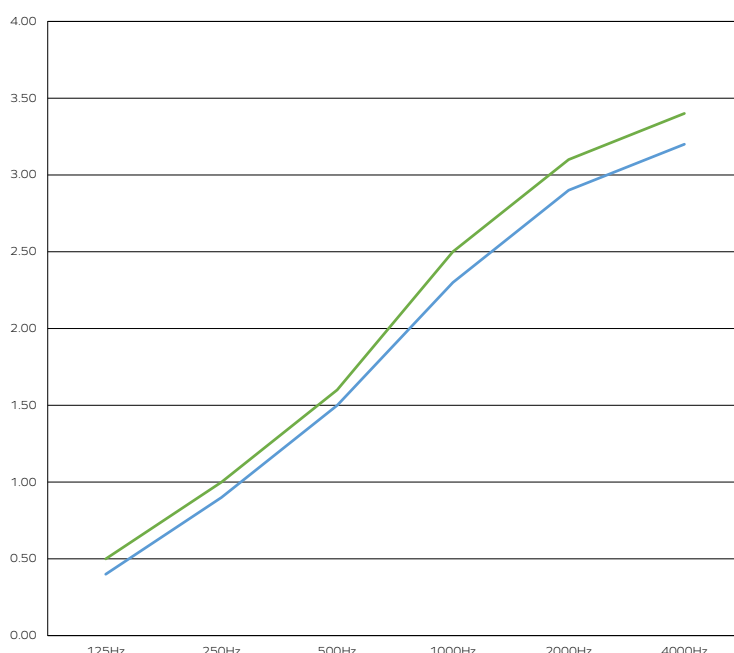

The graph represents the sound absorption coefficients (α_s) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.


Acoustic Test Results ASTM

	NRC
24mm RECTANGLE BUBBLES 1800mm x 1200mm	0.55
24mm RECTANGLE WEB 1800mm x 1200mm	0.55

- 24mm RECTANGLE BUBBLES 1800mm x 1200mm
- 24mm RECTANGLE WEB 1800mm x 1200mm

Ceiling Panels

Reference Projects

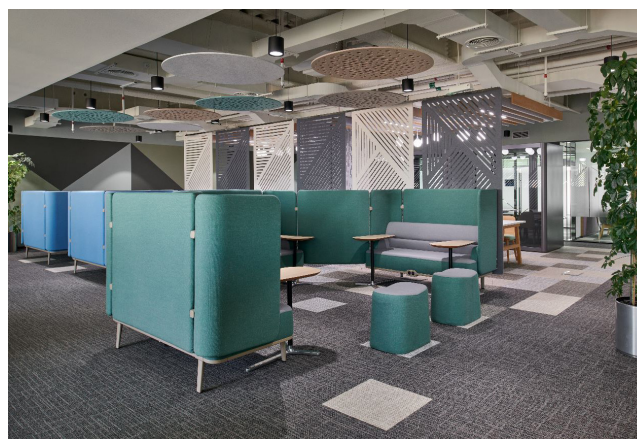

Web and Bubbles Rectangle Ceiling Panels

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and
Installation Guide



Color families



Instruction
videos



Associated
products specs.

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.



Contact our
consultant

Quote¹

48h



Order Confirmation

Production¹

14-21 days



Dispatch

Transit

location based



Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.




+41 41 566 55 55



connect@impactacoustic.com



Online form

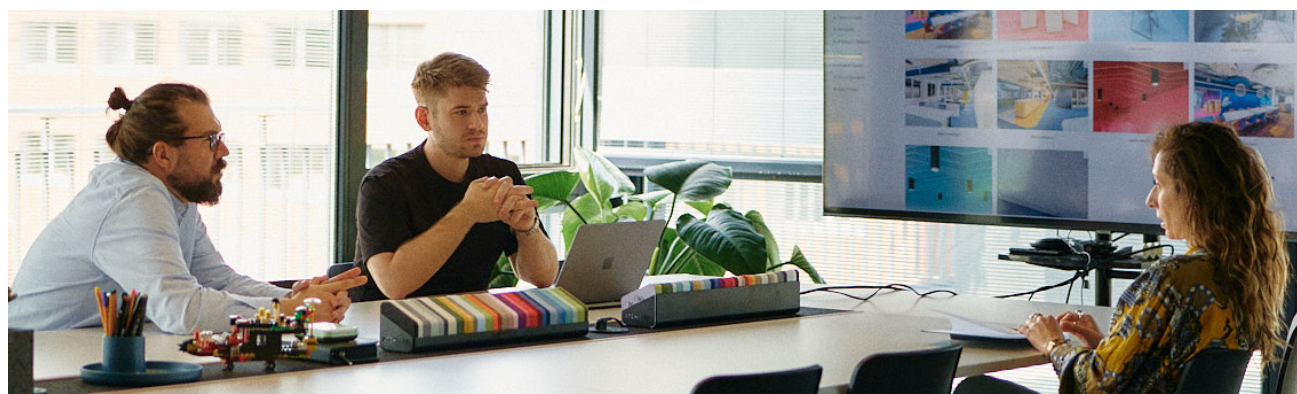

¹ - Quote and Production times may vary.

IMPACT ACOUSTIC®
Ceiling Panels Special rev.01 - 11.08.23

(Switzerland)
(USA)
(Philippines)

connect@impactacoustic.com
usa@impactacoustic.com
philippines@impactacoustic.com

(+41) 41 566 55 55
(+1) 646 918 1581
(+63) 285 80 02 50

#WeMakeAnImpact

**#We
Make An
Impact**

connect@impactacoustic.com | www.impactacoustic.com