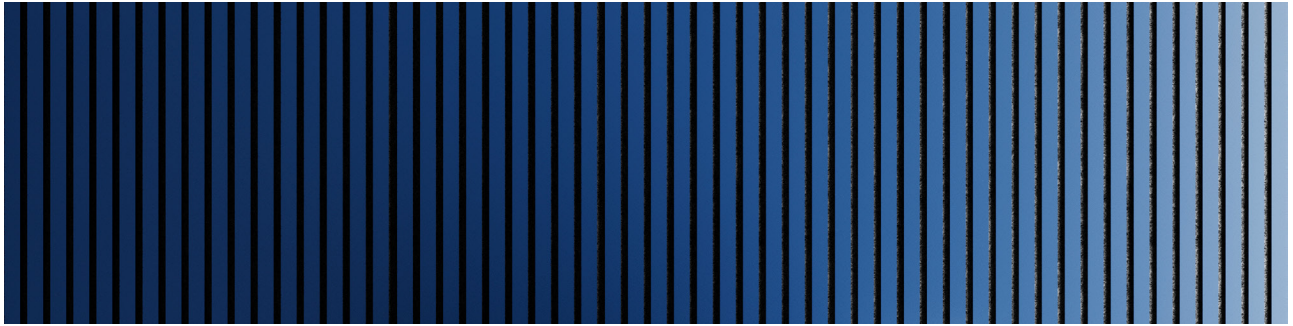


ECOnordik Colour

ECO cert | Acoustic design.





Sound-absorbing panel composed of a 9 mm thick base panel made of ECOcero ECO line recycled polyester fiber, model ECONordik Colour non-fireproof, with dimensions of 2340 x 585 mm, 19 mm thickness, and MDF slats with melamine finish measuring 27 x 10 mm in section and 12 mm spacing. Includes ECOcero adhesive fixing system for direct attachment to vertical support with backing. For horizontal installation without backing, mechanical fixing with screws is required. Available lacquered in RAL or NCS colors and 16 base colors for the ECO range panel. CE marked, ECO range panel Euroclass B-s1, d0 fire reaction. MDF Euroclass D-s2, d0 fire reaction. Compliance with low VOC emissions specifications. GOLD certification in LEED and BREEAM, FSC STANDARD, GLOBAL RECYCLED STANDARD, PEFC (ST 2002:2013), CARB2, and OEKO-TEX STANDARD 100.

Composition	Laminated MDF slats + Recycled polyester fiber
Maximum dimension	2340x585 mm.
Thickness	19 mm (ECO line 9 mm + MDF 10 mm + Melamine laminate)
Weight	7,1 kg
Surface density	7,5 kg/m ²
Absorption with 200 mm chamber	ISO: $\alpha_w=0,85$. ASTM: NRC=0,80
Fire resistance	ECO line panel: Euroclass B-s1, d0 MDF: Euroclass D-s2, d0
Thickness tolerance	± 1 mm
Cutting tolerance	± 2 mm
Installation	No construction, easy and quick / Fixed with adhesive supplied by ECOcero
Cleaning	For surface cleaning, it is recommended to spray an alcoholic solution (75%). In case of dust or lint, use a duster or vacuum cleaner. For heavy soiling, treat the material with hydrogen peroxide. Do not rub.

ECO line certificates (PET)



LEED® Certificate (Pass)



BREEAM® Certificate (Exemplary level)



Green Building Council USGBC



Antifungal Certificate



VOCs Certificate (A+ classification)



Acoustic Absorption Certification



CE Certified (EN 15102:2007 + A1:2011)



GLOBAL RECYCLED STANDARD Certificate
(Minimum 60% Post-consumer)



OEKO-TEX STANDARD 100 Certificate



Recycled Content Certification



FSC STANDARD for Chain of Custody Certification






PEFC Certificate (ST 2002:2013)




CARB2 Certificate



Base colors

				
Dark Blue	Dark Green	Blue Green	Turquoise	N
ECO-116	ECO-139	ECO-124	ECO-140	C
NCS: S 6030-R80B	NCS: S 8010-B30G	NCS: S 3050-B20G	NCS: S 4020-B70G	NCS

N: Name
C: Color code
NCS: NCS code

		
Terracotta	Coral Pink	N
ECO-108	ECO-131	C
NCS: S 4030-Y90R	NCS: S 1030-Y80R	NCS

				
Turmeric Yellow	Dark Camel	Light Camel	Opera	N
ECO-149	ECO-112	ECO-101	ECO-107	C
NCS: S 2040Y-10R	NCS: S 3010-Y50R	NCS: S 1002-Y50R	NCS: S 1505-Y40R	NCS

						
Black	Anthracite Grey	Moon Grey	Cloudy Grey	Urban Grey	Polar White	N
ECO-127	ECO-125	ECO-123	ECO-138	ECO-136	ECO-104	C
NCS: S 9000-N	NCS: S 6502-B	NCS: S 6005-R80B	NCS: S 3000-N	NCS: S 2005-R80B	NCS: S 0502-B50G	NCS

Beyond the 16 colors of the ECO range, with its soft pastel tones designed to evoke emotions, we offer custom paint in any color from the RAL and NCS palettes. Our special paint ensures perfect absorption and acoustic conditioning.

Get inspired:





