


AUX R32 – C-Series - AFEB09HP230V1C

Job Name _____
 Purchaser _____
 Submitted to _____
 Unit Designation _____

Location _____ Date _____
 Engineer _____
 For ☐Reference ☐Approval ☐Construction
 Schedule # _____



❖ AHRI No: 214290014

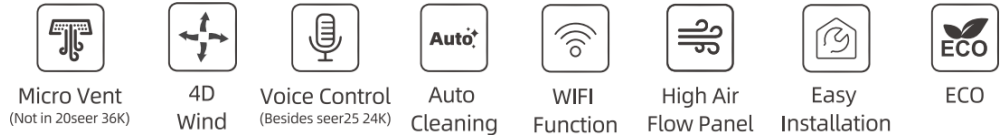

Specifications				
Model				AFEB09HP230V1C
Indoor Unit				AFEB09HP230V1CH
Outdoor Unit				AFEB09HP230V1CO
Cooling	Capacity	Rated	Btu/h	9100
	Capacity Range	Min-Max	Btu/h	1700~12600
	Power Input	Rated	W	700
	Operating Range	°F		5-125
Heating	Capacity at 47F	Rated	Btu/h	10000
	Capacity Range	Min-Max	Btu/h	1700~15000
	Power Input at 47F	Rated	W	760
	Capacity at 17F	Rated	Btu/h	10000
	Capacity at 5F	Max	Btu/h	9300
	Capacity at -5°F	Max	Btu/h	6100
	Operating Range	°F		-13-75
Efficiency	SEER2			23
	HSPF2			9.5
Indoor Unit	Air Flow Rate(SH/H/M/L/Q)		CFM	355/315/282/255/180
	Sound Pressure Level	Cooling	dB(A)	41/36/34/31/26
		Heating	dB(A)	41/36/33/29
	Package Dimensions	H	In.[mm]	11-13/16 [300]
		W	In.[mm]	32-7/8 [835]
		D	In.[mm]	14-39/64 [371]
	Net Dimensions	H	In.[mm]	8-27/64 [214]
		W	In.[mm]	30-15/32 [774]
		D	In.[mm]	11-13/16 [300]



	Net Weight	lbs[kg]		17.7 [8]
Outdoor Unit	Package Dimensions	H	In.[mm]	23-27164 [595]
		W	In.[mm]	32-31/64 [825]
		D	In.[mm]	13-37/64 [345]
	Net Dimensions	H	In.[mm]	21-3/16 [538]
		W	In.[mm]	31-11/16 [805]
		D	In.[mm]	12-11/64 [309]
	Net Weight	lbs[kg]		59.5 [27]
	Sound Pressure Level	Cooling	dB(A)	51
Heating		dB(A)	51	
Piping	Diameter	Gas(0.D.)	In.[mm]	3/8 [9.52]
		Liquid(0.D)	In.[mm]	1/4 [6.35]
		Indoor Drain	In.[mm]	5/8 [15.88]
	Min.Length	ft [m]		9 [2.74]
	Max.Length	ft [m]		65 [20]
	Max.Height	ft [m]		50 [15]
Electrical	Outdoor-Indoor	V,ph,Hz		208/230,1,60
	Recommended Breaker Size	A		15
	MCA	A		10
	MOCP	A		15
Refrigerant	Refrigerant Type			R32
	Pre-Charge Amount oz			25.4
	Additional Charge Per Foot over 25ft			0.172oz/ft

Remarks:


- 1.All specifications are subject to change by the manufacturer without prior notice.
- 2.All units are being tested and comply to ISO5151.
- 3.Sound pressure levels are measured in anechoic chamber.
During actual operation, sound pressure level will be higher as a result of room specification condition.
- 4.Data from AUX lab,05/03/24, Data may change according to test surroundings, AUX reserves right of explanation on data.





Dimensions

Indoor Unit:
AFE09HP230V1CH

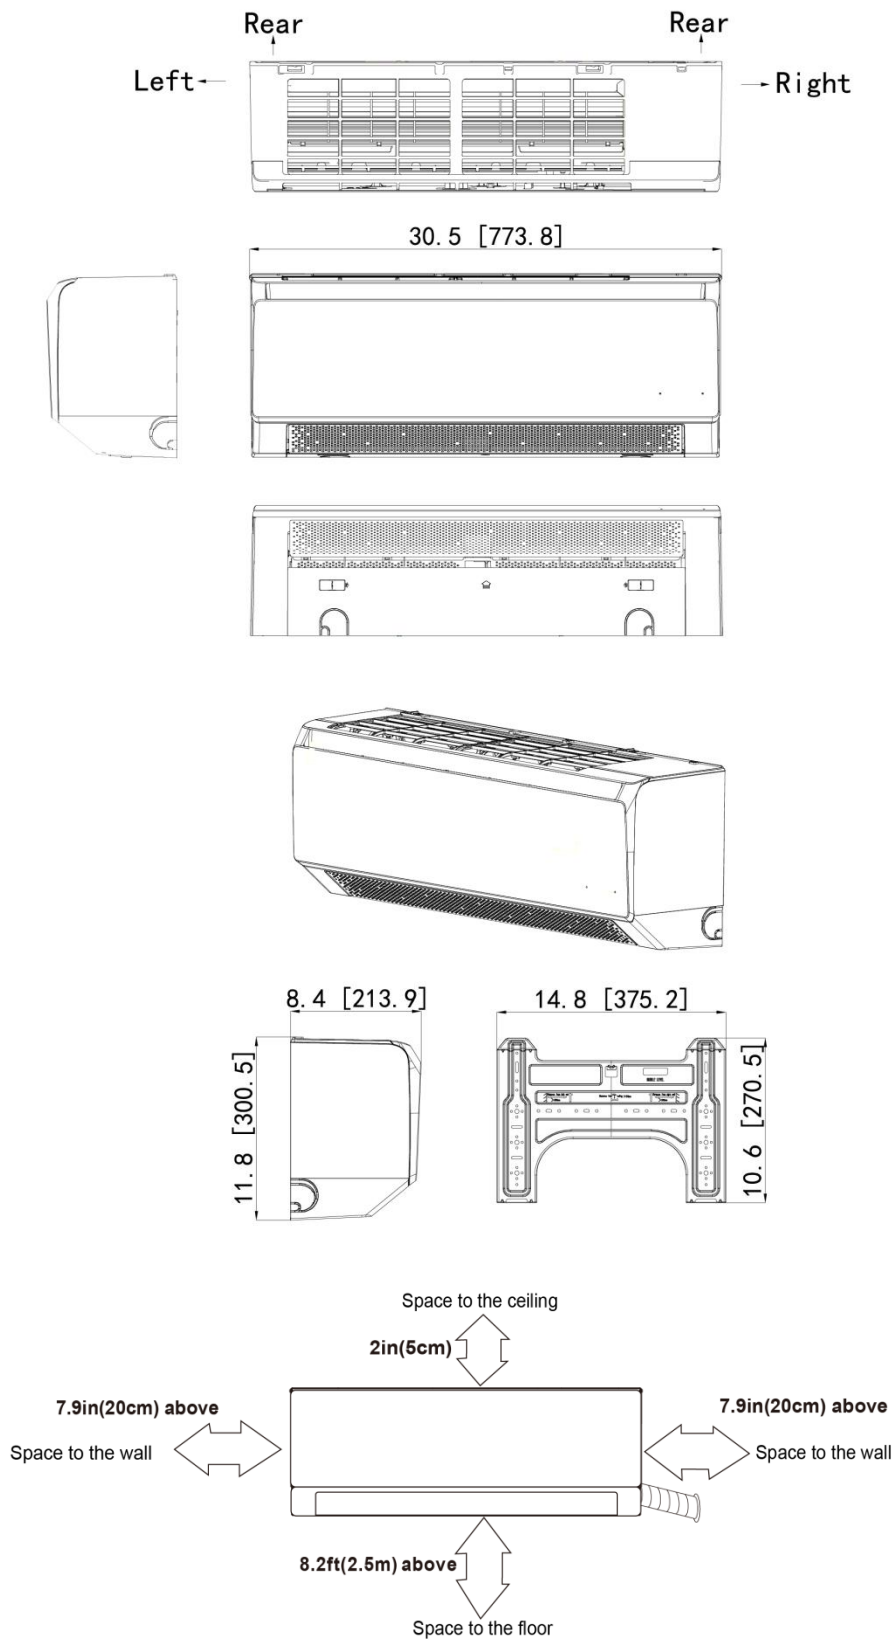




Dimensions

Outdoor Unit:

AFEB09HP230V1CO

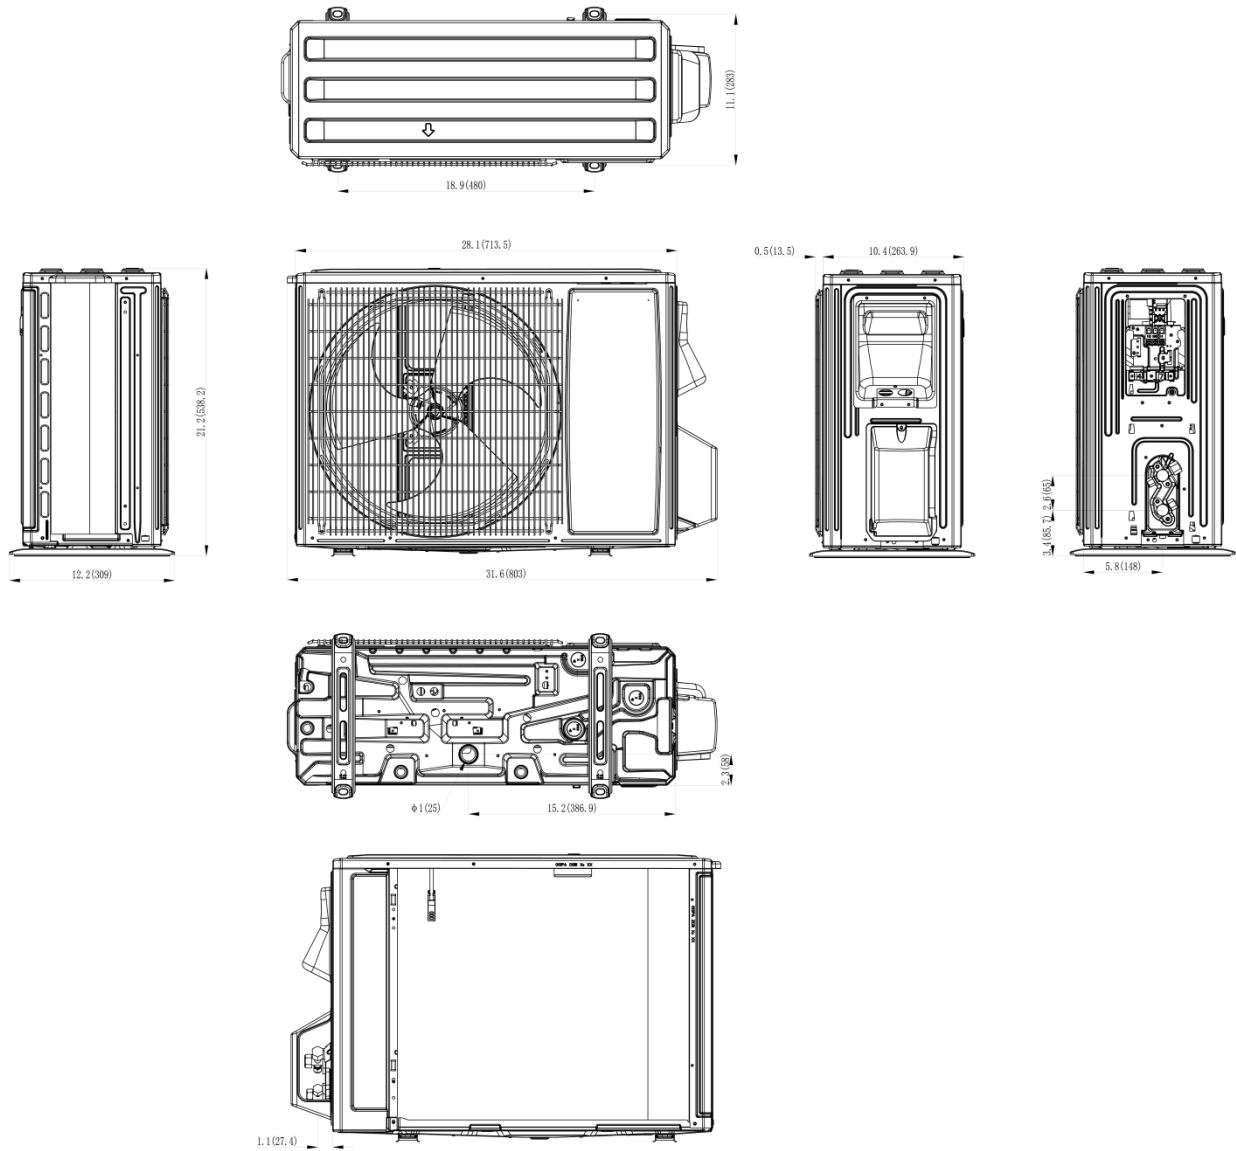



Clearances

Outdoor Unit:

AFE09HP230V1CO

