

SUBMITTAL DATA SHEET

AUX R32 - C-Series - AFEB12HP115V1C

Job Name	Location	Date	
Purchaser	Engineer		
Submitted to	For <u>Reference</u>	□Approval □Construction	
Unit Designation	Schedule #		



AHRI No: 214290019



Micro Vent



Wind



Voice Control

(Besides seer25 24K)











(Not in 20seer 36K)

Cleaning

WIFI Function

High Air Flow Panel

Easy Installation

ECO

Specifications							
	AFEB12HP115V1C						
	Indoor Unit						
	AFEB12HP115V1CO						
Cooling	Capacity	Rated	Btu/h	12000			
	Capacity Range	Min-Max	Btu/h	1700-13300			
	Power Input	Rated	W	1050			
	Operating Range	°F		5-125			
	Capacity at 47F	Rated	Btu/h	12300			
	Capacity Range	Min-Max	Btu/h	1700-15500			
	Power Input at 47F	Rated	W	950			
Heating	Capacity at 17F	Rated	Btu/h	10600			
	Capacity at 5F	Max	Btu/h	9200			
	Capacity at -5°F	Max	Btu/h	6300			
	Operating Range °F			-13-75			
Efficiency	SEER2			22			
Efficiency	HSPF2			9.5			
Indoor Unit	Air Flow Rate(SH/H/M/L/Q)		CFM	380/330/302/273/193			
	Sound Pressure	Cooling	dB(A)	43/40/36/33/27			
	Level	Heating	dB(A)	43/40/36/33			
	Package	Н	In.[mm]	11-13/16 [300]			
	Dimensions	W	In.[mm]	35-15/64 [895]			
	Difficulations	D	In.[mm]	14-39/64 [371]			
	Net Dimensions	н	In.[mm]	8-27/64 [214]			
		W	In.[mm]	32-53/64 [834]			
		D	In.[mm]	11-13/16 [300]			



	Net Weight	lbs[kg]		18.8 [8.5]
Outdoor Unit	Dankana	Н	In.[mm]	23-27/64 [595]
	Package — Dimensions —	W	In.[mm]	32-31/64 [825]
	Dimensions	D	In.[mm]	13-37/64 [345]
		Н	In.[mm]	21-3/16 [538]
	Net Dimensions	W	In.[mm]	31-11/16 [805]
		D	In.[mm]	12-11/64 [309]
	Net Weight	lbs[kg]		56.2 [25.5]
	Sound Pressure	Cooling	dB(A)	52
	Level	Heating	dB(A)	52
		Gas(0.D.)	In.[mm]	3/8 [9.52]
Piping	Diameter	Liquid(0.D)	In.[mm]	1/4 [6.35]
		Indoor Drain	In.[mm]	5/8 [15.88]
	Min.Length	ft [m]		9 [2.74]
	Max.Length	ft [m]		65 [20]
	Max.Height	ft [m]		50 [15]
Electrical	Outdoor-Indoor	V,ph,Hz		115,1,60
	Recommended	А		25
	Breaker Size			25
	MCA	А		15
	MOCP	MOCP A		25
Refrigerant	Refrigerant Type		R32	
	Pre-Charge Amount OZ			30
		Additional Charge Per Foot over 25ft		

Remarks:

- 1.All specifications are subject to change by the manufacturer without prior notice.
- 2.All units are being tested and comply to ISO5151.
- 3. Sound pressure levels are measured in anechoic chamber.

 During actual operation, sound pressure level will be higher as a result of room specification condition.
- 4.Data from AUX lab,05/03/24, Data may change according to test surroundings, AUX reserves right of explanation on data.












Dimensions


Indoor Unit: AFEB12HP115V1CH

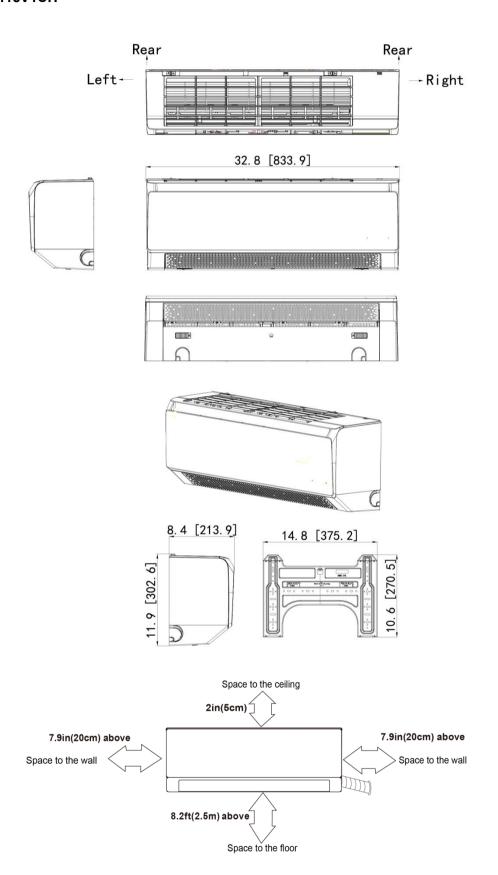





Dimensions


Outdoor Unit: AFEB12HP115V1CO

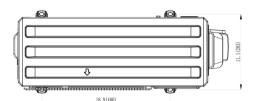













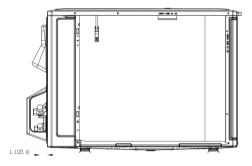



Clearances

Outdoor Unit: AFEB12HP115V1CO

