



PRODUCTS CATALOGUE

Manual Applicator



MADE IN ITALY



MANUAL


SEMI-PROFESSIONAL AND PROFESSIONAL

Semi-professional and professional applicators for extruding medium/high viscosity silicones and sealants, in standard cartridges.


Our manuals are composed of high quality materials, giving the item HIGH RESISTANCE to any use and at the same time EXTREME LIGHTWEIGHT and fully complying with European legal and ecological regulations, in order to guarantee not only high professional quality standards, but also total respect for the environment as well as absolute safety in the workplace.

Furthermore, tests carried out on each individual part guarantee maximum reliability and durability.


Legenda packaging




Neutral packaging PAP20 with generic label



Neutral packaging PAP20, with customized label




Customized packaging PAP20, with layout with your logo




Customized packaging PAP20 with P.M.T. layout




Product weight



Multiple Packaging PAP20



PE-LD04 bag, with generic label



PE-LD04 bag, with customized label



Plastic case PE-HD2 customized with logo P.M.T.



Plastic case PE-HD2 customizable through process of laser etching or label

1-components Manual Applicators



CD P

Skeleton-type' applicator, for low-viscosity sealants and silicones, in cartridges.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060080
Net weight	470 g.
Clutch	Steel - one piece
Push Rod	Hexagonal section
Max. Force	150 Kgf - 1,5 kN
Thrust ratio	10:1
Progress/Stroke	12 mm

PACKAGING

Multiple packing			
	36x20x30 cm	20 pz	9,8 Kg



CD T

Skeleton-type' applicator, for medium/low viscosity sealants and silicones, in cartridge. Hardened steel clutch and rod for greater wear resistance.


MANUAL

1060061
490 g.
Tempered - one piece
Hexagonal section
200 Kgf - 1,96 kN
10:1
12 mm

PACKAGING

Multiple packing			
	36x20x30 cm	20 pz	10,20 Kg

CARTRIDGE



1-components Manual Applicators



CD C


Manual metal gun for silicones in 310 ml cartridges rack.

WAY OF EXTRUSION	MANUAL
ART. CODE.	1060121
Net weight	567 g.
Push Rod	Rack
Max. Force	120 Kgf - 1,2 kN
Thrust ratio	10:1
Progress/Stroke	12 mm

PACKAGING

Multiple packing			
	46,5x36x19 cm	20 pz	12 Kg

CARTRIDGE

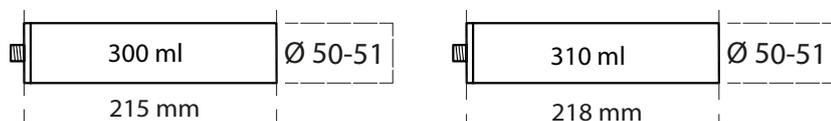

1-components Manual Applicators



PS 151


Semi-professional applicator with aluminum body, rotating cradle, lever in pressed steel and ergonomic handle. For sealants and adhesives to medium/low viscosity in standard cartridge. Designed for optimum performance while maintaining good value for money.

WAY OF EXTRUSION	MANUAL
ART. CODE.	1060318
Net weight	750 g.
Push Rod	Tempered two pieces
Max. Force	350 Kg - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm

PACKAGING

Multiple packing			
	39x24,5x40 cm	20 pz	16 Kg

CARTRIDGE

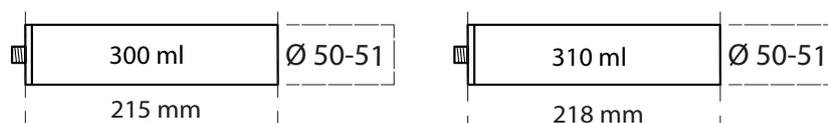

1-components Manual Applicators



PS 301

Professional applicator with aluminum body, stamped steel lever. PVC-coated handle, rod release button and retractable rod. For sealants and adhesives to medium/high viscosity in standard cartridge.

PS 301 MD

Professional applicator with aluminum body, stamped steel lever. PVC-coated handle, rod release button and retractable rod. For sealants and adhesives to high viscosity in standard cartridge.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060406 red 1060343 black
Net weight	810 g.
Clutch Push Rod	Tempered - one piece High carbon steel
Max. Force	350 Kgf - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
PVC Soft-touch	4 point black or red
Features	Cradle steel rotating, electrowelded

MANUAL
1060528
846 g.
Tempered - one piece High carbon steel
450 Kgf - 4,4 kN
24:1
3,5 mm
4 point grey
Cradle steel rotating, electrowelded


PACKAGING

Multiple packing			
	45x29x36 cm	20 pz	17,10 Kg

PACKAGING

Multiple packing			
	45x29x36 cm	20 pz	17,10 Kg

CARTRIDGE



1-components Manual Applicators



PS 250 T L

Professional applicator with transparent tube for extrusion control of the product in use. For the use of medium/high viscosity silicones and sealants, in standard cartridges.



IN ADDITION OPTIONAL
(for products in 300/400 ml soft pack)

- **Piston** cod. 3080076
- **Cone** cod. 3080077


WAY OF EXTRUSION	MANUAL
ART. CODE	1060418
Net weight	851 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	350 KgF - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
Tube	in PET transparent
Ring nuts	Plastic

PACKAGING


Multiple packing			
	54x24x29 cm	10 pz	9,20 Kg

OPTIONAL ACCESSORIES (for products in 300/400 ml soft-pack)	
Piston	3080076
Cone	3080077

CARTRIDGE

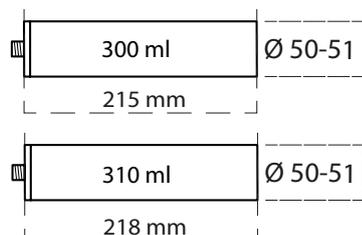

SOFT-PACK

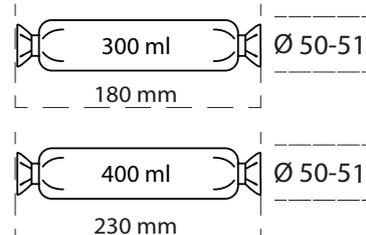

1-components Manual Applicators



PS 265

Professional applicator with aluminum body, stamped steel lever.

PVC-coated handle, rod release button and retractable rod.


For use with medium/high viscosity silicones and sealants, in standard cartridges and soft-pack.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060050 black 1060054 red
Net weight	1.083 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
PVC Soft-touch	4 point black or red
Tube and ring nuts	Aluminum

PACKAGING

Multiple packing			
	58x33x24 cm	12 pz	14,1 Kg

CARTRIDGE

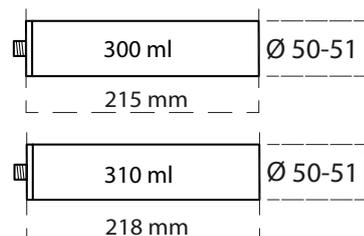

PS 265 MD

Professional applicator with aluminum body, stamped steel lever.

PVC-coated handle, rod release button and retractable rod.

For use with high viscosity silicones and sealants, in standard cartridges and soft-pack.


MANUAL

1060xxx
1.182 g.
Tempered - one piece
High carbon steel
450 Kgf - 4,4 kN
24:1
3,5 mm
4 point grey
Aluminum

PACKAGING

Multiple packing			
	58x33x24 cm	12 pz	15,3 Kg

SOFT-PACK

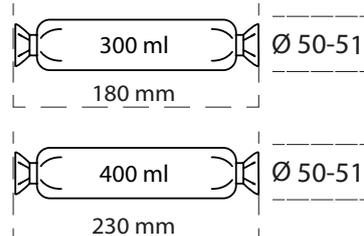

1-components Manual Applicators



PS 265 T

Professional applicator with aluminum body, stamped steel lever. PVC-coated handle, rod release button and retractable rod. For use with medium/high viscosity silicones and sealants, in standard cartridges and soft-pack.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060394 black 1060212 red
Net weight	995 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
PVC Soft-touch	4 point black or red
Tube and ring nuts	PET tube and aluminum ring nuts

PACKAGING

Multiple packing			
	58x33x24 cm	12 pz	13 Kg



PS 395 T





Professional applicator with aluminum body, stamped steel lever. PVC-coated handle, rod release button and retractable rod. For use with medium/high viscosity silicones and sealants, in standard cartridges and soft-pack.

MANUAL

ART. CODE	1060217 black 1060196 red
Net weight	1.061 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
PVC Soft-touch	4 point black or red
Tube and ring nuts	PET tube and aluminum ring nuts

PACKAGING

Multiple packing			
	67x34x25 cm	12 pz	15 Kg



1-components Manual Applicators



PS 395


Professional applicator with aluminum body, pressed steel lever and with ergonomic grip coated with PVC.
For use with medium/high viscosity silicones and sealants, in standard cartridges and soft-pack.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060051 black - 1060055 red
Net weight	1.217 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
PVC Soft-touch	4 point black or red
Tube and ring nuts	Aluminum

PACKAGING

Multiple packing			
	67x34x25 cm	12 pz	15 Kg

CARTRIDGE



PS 395 MD

Professional applicator with aluminum body, pressed steel lever and with ergonomic grip coated with PVC.
For use with high viscosity silicones and sealants, in standard cartridges and soft-pack.


MANUAL

ART. CODE	1060527
Net weight	1.300 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	4 point grey
Tube and ring nuts	Aluminum

PACKAGING

Multiple packing			
	67x34x25 cm	12 pz	16,5 Kg

SOFT-PACK



2-components Manual Applicators






CTX 300 MD

Professional applicator with aluminum body, pressed steel lever.
 PVC-coated handle, rod release button.
 Rod release button and die-cast aluminum retract rod knob.
 For use high viscosity products and chemical anchor, in 300 ml coaxial cartridge.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060242
Net weight	1.038 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black

PACKAGING

Multiple packing			
	51x32,5x32 cm	20 pz	21,8 Kg



COAXIAL



CTX 400 MD


Professional applicator with aluminum body, pressed steel lever.
 PVC-coated handle, rod release button.
 Rod release button and die-cast aluminum retract rod knob.
 For use high viscosity products and chemical anchor, in 400 ml coaxial cartridge.

MANUAL

1060220 black 1060221 red
1.182 g.
Tempered - one piece
High carbon steel
450 Kgf - 4,4 kN
24:1
3,5 mm
3 point black or red

PACKAGING

Multiple packing			
	39x34x25 cm	10 pz	12,7 Kg



COAXIAL

2-components Manual Applicators



BCX 345 MD

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
Plastic clips on the cradle to position the cartridge properly.
For the use of glues and chemical anchors in side-by-side two-component cartridges.





BCX 385 MD

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
Plastic clips on the cradle to position the cartridge properly.
For the use of glues and chemical anchors in side-by-side two-component cartridges.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060222 black 1060223 red
Net weight	1.196 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black or red

PACKAGING

Multiple packing			
	50x34x17 cm	8 pz	10,4 Kg

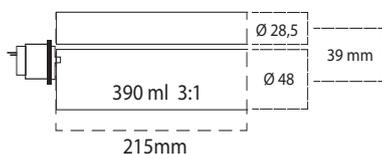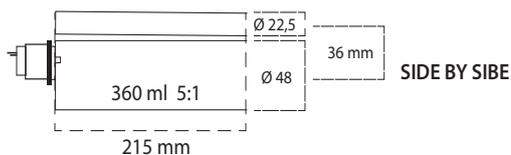


MANUAL

1060237
1.425 g.
Tempered - one piece
High carbon steel
450 Kgf - 4,4 kN
24:1
3,5 mm
3 point black

PACKAGING

Multiple packing			
	47x45x25,5 cm	10 pz	15,3 Kg

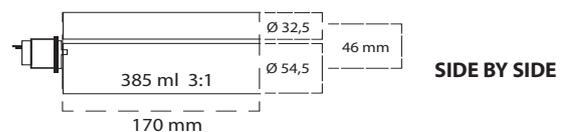

2-components Manual Applicators



BCX 585 MD

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
Plastic clips on the cradle to position the cartridge properly.
For the use of glues and chemical anchors in side-by-side two-component cartridges.




BCX 825 MD

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
Plastic clips on the cradle to position the cartridge properly.
For the use of glues and chemical anchors in side-by-side two-component cartridges.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060241 black 1060240 red
Net weight	1.566 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black or red

PACKAGING

Multiple packing			
	53x45x25 cm	8 pz	10,4 Kg

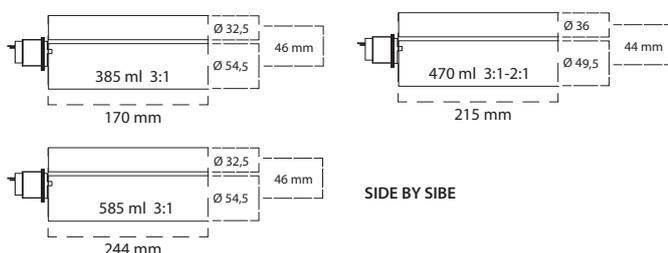


MANUAL

1060313 black 1060314 red
1.687 g.
Tempered - one piece
High carbon steel
450 Kgf - 4,4 kN
24:1
3,5 mm
3 point black or red

PACKAGING

Multiple packing			
	53x51x27 cm	10 pz	15,3 Kg

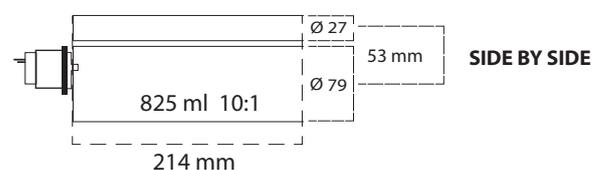

2-components Manual Applicators



BCX 101

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
For use of **Polyurethane foam** in two-component side by side cartridges.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060070
Net weight	988 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43 kN
Thrust ratio	18:1
Progress/Stroke	4,5 mm
PVC Soft-touch	3 point black

PACKAGING

Multiple packing			
	41x31x20 cm	6 pz	6,6 Kg



BCX 180


Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
For the use of medium/high viscosity glues and sealants, in two-component side by side cartridges.

MANUAL

1060307
970 g.
Tempered - one piece
High carbon steel
350 Kgf - 3,43 kN
14:1
8 mm
3 point black

PACKAGING

Multiple packing			
	41x31x18 cm	8 pz	8,63 Kg

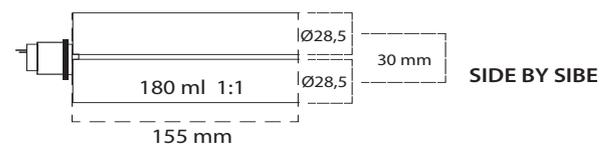

2-components Manual Applicators



BCX 221 MD

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
For the use of medium/high viscosity glues and sealants, in two-component side by side cartridges.



WAY OF EXTRUSION

MANUAL

ART. CODE	1060208
Net weight	1.078 g.
Clutch	Tempered - two piece
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black

PACKAGING

Multiple packing			
	28x28x36 cm	6 pz	7 Kg

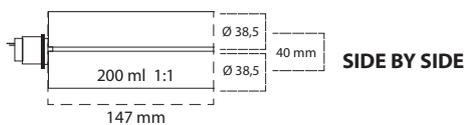

BCX 251 MD


Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
For the use of medium/high viscosity glues and sealants, in two-component side by side cartridges.

MANUAL

ART. CODE	1060482
Net weight	1.295 g.
Clutch	Tempered - two piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black

PACKAGING

Multiple packing			
	54x36x26 cm	10 pz	13 Kg

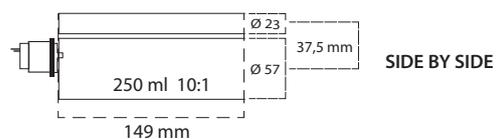

2-components Manual Applicators



Piston kits included
in the packaging for
1:1 cartridges





BCX 400 MD

Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
For the use of medium/high viscosity glues and sealants, in two-component side by side cartridges.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060483
Net weight	988 g.
Clutch	Tempered - two piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black

PACKAGING

Multiple packing			
	40x31x31 cm	10 pz	16,5 Kg

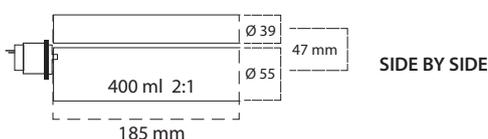

BCX 490 MD


Professional applicator with aluminum body.
Die-cast steel lever.
PVC-coated handle and rod release button.
Rod release button and die-cast aluminum retract rod knob.
For the use of glues and chemical anchors in side-by-side two-component cartridges.

MANUAL

1060510
1.615 g.
Tempered - one piece
High carbon steel
450 Kgf - 4,4 kN
24:1
3,5 mm
3 point black

PACKAGING

Single packing			
	23x37x13 cm	1 pz	1,8 Kg
Multiple packing			
	54x36x26 cm	10 pz	16,4 Kg

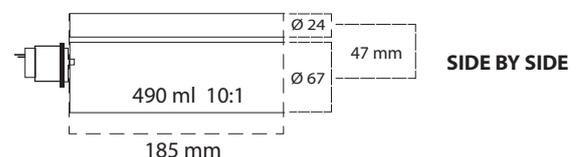

2-components Manual Applicators



BCX 600 MD

Professional applicator with aluminum body.

Die-cast steel lever.

PVC-coated handle and rod release button.

Rod release button and die-cast aluminum retract rod knob.

For the use of medium/high viscosity glues and sealants, in two-component side by side cartridges.


WAY OF EXTRUSION

MANUAL

ART. CODE	1060270
Net weight	1521 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Max. Force	450 Kgf - 4,4 kN
Thrust ratio	24:1
Progress/Stroke	3,5 mm
PVC Soft-touch	3 point black

PACKAGING

Multiple packing			
	54x36x26 cm	10 pz	16,4 Kg

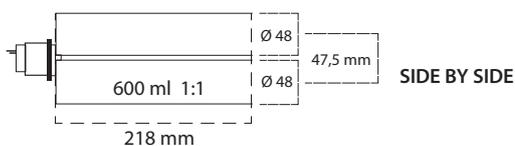

2-components Manual Applicators




M 50

Applicator for the extrusion of the adhesives contained in the standard 50 ml two-component cartridges.

WAY OF EXTRUSION	MANUALE
ART. CODE	1060444
Net weight	223 g.
Material	PA6 glass-fibre reinforced
Mixing ratio	1:1 e 2:1
Interaxial spacing	22,30 mm



PACKAGING

Multiple packing			
	57x40x37 cm	50 px	12,3 Kg



RECTANGULAR CARTRIDGE BASE

SIDE BY SIDE




**AVAILABLE ON REQUEST
50ML 10:1 AND 4:1**



ROUND CARTRIDGE BASE

SIDE BY SIDE

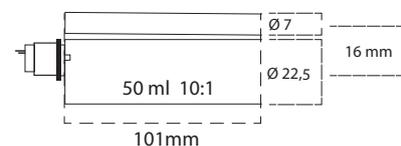

M 51

Applicator for the application and extrusion of the adhesives contained in the standard 50 ml two-component cartridges.

MANUAL

1060460
220 g.
PA6 glass-fibre reinforced
10:1
15,50 mm

PACKAGING

Multiple packing			
	57x40x37 cm	50 px	12,3 Kg

2-components Manual Applicators




BI 60

Applicator for the application and extrusion of the adhesives contained in the standard 50 ml two-component cartridges.


WAY OF EXTRUSION	MANUAL
ART. CODE	1060163
Net weight	430 g.
Material	Metal body and holder PA6 cartridge holder glass fibre reinforced
Mixing ratio	1:1
Interaxial spacing	6,5 mm

PACKAGING

Multiple packing			
	42x31x49 cm	20 px	11,3 Kg

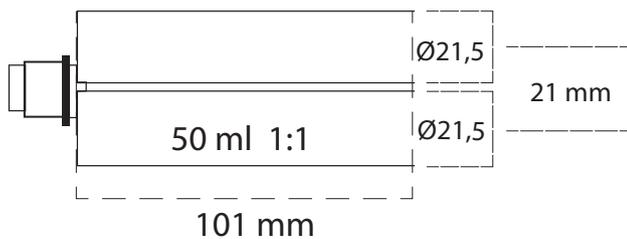

SIDE BY SIDE



RECTANGULAR
CARTRIDGE BASE

2-components Manual Applicators



BX 70

Applicator for the application and extrusion of the adhesives contained in the standard 50 ml two-component cartridges.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060235 red
Net weight	450 g.
Material	Glass-fibre reinforced PA6 body metal cartridge holder
Mixing ratio	1:1
Interaxial spacing	8 mm


PACKAGING

Multiple packing			
	36x31x30 cm	20 pz	12,6 Kg



RECTANGULAR CARTRIDGE BASE

SIDE BY SIDE

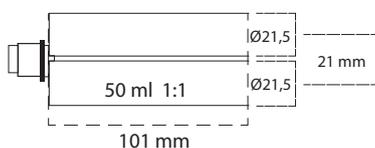

BX 71

Applicator for the application and extrusion of the adhesives contained in the standard 50 ml two-component cartridges.

MANUAL
1060523 blue
450 g.
Glass-fibre reinforced PA6 body metal cartridge holder
10:1
8 mm


PACKAGING

Multiple packing			
	36x31x30 cm	20 pz	12,6 Kg



ROUND CARTRIDGE BASE

SIDE BY SIDE

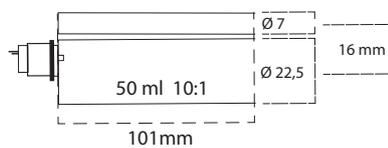

BX 72

Applicator for the application and extrusion of the adhesives contained in the standard 50 ml two-component cartridges.

MANUAL
1060435 red
450 g.
Glass-fibre reinforced PA6 body metal cartridge holder
2:1
8 mm


PACKAGING

Multiple packing			
	36x31x30 cm	20 pz	12,6 Kg



RECTANGULAR CARTRIDGE BASE

SIDE BY SIDE

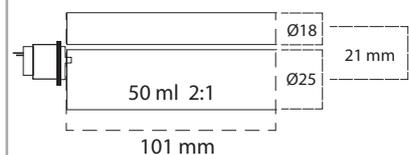

Manual Applicators



XTRA CLAMP

Professional vice with carbon steel push rod, die-cast aluminum clamps and soft rubber-coated jaws to avoid damaging surfaces.

For quick clamping of materials to be glued, fixed, drilled or sawn. It is suitable for any work where clamping or widening is required.

- Easily converted into a spreader
- Ergonomic handle for excellent grip and easy one-handed operation
- Soft rubber-coated jaws for protection of clamped materials
- Quick action for release activation

APPLICATION NR 1	CLAMPING : FOR QUICK CLAMPING OF MATERIALS TO BE GLUED, FIXING, DRILLING OR SAWING.				
APPLICATION NR 2	SPREADER : FOR ANY JOB WHERE A SPREADER IS NEEDED, ESPECIALLY USED IN JOINERY OR WINDOW AND FURNITURE ASSEMBLY.				
Main Structure	<ul style="list-style-type: none"> • carbon steel push rod • die-cast aluminum clamps • soft rubber-covered jaws 				
Max. Force	350 KgF - 3,43 kN				
Model	Length (mm)	Width (mm)	Height (mm)	Net weight (g)	ART.CODE
XTRA CLAMP 150	350	230	40	970	1060385
XTRA CLAMP 300	500	230	40	1070	1060386
XTRA CLAMP 450	652	230	40	1200	1060387
XTRA CLAMP 600	850	230	40	1305	1060388
XTRA CLAMP 900	1100	230	40	1532	1060389

PACKAGING

Multiple packing		
XTRA CLAMP 150	6 pz	6 Kg
XTRA CLAMP 300	6 pz	6,7 Kg
XTRA CLAMP 450	6 pz	7,5 Kg
XTRA CLAMP 600	6 pz	8,2 Kg
XTRA CLAMP 900	6 pz	9,6 Kg

Manual Applicators



PMS

Applicator for bulk products, specially developed for application of bulk materials such as fillers and low-viscosity cement, particularly suitable for filling joints between bricks and tiles.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060486
Net weight	1.950 g.
Thrust ratio	18:1
Push Rod	High carbon steel
Max. Force	350 Kgf - 3,43 kN
Nozzle	Two different nozzles plastic
Tube	In PVC, capacity 1 L

PACKAGING

Multiple packing			
	52x52x47 cm	10 pz	21 Kg

Manual Applicators



PMX

Applicator for loose silicones and sealants, also two-component, contained in drums.

Thanks to the suction piston and the large lever, this applicator directly sucks the product from drums of Ø 29 - 23.5 cm by means of the optional pusher discs.

The kit includes:

- Applicator with special piston
- No. 3 nozzles of different diameters 6 mm / 9 mm / 13 mm with adapter to attach to the gun.



OPTIONAL PUSHER DISCS *not included in packaging*

BIN PUSHER DISCS Ø 29 - 23.5 CM ARE REQUIRED TO SUCK BULK PRODUCT DIRECTLY FROM BINS AND LOAD THE GUN.

WAY OF EXTRUSION	MANUAL
ART. CODE	1060021
Net weight	1.297 g.
Clutch	Tempered - one piece
Push Rod	High carbon steel
Progress/Stroke	4,4 mm
Thrust ratio	18:1
Max. Force	350 Kgf - 3,43 kN
PVC Soft-touch	4 point black
Tube and ring nuts	Aluminum

OPTIONAL ACCESSORIES

Pusher Disc 29 cm	3080120
Pusher Disc 23,5 cm	3080121

PACKAGING

Multiple packing			
	54x27x39 cm	10 pz	14,2 Kg

Nozzle available for soft-pack and cartridges

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

THE ADAPTER FOR SOFT-PACK
Cod. 3080010



SOFT-PACK

NOZZLE
for soft-pack



3080036

ADAPTER
for soft-pack



1060102



Thread 15 x 1,5



Thread 15 x 2,5



ALUMINUM
CARTRIDGE

Threaded
15x1,5 mm

NOZZLES
for aluminum
cartridge

Threaded 15 x 1,5
mm



3080005



4020761



3080002



3080009

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

THE ADAPTER FOR SOFT-PACK
Cod. 3080225



PLASTIC
CARTRIDGE

Threaded
15x2,5 mm

ADAPTER
for plastic cartridge

Threaded 15 x 2,5 mm



1020054

NOZZLES
for plastic cartridge

Threaded 15 x 2,5 mm



3080003



3080188



3080189



3080190

Nozzles for the extrusion of silicone and sealants, PU foam in different lengths.



300 mm

200 mm

100 mm

Different openings available in different positions, depending on user needs and material viscosity.



ADAPTER for cartridges and soft-pack.
Also available Threaded 12x2,5 mm and 15x1,5 mm



For cartridges and soft-packs

PRIVATE LABEL

Private Label is a product PERSONALISATION service that P.M.T. offers its customers. It is possible, on request, to characterise the guns following the style of your brand, inserting your logo, name and description of the article. Many P.M.T. customers use the private label service to personalise their products.



LOGO

Private Label is a product PERSONALISATION service that P.M.T. offers its customers. It is possible, on request, to characterise the guns following the style of your brand, inserting your logo, name and description of the article. Many P.M.T. customers use the private label service to personalise their products.

COLOR

In keeping with the style of your brand, we produce individual components in the desired colour, such as the handle or metal components, for which we use special treatments such as anodising and specific paint finishes. We also select the best collaborators to ensure that your product is unique and eye-catching.



Customized laser marking upon request



Other products available



Pneumatic Applicators



Manual applicators



Cordless Applicators



Foam guns and Adhesive guns



Coating guns



Spray guns



Fittings



Service guns





P.M.T. s.r.l.

Via G. Marconi, 3/7 - Zona Artigianale Nord
24051 Antegnate (BG)
Tel. +39 0363 905025 | Fax +39 0363 905200
www.pmt.it | info@pmt.it

