



PRODUCTS CATALOGUE

Pneumatic Applicator



MADE IN ITALY

CSG SERIES


PROFESSIONAL

Professional pneumatic gun for sealants and adhesives, such as silicones, mastics, glues and others products packed in standard soft - pack (sausage shaped) or in cartridge.


P.M.T. designed and manufactured the CSG with high quality materials, bestowing the item HIGH RESISTANCE to any use and EXTREME LIGHTNESS at the same time and thoroughly complying to the legal and ecological European legislations, in order to guarantee not only high quality professional standards, but also a total respect of the surrounding environment as well as absolute safety in the work place.

In addition, the tests carried out on each single piece ensure top reliability and duration over time.


Legenda packaging




Neutral packaging PAP20 with generic label




Neutral packaging PAP20, with customized label




Customized packaging PAP20, with layout with your logo




Customized packaging PAP20 with P.M.T. layout




Product weight



Multiple Packaging PAP20



PE-LD04 bag, with generic label



PE-LD04 bag, with customized label



Plastic case PE-HD2 customized with logo P.M.T.



Plastic case PE-HD2 customizable through process of laser etching or label

GENERAL SPECIFICATIONS FOR THE SINGLE COMPONENT APPLICATOR

1. Tube, Ringnuts and the main body are machined from solid aluminium, providing high resistance over time, and an overall long durability of the tool. The new air valve ensures the maximum accuracy during dispensing operation and a life-long durability of its internal parts.
2. TUBE HOLDER produced in PA6 plastic to guarantee the lightness of the applicator. A metal hook is provided to give the possibility to hang the applicator for a less heavy use.
3. ERGONOMIC HANDLE place on the device barycentre, to ensure perfect balancing and ease of use, with a single hand too.
4. QUICK RELEASE VALVE to ensure the highest precision. Upon release of the trigger, air is instantly emitted and product extrusion immediately stopped, therefore preventing material being applied outside the desired area, dripping and imperfections during extrusion.
5. MICRO PRESSURE REGULATOR to adjust and stabilise pressure in order to guarantee constant force and speed (only for RC/NE - in all others it is already included). Pressure can be adjusted from 2 to 10 bar max.



ACCESSORIES

6. PRESSURE GAUGE to measure the air pressure and enable better extruded product adjustment.
7. "L" SHAPED SWIVEL CONNECTOR. More comfortable gun handling provided by the swivel connector, with displaceable supply pipe to user's needs.
Thanks to the Swivel connector, the tube passes over the arm, (6A) and does not disturb the part to be treated (optional).





1-components Pneumatic Applicators





RC/NE

Pneumatic applicator for the extrusion of sealant products and adhesives, packed in standard plastic cartridges.



MICRO PRESSURE REDUCER AVAILABLE ALSO
WITH A PRESSURE GAUGE
OPTIONAL NOT INCLUDED

WAY OF EXTRUSION	PNEUMATIC	PACKAGING			
ART. CODE	1020146	Multiple packing			
Net weight	350 g.		56x58x35 cm	20 pz	7 Kg
Work pressure	0-10 bar	Single packing			
Tube lenght	210 mm				
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN				
Connection	1/4 male gas				
Noise Level	<80 dBA				
OPTIONAL					
Micro Pressure reducer	3080114				
Pressure Gauge Code	1090091				



For the use of aluminum cartridges it is advisable to use the applicator CSG II 450 / CSG II 340 T.



1-components Pneumatic Applicators



CSG II 210

Professional Pneumatic applicator for the extrusion of sealants and adhesives, packed in standard plastic or aluminium cartridges.

WAY OF EXTRUSION	PNEUMATIC	PACKAGING			
ART. CODE	1020194	Multiple packing			
Net weight	867 g.		55x32x44 cm	10 pz	11,80 Kg
Work pressure	0-10 bar	Single packing			
Tube lenght	220 mm				
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN				
Connection	1/4 male gas				
Noise Level	<80 dBA				
Features	Pressure reducer integrated Dump valve integrated (dripless)				



For the use of aluminum cartridges it is advisable to use the applicator CSG II 450 / CSG II 340 T.

1-components Pneumatic Applicators



CSG II 245

Professional Pneumatic applicator for the extrusion of sealants and adhesives, packed in standard plastic or aluminium Cartridges, or soft packs.





ADAPTER FOR CARTRIDGES, INCLUDED IN THE PACKAGE

WAY OF EXTRUSION

MECHANICAL (by means of a piston) for soft-pack PNEUMATIC for Cartridges	
ART. CODE	1020184
Net weight	1.072 g.
Work pressure	0-10 bar
Tube lenght	263 mm
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)

PACKAGING

Multiple packing			
	42x49x45 cm	10 pz	16,40 Kg
Single packing			

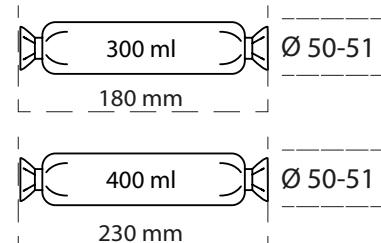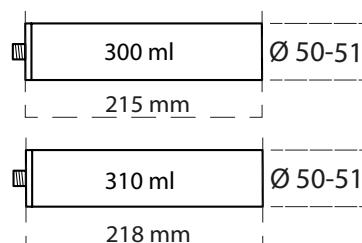

For the use of aluminum cartridges it is advisable to use the applicator CSG II 450 / CSG II 460

1-components Pneumatic Applicators





CSG II 270

Professional Pneumatic applicator for the extrusion of sealants and adhesives, packed in standard soft-packs.

WAY OF EXTRUSION	MECHANICAL (by means of a piston)
ART. CODE	1020185
Net weight	1.072 g.
Work pressure	0-10 bar
Tube lenght	263 mm
Max Force	200 Kgf (10 bar - 145 PSI)-1,961 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)

PACKAGING

Multiple packing			
	50x42x61 cm	10 pz	15,20 Kg
Single packing			

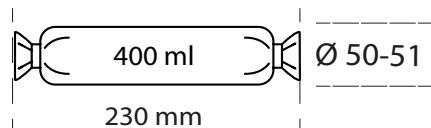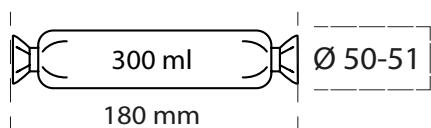

1-components Pneumatic Applicators



CSG II 370

Professional Pneumatic applicator for the extrusion of sealers and adhesives, packed in standard plastic or aluminium cartridges, or soft-packs.



ADAPTER FOR CARTRIDGES. INCLUDED IN THE PACKAGE



WAY OF EXTRUSION

MECHANICAL (by means of a piston) for soft-pack
PNEUMATIC for cartridge

ART. CODE	1020182
Net weight	1.252 g.
Work pressure	0-10 bar
Tube length	400 mm
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)

PACKAGING

Multiple packing			
	59x36x64 cm	10 pz	18,70 Kg
Single packing			

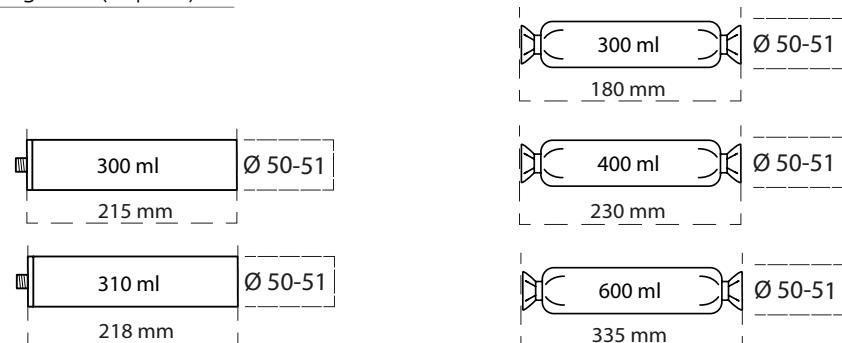

For the use of aluminum cartridges it is advisable to use the applicator CSG II 450 / CSG II 460

1-components Pneumatic Applicators




CSG II 400

Professional pneumatic applicator for the extrusion of sealers and adhesives, packed in standard soft-packs.

WAY OF EXTRUSION	MECHANICAL (by means of a piston)
ART. CODE	1020181
Net weight	1.119 g.
Work pressure	0-10 bar
Tube lenght	400 mm
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)

PACKAGING

Multiple packing			
	61x49x44 cm	10 pz	17,30 Kg
Single packing			



1-components Pneumatic Applicators



CSG II 460

Professional Pneumatic applicator for the extrusion of sealers and adhesives, packed in standard plastic or aluminium cartridges, or soft-packs.


Thanks to the push rod, the product is not in contact with air pressure.



WAY OF EXTRUSION	MECHANICAL (rod driven piston)
ART. CODE	1020501
Net weight	1.764 g.
Work pressure	0 - 10 bar
Tube length	460 mm
Max Force	200 Kgf (10 bar - 145 PSI)-1,961 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)

IMBALLAGGIO

Imballo multiplo			
	56x32x45 cm	10 pz	18,70 Kg
Imballo singolo			

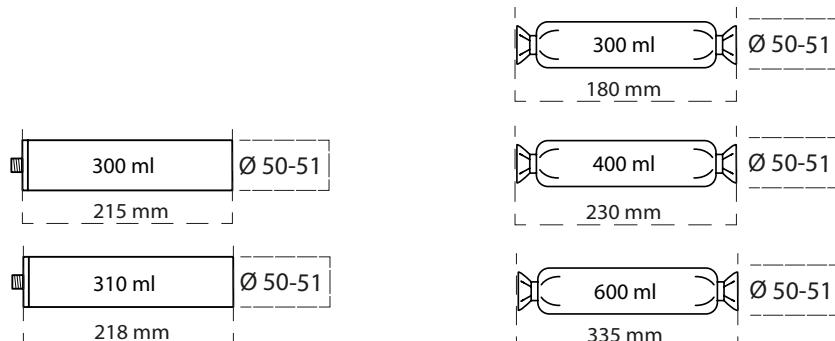

1-components Pneumatic Applicators



METAL PISTON INSIDE THE APPLICATOR



PLASTIC ADAPTER INCLUDED FOR EXTRUDING SOFT PACKS

CSG II 450





Professional Pneumatic applicator for the extrusion of sealers and adhesives, packed in standard cartridges (especially suitable for aluminum cartridges) or soft-packs.

Thanks to the mechanical piston the product is not in contact with air pressure.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)
ART. CODE	1020193
Net weight	1.416 g.
Work pressure	0-10 bar
Total Length	565 mm
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)

PACKAGING

Multiple packing			
	42x49x61 cm	10 pz	19 Kg
Single packing			

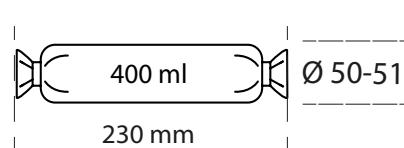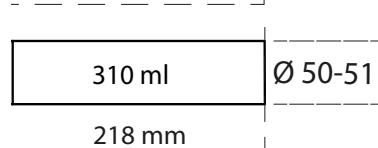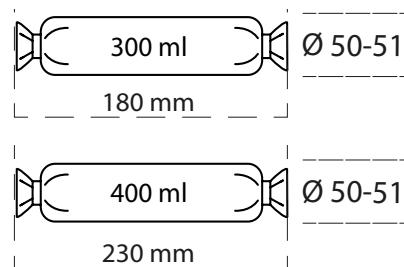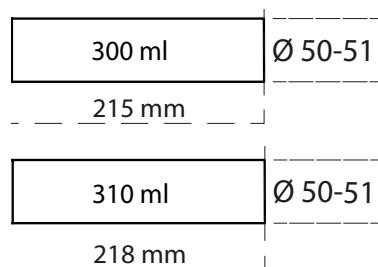

1-components Pneumatic Applicators

CSG II MP 450

Professional pneumatic applicator for the extrusion of high viscosity sealers and adhesives, packed in standard cartridges (especially suitable for aluminum cartridges) or soft-packs.

Thanks to the piston single-stage the product is not in contact with air under pressure.

Dump valve integrated (dripless).




The CSG II MP 450 with pneumatic return is also available, upon request.



WAY OF EXTRUSION	MECHANICAL (rod driven piston)
ART. CODE	1020214
Net weight	1.982 g.
Work pressure	0-10 bar
Total Length	565 mm
Max Force	380 Kgf (10 bar - 145 PSI) - 3,72 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Without Pneumatic return.

PACKAGING

Single packing

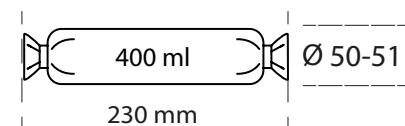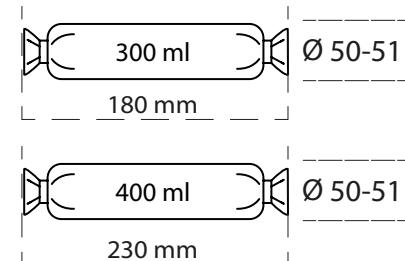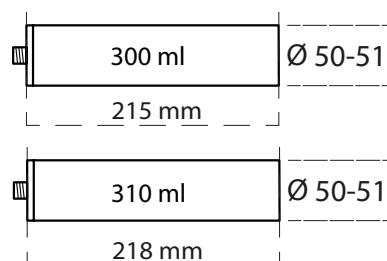

1-components Pneumatic Applicators



CSG II MP 600

Professional Pneumatic applicator for the extrusion of high viscosity sealers and adhesives, packed in standard cartridges (especially suitable for aluminum cartridges) or soft-packs.

Thanks to the piston single-stage the product is not in contact with air pressure.

Dump valve integrated (dripless)
The CSG II MP 600 with pneumatic return is also available, upon request.








WAY OF EXTRUSION

MECHANICAL (rod driven piston)

ART. CODE	1020334
Net weight	2.100 g.
Work pressure	0-10 bar
Total Length	820 mm
Max force	380 Kgf (10 bar- 145 PSI) - 3,72 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Without Pneumatic return

PACKAGING

Single packing



1-components Pneumatic Applicators





CSG II 660

Pneumatic applicator for the extrusion of sealers and adhesives, packed in specific soft-packs.

Used especially in the nautical sector.

WAY OF EXTRUSION	MECHANICAL (by means of a piston)	PACKAGING			
ART. CODE	1020303	Single packing			
Net weight	1.500 g.				
Work pressure	0-10 bar				
Tube lenght	1150 mm				
Max force	200 Kgf (10 bar - 145 PSI)-1,961 kN				
Connection	1/4 male gas				
Noise Level	<80 dBA				
Features	Pressure reducer integrated Dump valve integrated (dripless)				

SACCHETTI

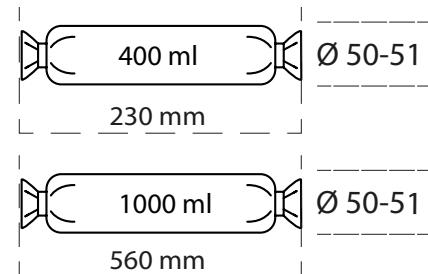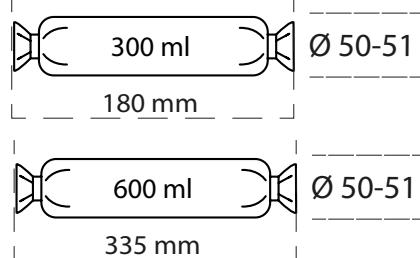

Also available is the CSG II 1100 for extruding 1800 ml soft-pack.

1-components Pneumatic Applicators



CSG II FLOOR RAKE (OPTIONAL)



SPECIAL SUPPORT SYSTEM (OPTIONAL)



WAY OF EXTRUSION

MECHANICAL (by means of a piston)


ART. CODE	1020076
Net weight	3.000 g.
Work pressure	0-10 bar
Tube lenght	1000 mm
Max force	250 Kgf (8 bar - 116 PSI) 2,45 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless)


CSG II FLOOR

Professional Pneumatic applicator for the extrusion of sealers and adhesives on civilian or industrial large surfaces like airport pavement or wooden floors. It extrudes the products packed in 1800 ml soft-packs.

SPECIAL SUPPORT SYSTEM (not included)

Professional support system for CSG FLOOR, which is calibrated for the best comfort during the use by the operator, with our mechanical assistance system on the extrude surface. This system is designed to give the possibility to set-up and adjust the distance of the nozzle from the floor. Easy to move it thanks to the wheels, it represent the innovative way to glue any kind of floors.

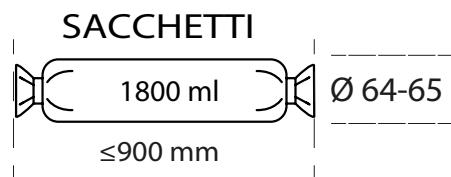

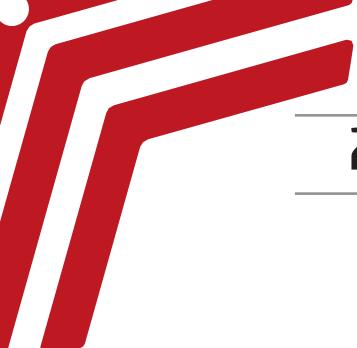

2-components Pneumatic Applicators

In this second section of the catalogue, you will find an overview of our two-component applicators for the extrusion of high-viscosity sealants and adhesives, packaged in cartridges or bags.

Most two-component applicators can be supplied in MP (Medium Power) and P (Power) versions depending on the maximum force required. The main difference between MP (Medium Power) and P (Power) is the pushing force. The MP version has a 75 mm cylinder and can reach 3 kN, whereas the P version has a 96 mm cylinder and can reach 5 kN.

Our ***Made in Italy*** two-component pneumatic applicators are made of aluminium to guarantee high resistance and lightness. The cradles containing the cartridges are closed for maximum safety during extrusion. In the unlikely event of damage, our aluminium cradles can be easily repaired due to their modular construction.

All P.M.T. air guns have an integrated pressure reducer and are equipped with a quick release valve.

Our two-component applicators are normally sold with a pneumatic return.

To improve working comfort, either in a fixed position or in the assembly line, the applicators are equipped with a sturdy metal hook, so that the applicator can be hung while in use or attached to a tool balancer.

The ergonomically balanced handle offers comfortable handling.

They are widely used in various industries: automotive, construction, shipyards, assembly lines, body shops, glassworks and more.

2-components Pneumatic Applicators




CSG II BCX 50

Professional Pneumatic applicator for the extrusion of all types of products, high viscosity sealing and adhesive products, packed in side by side cartridges.

Thanks to the single-stage piston, the product does not come into contact with the air under pressure.

Adapter included 1:1. - 2:1

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020336	
Net weight	1540 g.	
Work pressure	0-10 bar	
Tube lenght	240 mm	
Max force	160 Kgf (8 bar - 116 PSI)- 1,569 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

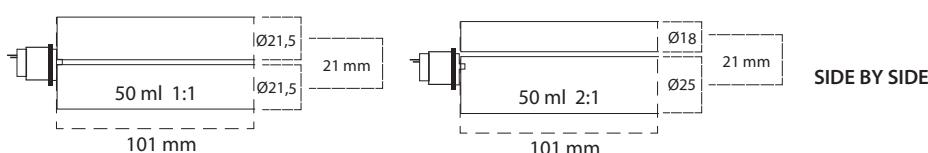

SIDE BY SIDE

2-components Pneumatic Applicators




CSG II MP BCX / 200

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridges 200 ml packed in side by side cartridges 200 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)
ART. CODE	1020346
Net weight	3.125 g
Work pressure	0-10 bar
Max Force	380 kgf (10 bar - 145 PSI) - 3,72 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return

PACKAGING

Single packing

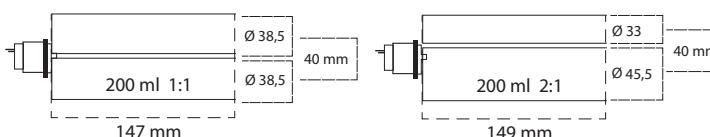

SIDE BY SIDE


2-components Pneumatic Applicators



CSG II MP BCX / 250

Professional pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridges 250 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING		
ART. CODE	1020398	Single packing		
Net weight	3.800 g			
Work pressure	0-10 bar			
Max force	380 Kgf (10 bar - 145 PSI) - 3,72 kN			
Connection	1/4 male gas			
Noise Level	<80 dBA			
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return			

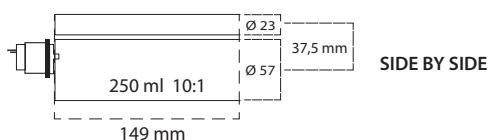


2-components Pneumatic Applicators



CSG II MP CTX/300

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in coaxial cartridges.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020287	
Net weight	1.980 g	
Work pressure	0-10 bar	
Max force	380 Kgf (10 bar - 145 PSI) - 3,72 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

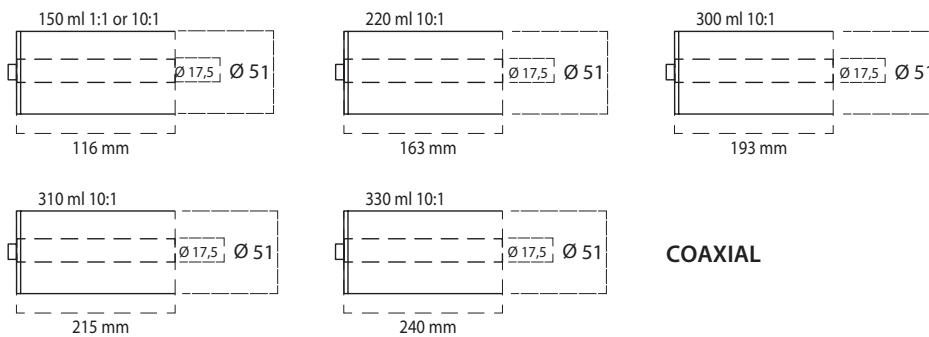

COAXIAL

2-components Pneumatic Applicators



CSG II MP BCX/345


CSG II P BCX/345

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridges 345 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	MECHANICAL (rod driven piston)
	CSG II MP BCX / 345	CSG II P BCX / 345
ART. CODE	1020240	1020337
Net weight	3.160 g	3.300 g
Work pressure	0-10 bar	0-10 bar
Total Length	570 mm	570 mm
Max force	380 Kgf (10 bar - 145 PSI) - 3,72 kN	600 Kgf (10 bar - 145 PSI) - 6 kN
Connection	1/4 male gas	1/4 male gas
Noise Level	<80 dBA	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return

PACKAGING

Single packing

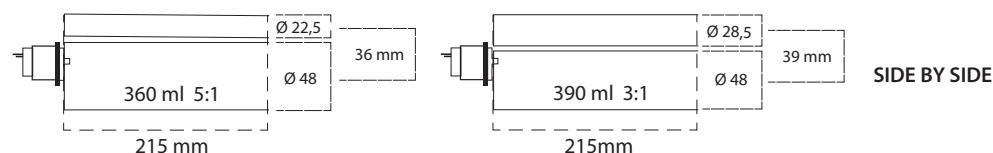

SIDE BY SIDE

2-components Pneumatic Applicators



CSG II MP CTX / 400

CSG II P CTX / 400


Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in coaxial cartridges.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)
	CSG II MP CTX / 400
ART. CODE	1020213
Net weight	3.390 g
Work pressure	0-10 bar
Total Length	510 mm
Max Force	380 Kgf (10 bar - 145 PSI) - 3,72 kN
Connection	1/4 male gas
Noise Level	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return

MECHANICAL (rod driven piston)
CSG II P CTX / 400
1020343
3.910 g
0-10 bar
510 mm
600 Kgf (10 bar - 145 PSI) - 5,88 kN
1/4 male gas
<80 dBA
Pressure reducer integrated Integrated air discharge valve Pneumatic return

PACKAGING

Single packing

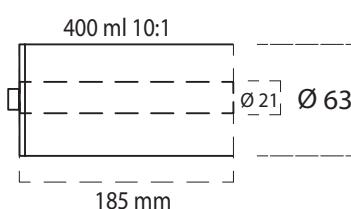

2-components Pneumatic Applicators




CSG II MP BCX/400

CSG II P BCX / 400


Professional Pneumatic applicator for the extrusion of all types of products, high viscosity sealing and adhesives products, packed in side by side cartridges of 400 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	MECHANICAL (rod driven piston)
	CSG II MP BCX/400	CSG II P BCX/400
ART. CODE	1020344	1020345
Net weight	3.150 g	3.920 g.
Work pressure	0-10 bar	0-10 bar
Total Length	520 mm	520 mm
Max Force	380 Kgf (10 bar - 145 PSI) - 3,72 kN	600 Kgf (10 bar - 145 PSI) - 6 kN
Connection	1/4 male gas	1/4 male gas
Noise Level	<80 dBA	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return
OPTIONAL		
Micro pressure reducer	3080114	3080114

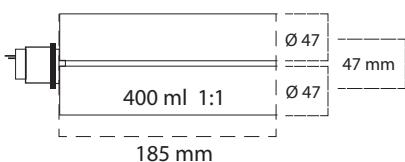

PACKAGING

Single packing

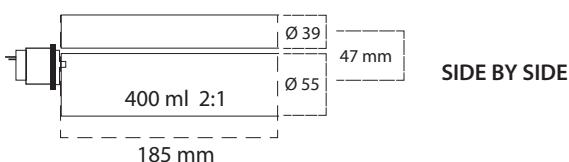

SIDE BY SIDE

2-components Pneumatic Applicators




CSG II MP BCX/490

CSG II P BCX / 490

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridges 490 ml ratio 10:1.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	MECHANICAL (rod driven piston)
	CSG II MP BCX/490	CSG II P BCX/490
ART. CODE	1020288	1020339
Net weight	3.650 g	4.260 g
Work pressure	0-10 bar	0-10 bar
Total Length	520 mm	520 mm
Max force	380 Kgf (10 bar - 145 PSI) - 3,72 kN	600 Kgf (10 bar - 145 PSI) - 5,88 kN
Connection	1/4 male gas	1/4 male gas
Noise Level	<80 dBA	<80 dBA
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return

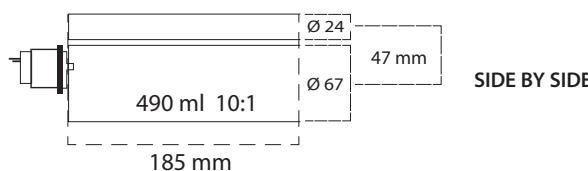

PACKAGING

Single packing




2-components Pneumatic Applicators



CSG II MP BCX / 585

Professional Pneumatic applicator with cradle with side lading for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridges 385- 400- 470 and 585 ml ratio 3:1.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020285	
Net weight	3.600 g.	Single packing
Work pressure	0-10 bar	
Tube lenght	220 mm	
Max Force	380 Kgf (10 bar - 145 PSI) - 3,72 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

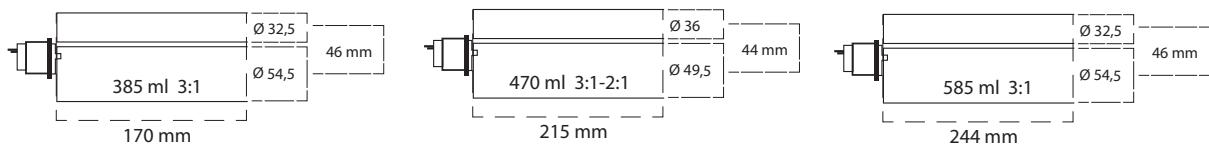

SIDE BY SIDE




2-components Pneumatic Applicators



CSG II MP BCX/600

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridge 600 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020202	
Net weight	3.590 g.	
Work pressure	0-10 bar	
Tube lenght	220 mm	
Max Force	380 Kgf (10 bar - 145 PSI) - 3,72 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

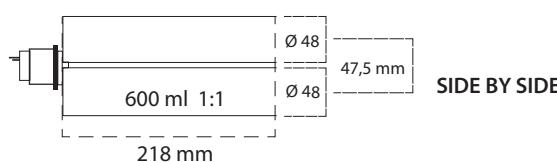


2-components Pneumatic Applicators



CSG II P BCX/825

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packaged in side by side cartridges of 825 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020401	
Net weight	4.665 g.	
Work pressure	0-10 bar	
Max force	600 Kgf (10 bar - 145 PSI) - 5,88 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

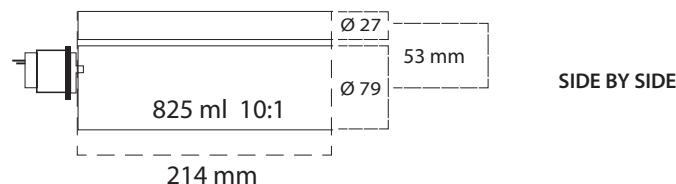

SIDE BY SIDE




2-components Pneumatic Applicators



CSG II P BCX/1200

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packaged in side by side cartridges of 900/1050/1200 ml 2:1/2:1/2,5:1.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020397	
Net weight	4.840 g.	Single packing
Work pressure	0-10 bar	
Max force	600 Kgf (10 bar - 145 PSI) - 5,88 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

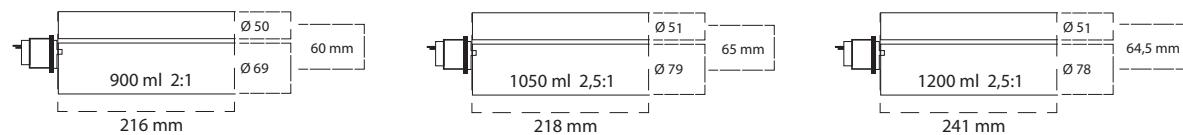

SIDE BY SIDE


2-components Pneumatic Applicators



CSG II P BCX / 1500

Professional Pneumatic applicator for the extrusion of all type high viscosity and chemical anchor products, packed in side by side cartridges of 1.500 ml.

WAY OF EXTRUSION	MECHANICAL (rod driven piston)	PACKAGING
ART. CODE	1020349	
Net weight	5.430 g	
Work pressure	0-10 bar	
Max force	600 Kgf (10 bar - 145 PSI) - 5,88 kN	
Connection	1/4 male gas	
Noise Level	<80 dBA	
Features	Pressure reducer integrated Dump valve integrated (dripless) Pneumatic return	

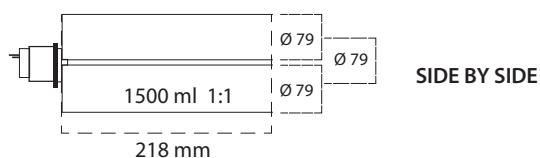

SIDE BY SIDE

Nozzle available for soft-pack and cartridges

For the extrusion of product contained in soft-pack and by using the following nozzles, use:

THE ADAPTER FOR SOFT-PACK
Cod. 3080010



NOZZLE
for soft-pack



ADAPTER
for soft-pack



Thread 15 x 1,5



NOZZLES
for aluminium
cartridge

Threaded 15 x 1,5
mm



For the extrusion of product contained in soft-pack and by using the following nozzles, use:

THE ADAPTER FOR SOFT-PACK
Cod. 3080225



ADAPTER
for plastic cartridge

Threaded 15 x 2,5 mm



NOZZLES
for plastic cartridge

Threaded 15 x 2,5 mm



Nozzles for the extrusion of silicone and sealants, PU foam in different lengths.



Different openings available in different positions, depending on user needs and material viscosity.



ADAPTER for cartridges and
soft-pack.
Also available Threaded
12x2,5 mm and 15x1,5 mm



For cartridges and soft-packs



PRIVATE LABEL

Private Label is a product PERSONALISATION service that P.M.T. offers its customers. It is possible, on request, to characterise the guns following the style of your brand, inserting your logo, name and description of the article. Many P.M.T. customers use the private label service to personalise their products.



LOGO

Private Label is a product PERSONALIZATION service that P.M.T. offers its customers. It is possible, on request, to characterise the guns following the style of your brand, inserting your logo, name and description of the article. Many P.M.T. customers use the private label service to personalise their products.



COLOR

In keeping with the style of your brand, we produce individual components in the desired colour, such as the handle or metal components, for which we use special treatments such as anodising and specific paint finishes.

We also select the best collaborators to ensure that your product is unique and eye-catching.

Customized laser marking upon request



NOTE

NOTE

NOTE

Other available products



Pneumatic Applicators



Manual applicators




Cordless Applicators



Foam guns and Adhesive guns



Coating guns



Spray guns



Fittings



Service guns



P.M.T. s.r.l.
Via G. Marconi, 3/7 - Zona Artigianale Nord
24051 Antegnate (BG)
Tel. +39 0363 905025 | Fax +39 0363 905200
www.pmt.it | info@pmt.it