



PRODUCT CERTIFICATES VALID FROM 06.26.2026 TO 06.30.2027

WUI-CERTIFIED PRODUCTS BROCHURE

/ FEATURING

WHAT IS WUI? | DIGITAL DOCS SHEET | DIGITAL BROCHURE ACCESS

PRODUCT WUI CERTIFICATION DOCUMENTS

YOUR SAFETY MATTERS TO US.



Cal Fire

The California Office of the State Fire Marshal Fire Engineering team has reviewed the technical documents for each of our products and deemed them acceptable to be included in the Cal Fire Building Materials Listing Program (BLM). Learn more at fire.ca.gov.

WESTERN WOODS

CALL US (800) 824-4100 // **VISIT US ONLINE** www.westernwoodsinc.com

INTRODUCTION

At Western Woods, safety matters to us. Every day we strive to make lumber products that deliver industry-leading durability, performance, and safety. As more people are building into the **Wildland-Urban Interface (WUI)**, we recognize the risks and responsibilities that come with that. We take wildfires seriously, and for us, it's personal. Our team has experienced firsthand the effects of wildfires on our communities. On our friends. On our loved ones. In response, our team has pursued methods to produce lumber that delivers increased survivability in fire and wildfire events. Whether your project is a home, a commercial structure, or a simple outbuilding, every moment your structure is able to withstand fire matters.

With that in mind, our team is proud to announce that our **Premium Designs™** lumber products* have been produced to comply with the rigorous standards outlined in the **WUI Products Handbook**. Published by the **California State Fire Marshal (SFM)** as a supplemental part of the California Building Code (CBC)**, the WUI Products Handbook outlines all of the products that have been reviewed by the SFM Staff and had their compliance verified based upon a thorough analysis of product performance test results and product reliability features. Every WUI-verified product is listed, cataloged, and a listing number is then attached to the product.

To learn more about the WUI and WUI initiatives, please visit the CalFire website at <https://osfm.fire.ca.gov> (or scan the QR code to the right). To see our complete listing of WUI-compliant products, visit our website **westernwoodsinc.com** or turn to **Page 027**.



SCAN HERE

* Including Western Woods ENDURAWOOD™, PROFORMAWOOD™, ENDURASHIELD™, and PROFORMASHIELD™ lumber products. Additional, non Premium Designs™ products, have been listed as well. See our website for details.

** WUI-Certified lumber products are now mandatory within the 2022 California Building Code (CBC).

The Camp Fire, 2018

When the catastrophic Camp Fire wiped out the town of Paradise, the Butte County community - *the community we call home* - was devastated. The disaster was a severe reminder of the sheer destructive power of wildfires. All of us came together to pick up the pieces, to help those that lost in the fire, and make strides toward a safer future. For us, wildfires are personal.

TABLE OF CONTENTS



CONNECT WITH US

VISIT OR MAIL US

VISIT: 275 Sikorsky Ave.
Chico, CA 95973

MAIL: P.O. Box 4402
Chico, CA 95927

CALL US OR VISIT US ONLINE

Tel (800) 824-4100
(800) 822-8157

Fax (800) 894-8601

www.westernwoodsinc.com

info@westernwoodsinc.com

LET'S GET SOCIAL

 @westernwoodsinc

 Western Woods, Inc.

 Western Woods, Inc.



SCAN HERE TO VISIT
OUR WEBSITE.

WUI-CERTIFIED PRODUCTS

- 001 **8140-2084:0001**
EXTERIOR WALL SIDING AND SHEATHING
- 005 **8110-2084:0002**
DECKING
- 009 **8140-2084:0003**
EXTERIOR WALL SIDING AND SHEATHING
- 013 **8140-2084:0004**
EXTERIOR WALL SIDING AND SHEATHING
- 017 **8140-2084:0005**
EXTERIOR WALL SIDING AND SHEATHING
- 021 **8140-2084:0006**
EXTERIOR WALL SIDING AND SHEATHING
- 024 **WESTERN WOODS WUI-CERTIFIED PRODUCTS**
- 024 ENDURAWOOD™ PREMIUM PATTERNS + TRIM
- 026 PROFORMAWOOD™ PREMIUM REDWOOD PATTERNS + TRIM COLLECTION

RESOURCES

- 004 **WUI // THE STATISTICS**
THE WUI IS GROWING IN THE US. SEE THE DATA BEHIND IT.
- 012 **WUI // TRENDS**
SEE THE TRENDS OF WUI AND THE DATA BEHIND THEM.
- 016 **WUI // IT'S CODE**
RESOURCES FEATURING BUILDING CODES + WUI.
- 020 **WUI // PRODUCTS**
LEARN WHY WUI PRODUCTS ARE BETTER PRODUCTS.
- 028 **WESTERN WOODS BROCHURES + GUIDES**
OUR LINEUP OF BROCHURES AND GUIDES TO TAKE YOUR SUCCESS FURTHER.
- 029 **DIGITAL DOCS**
CENTRALIZED QR CODE DIRECTORY FOR ALL PRODUCTS



PRODUCT // No. 8140-2084:0001

EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (WUI)

AVAILABLE PROFILES

- > SHIPLAP
- > LOG CABIN
- > CHANNEL SHIPLAP
- > V SHIPLAP
- > TONGUE + GROOVE



SCAN HERE

- ◀ Scan the QR code to get a digital copy of the certification document for this product.
- ▶ QR codes for all of our WUI-certified products may be found on **PAGE 029** or at **westernwoodsinc.com**.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

LISTING No.:	8140-2084:0001
PARENT LISTING No.:	8140-2041:0001
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, Linda (530) 343-5821 (530) 343-3851 Email: lindsay@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets. a. Tongued & Grooved, Shiplap, Channel Shiplap, V Shiplap, Log Cabin: When applied in a horizontal orientation with minimum nominal 6" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", "Ponderosa Pine", "Douglas Fir", "White Fir", "Western Spruce", or any other wood species having a Flame Spread Rating not greater than 150 (Class C) when tested in accordance with ASTM E84. b. Tongued & Grooved, Shiplap, Channel Shiplap, V Shiplap: When applied in a vertical orientation with minimum nominal 6" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", "Ponderosa Pine", "Douglas Fir", "White Fir", and "Western Spruce", or any other wood species having a Flame Spread Rating not greater than 100 (Class C) when tested in accordance with ASTM E84. All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

MARKING:	Listee name. Model number, rating and SFM label.
APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/26/2026

Listing Expires: 06/30/2027

Authorized By: **Michael Huang** , Program Coordinator
Fire Engineering & Investigations Division

ALWAYS STAY UP TO DATE.

GET THE LATEST RELEASE OF THIS CERTIFICATE BY

SCANNING THE PRODUCT QR OR BY VISITING OUR WEBSITE.

Unbranded copies of this document are available for download at WESTERNWOODSINC.COM. Get it on your device instantly by scanning the QR Code on PAGE 029.


BY THE NUMBERS: WUI + WILDFIRE STATISTICS



The WUI is the fastest growing land use type in the United States.



1 in 3 homes in the U.S. are located in the WUI.

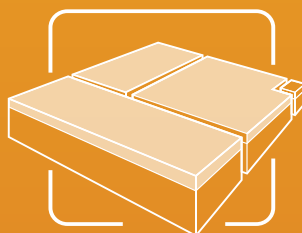

97% of new WUI land was due to new home construction




Wildfires are more frequent, more intense, & are burning 2x longer.*



80 million properties are at 'significant wildfire risk' in the WUI.


NUMBER OF FIRES LARGER THAN 1,000 ACRES³

CONTINENTAL UNITED STATES FROM 1984 TO 2011

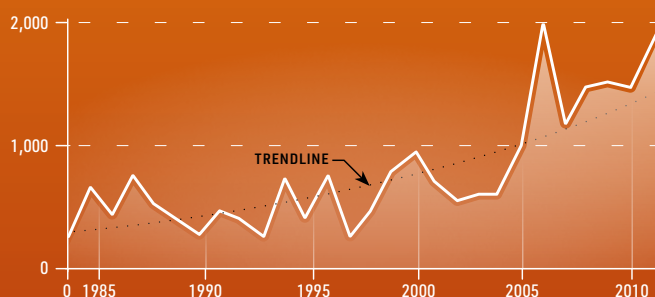

NUMBER OF ACRES BURNED BY WILDFIRES³

CONTINENTAL UNITED STATES FROM 1984 TO 2011

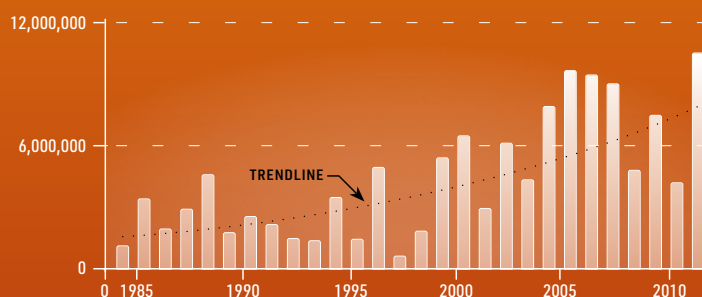

SOURCE 1: "Fueling the Flames." *First Street Foundation*. May 16, 2022. www.firststreet.org | SOURCE 2: "The Wildland-Urban Interface: The Problem, Trends, & Solutions." *Headwater Economics*. August 31, 2018. www.headwatereconomics.org
SOURCE 3: "Overwhelming Cause of California Wildfires: Humans." *National Geographic*. May 17, 2014. <https://www.nationalgeographic.com/culture/article/140517-san-marcos-wildfires-california-weather>

TO LEARN MORE ABOUT THE WILDLAND URBAN-INTERFACE (WUI), VISIT THE CALIFORNIA OFSM WEBSITE: <https://osfm.fire.ca.gov>



PRODUCT // No. 8110-2084:0002

DECKING FOR WILDLAND URBAN INTERFACE (WUI)



SCAN HERE

- ▶ Scan the QR code to get a digital copy of the certification document for this product.
- ▶ QR codes for all of our WUI-certified products may be found on **PAGE 029** or at westernwoodsinc.com.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

LISTING No.:	8110-2084:0002
PARENT LISTING No.:	8110-2041:0002
CATEGORY:	8110 - DECKING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, Linda (530) 343-5821 (530) 343-3851 Email: lindsay@westernwoodsinc.com
DESIGN:	Solid "Wood" decking, when installed over minimum 2" x 6" solid "Douglas Fir" or better joists, spaced 24" or less on center, and decking and joists complying with American Softwood Lumber Standard PS 20 as follows: Minimum nominal 5/4" thick and nominal 6" wide decking boards with a maximum 3/8" radius edges made of solid wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", or "Alaska Yellow Cedar" having a Class B Flame Spread rating when tested in accordance with ASTM E84. Lumber grades: construction common, commercial or better grades for Redwood; 3 common, commercial or better grades for Cedars. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Class B Flame Spread
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.
APPROVAL:	Listed as solid wood decking materials for use in the Wildland Urban Interface areas.
NOTES:	



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/26/2026

Listing Expires: 06/30/2027

Authorized By: **Michael Huang** , Program Coordinator
Fire Engineering & Investigations Division

ALWAYS STAY UP TO DATE.

GET THE LATEST RELEASE OF THIS CERTIFICATE BY

SCANNING THE PRODUCT QR OR BY VISITING OUR WEBSITE.

Unbranded copies of this document are available for download at WESTERNWOODSINC.COM. Get it on your device instantly by scanning the QR Code on **PAGE 029**.

**WUI +
WESTERN WOODS.
WE OFFER:
SHEATHING
DECKING
SIDING
ENDURAWOODTM
SEE
PAGE 024
PROFORMAWOODTM
SEE
PAGE 026**

Call us today at (800) 824-4100 to learn more.

SOURCE 1: "Fueling the Flames." First Street Foundation. May 16, 2022. www.firststreet.org | SOURCE 2: "The Wildland-Urban Interface: The Problem, Trends, & Solutions." Headwater Economics. August 31, 2018. www.headwatereconomics.org

TO LEARN MORE ABOUT THE WILDLAND URBAN-INTERFACE (WUI), VISIT THE CALIFORNIA OFSM WEBSITE: <https://osfm.fire.ca.gov>

WESTERN WOODS

CALL US (800) 824-4100 // **VISIT US ONLINE** www.westernwoodsinc.com



PRODUCT // No. 8140-2084:0003

EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (WUI)

AVAILABLE PROFILES

- > V SHIPLAP (EDGE VEE)
- > CHANNEL SHIPLAP
- > SHIPLAP
- > TONGUE + GROOVE



SCAN HERE

- ◀ Scan the QR code to get a digital copy of the certification document for this product.
- ▶ QR codes for all of our WUI-certified products may be found on **PAGE 029** or at **westernwoodsinc.com**.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

LISTING No.:	8140-2084:0003
PARENT LISTING No.:	8140-2041:0003
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, Linda (530) 343-5821 (530) 343-3851 Email: lindsay@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets. a. Tongued & Grooved, Shiplap, V Shiplap (Edge Vee One Side): When applied in a horizontal orientation with minimum nominal 4" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. An additional face nail is to be added and shall be placed on the face, approximately 1" from the groove edge for T&G or overlapping edge for shiplap designs. b. Tongued & Grooved, Shiplap, Channel Shiplap, V Shiplap (Edge Vee One Side): When applied in a vertical orientation with minimum nominal 4" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. An additional face nail is to be added and shall be placed on the face, approximately 1" from the groove edge for the Tongue & Groove or overlapping edge for shiplap designs. All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.
APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/26/2026

Listing Expires: 06/30/2027

Authorized By: **Michael Huang** , Program Coordinator
Fire Engineering & Investigations Division

ALWAYS STAY UP TO DATE.

GET THE LATEST RELEASE OF THIS CERTIFICATE BY


SCANNING THE PRODUCT QR OR BY VISITING OUR WEBSITE.

Unbranded copies of this document are available for download at WESTERNWOODSINC.COM. Get it on your device instantly by scanning the QR Code on **PAGE 029**.

WUI TRENDS: IT IS RAPIDLY EXPANDING ACROSS THE UNITED STATES.

No. OF HOMES IN THE WUI² RELATIVE TO THE TOTAL No. OF HOMES IN THE STATE (%)


01.7-15% 15.1-30%
30.1-45% 45.1-60% 60.1-82.6%

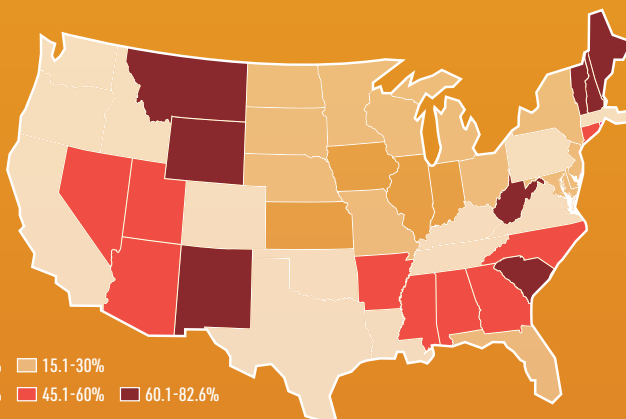


STATES WITH THE GREATEST No. OF HOMES IN THE WUI




GROWTH RATE OF HOMES IN THE WUI¹ FROM 1990 TO 2010 BY STATE

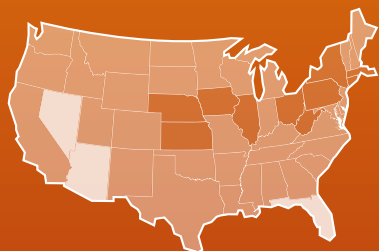

GROWTH RATE OF PEOPLE IN THE WUI¹ FROM 1990 TO 2010 BY STATE

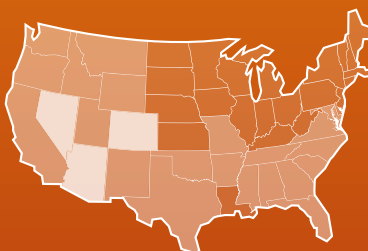

GROWTH RATE OF THE WUI AREA¹ FROM 1990 TO 2010 BY STATE

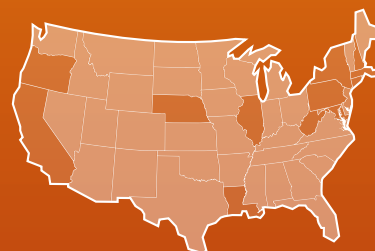

0-25% 26-75% 76-200%

SOURCE 1: "Rapid growth of the US wildland-urban interface raises wildfire risk." *PNAS*. February 6, 2018. www.pnas.org | SOURCE 2: "What is the WUI?" *U.S. Forest Service + U.S. Fire Administration*. Date unknown. www.usfa.fema.org

TO LEARN MORE ABOUT THE WILDLAND URBAN-INTERFACE (WUI), VISIT THE CALIFORNIA OFSM WEBSITE: <https://osfm.fire.ca.gov>



PRODUCT // No. 8140-2084:0004

EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (WUI)

AVAILABLE PROFILES

> RABBETED BEVEL



SCAN HERE

- ◀ Scan the QR code to get a digital copy of the certification document for this product.
- ▶ QR codes for all of our WUI-certified products may be found on **PAGE 029** or at **westernwoodsinc.com**.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

LISTING No.:	8140-2084:0004
PARENT LISTING No.:	8140-2041:0004
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, Linda (530) 343-5821 (530) 343-3851 Email: lindsay@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets. Rabbeted Bevel: When applied in a horizontal orientation with minimum nominal 6" wide and nominal 1" thick boards made of a wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.
APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

NOTES:

11-23-11bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/26/2026

Listing Expires: 06/30/2027

Authorized By: **Michael Huang** , Program Coordinator
Fire Engineering & Investigations Division

ALWAYS STAY UP TO DATE.

GET THE LATEST RELEASE OF THIS CERTIFICATE BY

SCANNING THE PRODUCT QR OR BY VISITING OUR WEBSITE.

Unbranded copies of this document are available for download at WESTERNWOODSINC.COM. Get it on your device instantly by scanning the QR Code on PAGE 029.

RESOURCE
LINKSCALIFORNIA BUILDING
CODE TITLE 7COLORADO WILDFIRE
RESILIENCY CODE2023 OREGON
RESIDENTIAL
SPECIALTY CODEINTERNATIONAL
WILDLAND-URBAN
INTERFACE CODE

BUILD SMARTER. BUILD BETTER. IT'S NOW CODE.

Starting in California. Refer to the 2025 California Building Code, Title 24, Section 7A. Scan the QR code to learn more.

ADOPTION OF WUI BUILDING CODES IS SPREADING

STATES WITH SPECIFIC STATE- WIDE WUI BUILDING CODES:^{1,2}

» California » Oregon » Colorado
» Washington

STATES THAT APPLY WUI BUILDING CODES LOCALLY + REGIONALLY:¹

» New Mexico » Idaho » Wyoming

STATES THAT HAVE FORMALLY ADOPTED THE IWUIC:^{1,3}

» Montana » Nevada
» Pennsylvania » Utah

THE FEDERAL GOVERNMENT requires that new federal buildings over 5,000 ^{sq/ft} built in the WUI must adhere to **International Wildland Urban-Interface Code (IWUIC)**.

¹ SOURCE: Headwater Economics, "Tracking Western states' diverse approaches to wildfire building codes." <https://headwaterseconomics.org/natural-hazards/wildfire/tracking-western-states-diverse-approaches-to-wildfire-building-codes/>

² SOURCE: Michigan State University, "The Wildland Urban Interface and Fire Management Policies." https://www.canr.msu.edu/fccp/uploads/Files/4h.%20WUI%20Policies_FINAL.pdf | ³ IWUIC: "International Wildland Urban-Interface Code."

TO LEARN MORE ABOUT THE WILDLAND URBAN-INTERFACE (WUI), VISIT THE CALIFORNIA OFSM WEBSITE: <https://osfm.fire.ca.gov>



PRODUCT // No. 8140-2084:0005

EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (WUI)

AVAILABLE PROFILES

> BOARD + BATTEN



SCAN HERE

- ◀ Scan the QR code to get a digital copy of the certification document for this product.
- ▶ QR codes for all of our WUI-certified products may be found on **PAGE 029** or at westernwoodsinc.com.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

LISTING No.:	8140-2084:0005
PARENT LISTING No.:	8140-2041:0005
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, Linda (530) 343-5821 (530) 343-3851 Email: lindsay@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets. Board and Batten: When applied in a vertical orientation with minimum nominal 8" wide and nominal 1" thick boards, and minimum nominal 4" wide and nominal 1-1/4" thick battens, with boards installed with a gap not more than 1/2", with battens fastened to the wood frame with not less than 3" long fasteners at a schedule not more than 24" on center, and boards and battens made of a wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/26/2026

Listing Expires: 06/30/2027

Authorized By: **Michael Huang** , Program Coordinator
Fire Engineering & Investigations Division

ALWAYS STAY UP TO DATE.

GET THE LATEST RELEASE OF THIS CERTIFICATE BY

SCANNING THE PRODUCT QR OR BY VISITING OUR WEBSITE.

Unbranded copies of this document are available for download at WESTERNWOODSINC.COM. Get it on your device instantly by scanning the QR Code on **PAGE 029**.

8140-2084:0005 | SIDING

WUI-CERTIFIED PRODUCTS EQUAL BETTER PRODUCTS.

*WUI-Certified lumber products burn more slowly
in the event of a fire, giving occupants the additional
time they need to get what matters most out and to safety.*

SOURCE 1: "Fueling the Flames." *First Street Foundation*. May 16, 2022. www.firststreet.org | SOURCE 2: "The Wildland-Urban Interface: The Problem, Trends, & Solutions." *Headwater Economics*. August 31, 2018. www.headwatereconomics.org

TO LEARN MORE ABOUT THE WILDLAND URBAN-INTERFACE (WUI), VISIT THE CALIFORNIA OFSM WEBSITE: <https://osfm.fire.ca.gov>

WESTERN WOODS

CALL US (800) 824-4100 // **VISIT US ONLINE** www.westernwoodsinc.com



PRODUCT // No. 8140-2084:0006

EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (WUI)

AVAILABLE PROFILES

> BOARD ON BOARD



SCAN HERE

- ◀ Scan the QR code to get a digital copy of the certification document for this product.
- ▶ QR codes for all of our WUI-certified products may be found on **PAGE 029** or at westernwoodsinc.com.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

LISTING No.:	8140-2084:0006
PARENT LISTING No.:	8140-2041:0008
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, Linda (530) 343-5821 (530) 343-3851 Email: lindsay@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets. Board on Board: When applied in a vertical orientation with minimum nominal 8" wide and nominal 1" thick boards, and 3/4" thick x 3-1/2" wide plywood inserts between boards, with boards and plywood inserts installed with a gap not more than 1/8" between them and fastened to the wood frame with not less than 3" long fasteners at a schedule not more than 24" on center, and boards made of a wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.



**CALIFORNIA DEPARTMENT OF FORESTRY & FIRE
PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING & INVESTIGATIONS DIVISION
BUILDING MATERIALS LISTING PROGRAM**

LISTING SERVICE

APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/26/2026

Listing Expires: 06/30/2027

Authorized By: **Michael Huang** , Program Coordinator
Fire Engineering & Investigations Division

ALWAYS STAY UP TO DATE.

GET THE LATEST RELEASE OF THIS CERTIFICATE BY

SCANNING THE PRODUCT QR OR BY VISITING OUR WEBSITE.

Unbranded copies of this document are available for download at WESTERNWOODSINC.COM. Get it on your device instantly by scanning the QR Code on **PAGE 029**.

ENDURAWOOD™

PREMIUM PATTERNS + TRIM COLLECTION BY WESTERN WOODS

ENDURANCE // (noun). The ability to withstand hardship or adversity.

**DURABLE,
VERSATILE,
AFFORDABLE.
IT'S WHAT WE
DO.**

KEYWORDS //

SPF PATTERNS + TRIM WUI-CERTIFIED SHIELD SERIES CAPABLE
CLEAR INTERIOR/EXTERIOR FACTORY PRIME FACTORY STAIN

—>> PRODUCT HIGHLIGHTS

- ▶ Easily works with both hand and with power tools.
- ▶ Available with primed, stained, or a natural finish.
- ▶ Great for both indoor and outdoor projects.
- ▶ Numerous pattern and finish options.

—>> PRODUCT INTRODUCTION

At Western Woods we do not believe affordable building material should translate into sub-standard quality or performance. With **Western Woods ENDURAWOOD™ Premium Patterns + Trim Collection** you will find a great wood product that strikes the right balance of strength, value, and quality appearance without breaking your budget.

ENDURAWOOD™ is easy to work with, whether you are working with the material by hand or with power tools. Thanks to the fine, smooth grain found at the heart of ENDURAWOOD™, each piece is able to firmly grip onto most paints, stains, and other surface applications with ease, allowing you to achieve a clean, exceptional look without any grain raising or deformation. This enables your build to maintain a refined, quality appearance over time.

ENDURAWOOD™ offers the versatility you need to take on a wide variety of applications. From window and door trim to siding, fascia to ceilings, and more. Made possible by its strength and versatility, ENDURAWOOD™ comes in a wide range of patterns and textures. And for those challenging projects, we can make the perfect piece with our custom pattern service.

—>> SIZE + TEXTURE OPTIONS

SIZES + OPTIONS* | PREMIUM PATTERNS + TRIM COLLECTION

SPECIES	SIZE	LENGTH	TEXTURE/PATTERN
SPF	1x6-1x12, 2x6-2x12	8-20'	Resawn / Combed / Rougher Head / S4S
SPF	1x6-1x12	8-20'	WWPA Patterns
SPF	2x6-2x12	8-20'	WWPA Patterns

*Additional sizes available for non WUI-certified applications.

—>> WUI-CERTIFIED PRODUCTS

▶ 8140-2084:0002
DECKING | PG 005




PRODUCT MINI
BROCHURE



LUMBER PATTERN
BOOK

—>> ADDITIONAL RESOURCES

—>> RECOMMENDED APPLICATIONS




Cornerboard



Trim




Band



Fascia



Rake




Siding

—>> PATTERN OPTIONS



WWPA Patterns



Custom Patterns

WUI-CERTIFIED PATTERNS:

- ▶ Tongue & Groove
- ▶ Shiplap
- ▶ Channel Shiplap
- ▶ V Shiplap
- ▶ Log Cabin

—>> FINISHING OPTIONS

- NATURAL
- PRIMED
- STAINED

ADDITIONAL FINISHING OPTIONS

WESTERN WOODS SHIELD™ SERIES - ENDURASHIELD™ | Our treated premium anti-stain primer offering protection from mold, rot and insect damage.

WESTERN WOODS RUSTIC RIDGE™ | Achieve old barnwood looks without the wait using our all-natural treatment.

PROFORMAWOOD™

PREMIUM REDWOOD PATTERNS + TRIM COLLECTION BY WESTERN WOODS

PERFORMANCE // (noun). The execution or accomplishment of work, acts, feats, etc.
PROFESSIONAL // (adj). Done by an expert.

NOW IS THE ERA OF REDWOOD.

→ PRODUCT INTRODUCTION

KEYWORDS // REDWOOD PATTERNS + TRIM FASCIA WUI-CERTIFIED
INTERIOR/EXTERIOR FACTORY PRIME FACTORY STAIN SHIELD SERIES CAPABLE

Builders throughout the U.S. are currently facing significant challenges when building with Western Red Cedar. Obstacles like crushing import tariffs, project-crippling delivery lead times, and a rapidly dwindling local supply. This translates into one thing for builders: increased costs. Opportunity costs. Material costs. Logistical costs. **Introducing your solution – PROFORMAWOOD™ – our Premium Redwood patterns + trim collection.**

Known as the pinnacle of premium lumber, Redwood is admired for its distinct color and revered for its strength and durability. Even better, Redwood is grown here in California. That means freedom from import fees and greater access to inventory than Western Red Cedar. And better yet, being California grown means that you can declare that your lumber was grown, harvested, and milled in the good ole' USA. And that matters more than ever in today's market.

REDWOOD VS CEDAR - A COMPARISON

Redwood and Cedar are two species known to produce lumber that feature amazing looks, exceptional durability, and that are easy to maintain throughout their long service life. This makes the Redwood - **PROFORMAWOOD™** - the perfect replacement for Cedar. See the proof in the comparisons below.

► **STRENGTH** | Redwood delivers a 450lb strength rating on the Janka scale. This is a 23% performance increase over Western Red Cedar (350lbs).

► **DURABILITY** | Redwood offers greater material density. This delivers increased resistance to warping, splitting, and cracking. It also contains greater levels of natural protective oils, making it more resistant to damage from termites and other wood-boring insects.

TRANSIT ENVIRONMENTAL IMPACT |

Grown in California, Redwood requires substantially less logistical effort to get to market than Western Red Cedar (Average of 350 miles vs 1,700 miles).

LONGEVITY |

When used in the same application and following the same maintenance schedule, Redwood lasts substantially longer than Western Red Cedar: delivering an average service life of 20-40 yrs vs 15-25 yrs.


SIZE + OPTIONS

SIZES + OPTIONS* | PREMIUM PATTERNS + TRIM COLLECTION

SPECIES	PATTERN	SIZES	TEXTURE
REDWOOD	T&G WP-4 WC-200 633 WP-11 Bevel Log Cabin WP-105 And More	1x6 +, 2x6 +	STK Clr Appearance Grade Rough S4S S1S2E RS4S FJ Primed
		LENGTHS	
		8'-20'	

*Additional sizes available for non WUI-certified applications.

RECOMMENDED APPLICATIONS




Cornerboard



Trim




Band



Fascia



Rake




Siding

PATTERN OPTIONS



WUI Patterns



Custom Patterns

WUI-CERTIFIED PATTERNS:

- Tongue & Groove
- Channel Shiplap
- V Shiplap (Edge Vee)
- Board on Board
- Rabbeted Bevel
- Shiplap
- V Shiplap
- Log Cabin
- Decking
- Board + Batten

FINISHING OPTIONS

- **NATURAL**
- **PRIMED**
- **STAINED**

ADDITIONAL FINISHING OPTIONS

WESTERN WOODS SHIELD™ SERIES - PROFORMASHIELD™ |

Our treated premium anti-stain primer offering protection from mold, rot and insect damage.

WUI-CERTIFIED PRODUCTS

- **8140-2084:0001**
WALL SHEATHING
PG 001
- **8140-2084:0003**
WALL SHEATHING
PG 009
- **8140-2084:0004**
WALL SHEATHING
PG 013
- **8140-2084:0005**
WALL SHEATHING
PG 017
- **8140-2084:0006**
WALL SHEATHING
PG 021

ADDITIONAL RESOURCES



PRODUCT MINI
BROCHURE



LUMBER PATTERN
BOOK



WE HAVE WHAT YOU NEED FOR SUCCESS.



PRODUCT & SERVICES BROCHURE

COMPANY PROFILE | PRODUCT DESCRIPTIONS |
SERVICE INTROS | SUSTAINABILITY OUTLINE



SCAN HERE


LUMBER PATTERN BOOK



SCAN HERE



DIAGRAMS FOR 70+ PATTERNS | INSTALLATION
INSTRUCTIONS | LUMBER CARE GUIDE



SCAN HERE

LUMBER PATTERN DATA SHEETS

70+ PATTERN SUMMARIES | PRODUCT SIZING
OPTIONS | INSTALLATION INSTRUCTIONS



SCAN HERE

PRODUCT LINE CARD

PRODUCT SIZING | FINISH + PATTERN
OPTIONS | DIGITAL DOCUMENT ACCESS

GET THESE AND MORE AT WESTERNWOODSINC.COM.

DIGITAL CERTIFICATE ACCESS

To get a digital copy of our WUI Certification documentation for easy print or distribution, simply scan the QR Codes below. If you have any questions about our WUI-certified products, please call a member of our knowledgeable sales team at (800) 824-4100 or visit westernwoodsinc.com.

8140-2084:0001

WALL SHEATING | PG 001



8140-2084:0004

WALL SHEATING | PG 013



8110-2084:0002

DECKING | PG 005



8140-2084:0005

WALL SHEATING | PG 017



8140-2084:0003

WALL SHEATING | PG 009



8140-2084:0006

WALL SHEATING | PG 021



HOW TO USE THE QR CODE 1. Unlock your device 2. Open your camera app. 3. Hold your camera over the QR Code. 4. Click on the pop-up

**WE ARE
WESTERN
WOODS™**



WESTERN WOODS

CALL US

Tel (800) 824-4100

Fax (800) 894-8601

FIND US ONLINE:

www.westernwoodsinc.com

info@westernwoodsinc.com

GET A DIGITAL COPY

Get your digital copy of this Pattern Book by scanning the QR Code below. It is convenient for access anytime, anywhere and for sharing with your clients and associates.

LETS GET SOCIAL

Scan the QR Codes below and join us on LinkedIn and Facebook. Check out our feed on Instagram @westernwoodsinc to learn about our products and services, to meet our team, and to find some inspiration for your next project.

LUMBER PATTERN DATA SHEETS

Get access to our exclusive Lumber Pattern Data Sheet digital catalog by scanning the QR Code. Working smarter, working better starts now.

SIGN UP FOR OUR NEWSLETTER

Scan the QR code below to stay up to date with the latest product announcements, news, and events happening here at Western Woods.

**SCAN TO HERE
ADD US TO YOUR
CONTACTS.**

**PREMIUM
DESIGNS [PDF]**



**MAIN LINE
BRO. [PDF]**



**DIGITAL PATTERN
BOOK [PDF]**



**JOIN US ON
MAILCHIMP**



**FOLLOW US ON
LINKEDIN**



**FOLLOW US ON
FACEBOOK**



QR SCANNING TIP: Hold your device 4" - 6" away from back of this Pattern Book for quick and easy scanning.