

Overview


The 5 1/8" Wireline Valve is engineered for safe and reliable pressure control during slickline and electric line operations in larger bore completions. Available in 5,000 and 10,000 PSI working pressures, this valve is offered in single, dual, or triple configurations to match a wide range of wellsite requirements. Designed primarily with hydraulic actuators—while manual options are also available.

Applications

- Used during well interventions to control pressure while inserting or retrieving tools on slickline or electric line—such as for setting plugs, shifting sleeves, or logging operations.
- Accommodating larger tool strings, tool catchers, and lubricators, often used in offshore completions with larger surface equipment.

Key Features & Benefits

- Offered in single, dual, or triple valve configurations to suit your pressure control requirements.
- Available in 5,000 PSI and 10,000 PSI working pressure options.
- Hydraulic actuators standard; manual actuators available upon request.

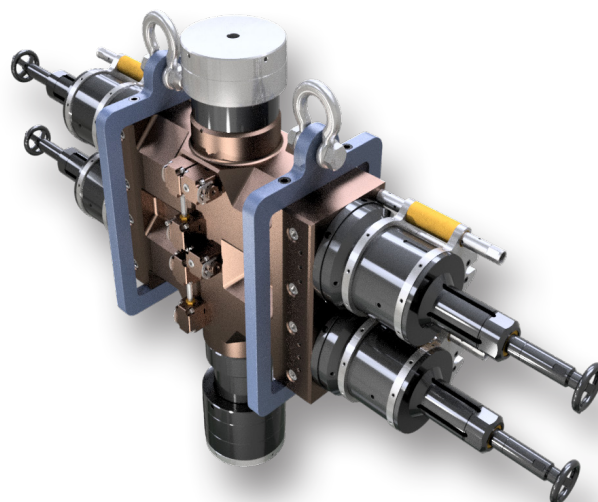

Technical Data - Single Wireline Valve

| Assembly Number | Nominal I.D. | Configuration | Connections | Pressure Rating |
|------------------|--------------|------------------|--------------------------------|-----------------|
| 13-01-WLV-513-A0 | 5.125" | Single Hydraulic | B17 (8.875" 4x2 W/ 6.50" SEAL) | 10,000 PSI |
| 13-01-WLV-513-A1 | 5.125" | Single Hydraulic | B09 (8.250" 4X2 W/6.750" SEAL) | 5000 PSI |
| 13-01-WLV-513-A2 | 5.125" | Single Hydraulic | O10 (9.000" -4 W/ 6.750" SEAL) | 10,000 PSI |
| 13-01-WLV-513-A3 | 5.125" | Single Hydraulic | O07 (8.25" -4 W/ 6.188" SEAL) | 5000 PSI |

Technical Data - Dual Wireline Valve

| Assembly Number | Nominal I.D. | Configuration | Connections | Pressure Rating |
|------------------|--------------|----------------|--------------------------------|-----------------|
| 13-01-DWL-513-A0 | 5.125" | Dual Hydraulic | B17 (8.875" 4x2 W/ 6.50" SEAL) | 10,000 PSI |
| 13-01-DWL-513-A1 | 5.125" | Dual Hydraulic | B09 (8.250" 4X2 W/6.750" SEAL) | 5000 PSI |
| 13-01-DWL-513-A2 | 5.125" | Dual Hydraulic | O10 (9.000" -4 W/ 6.750" SEAL) | 10,000 PSI |
| 13-01-DWL-513-A3 | 5.125" | Dual Hydraulic | O07 (8.25" -4 W/ 6.188" SEAL) | 5000 PSI |