


Color Filter Wheel

CFW14-5

Precision Machined Reliable Performance

FLI color filter wheels are engineered for reliable performance, ideal for harsh or remote environments. Each wheel features a proprietary no-slip drive chain, a precision stepper motor, and a large-diameter pivot pin paired with precision-ground bushings—delivering smooth, quiet, and dependable operation. And because FLI filter wheels do not use internal lights for homing, your images remain fully protected from stray light interference.

The CFW14-5 supports unmounted filters, 1 mm to 5 mm thick.

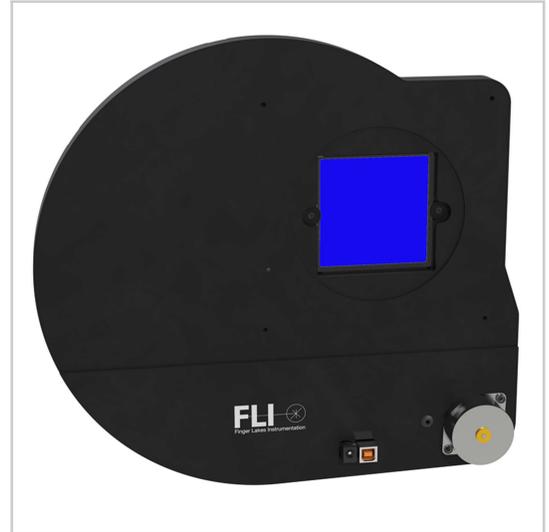

Technical Data

Filter Positions	5
Recommended Filter Size (+/- 0.125 mm)	74.79mm to 76.5mm (Square)
Filter Thickness Range	1.0 to 5.0 mm
Wheels	1
Overall Thickness (less motor)	0.73" (18.5 mm)
Weight	5.2 lbs. (2.36 kg)
Interface	USB
Camera Side Connection	4X M4x0.7-6H by 3.18mm deep on 148mm square
Optical Side Connection	4X M4x0.7-2B by 2.79mm deep on 148mm square
Wheel Material	Aluminum
Power	12V
Drawing	See Accessories page of FLI website



* MADE IN USA *



Finger Lakes Instrumentation
FLIcamera.com
USA 585-624-3760