
Color Filter Wheel

CFW2-7

Rugged Design
Unmatched Precision
Flexible Performance

Our color filter wheel's robust mechanical design provides the basis for stunning, uncompromising images. Each FLI color filter wheel is precision engineered with a highly accurate no-slip drive chain and stepper motor. The large diameter pivot pin and bushings are precision ground and matched for smooth, quiet no-fuss operation night after night. FLI color filter wheels do not use internal lights for homing, so your images are protected from stray light interference.

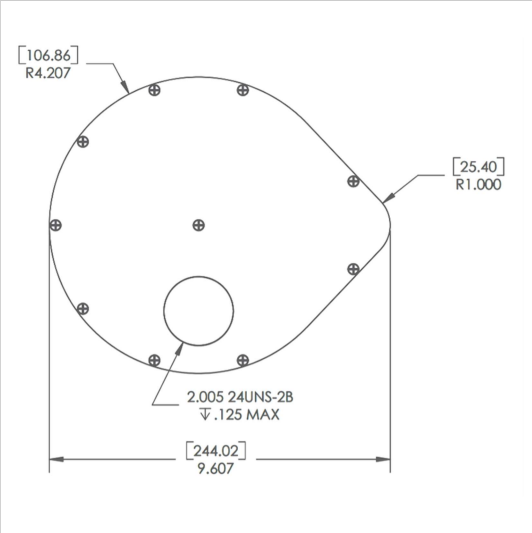

Technical Data

Filter Positions	7
Recommended Filter Size (+/- 0.125 mm)	48.875mm to 2.005" diameter
Filter Thickness Range	1.0 - 5.0 mm
Wheels	1
Overall Thickness (less motor)	20.9 mm
Weight	2.9 lbs. (1.32 kg)
Interface	USB2
Camera Side Connection	2.930" pocket (mates to FLI dovetail)
Optical Side Connection	2.005" 24 UNS-2B
Wheel Material	Aluminum
Power	12V
Drawing URL	https://www.flicamera.com/drawings/CFW2-7.pdf

MADE IN USA

Finger Lakes Instrumentation
https://flicamera.com
USA 585-624-3760