


NOTE: PHOTOGRAPH PATTERN OF EXISTING BRICK PAVERS PRIOR TO REMOVAL. REINSTALL PAVERS IN THE SAME PATTERN AS THE EXISTING PATTERN UNLESS DIRECTED OTHERWISE BY THE OWNER.

KEEP THE CROSSWALKS OPEN TO PEDESTRIAN TRAFFIC TO THE EXTENT FEASIBLE. PROVIDE TEMPORARY FENCING OR PEDESTRIAN BARRICADES AS NEEDED TO PREVENT PEDESTRIAN TRAFFIC INTO THE WORK AREA. (TYPICAL ALL 4 X-WALKS)

High Street

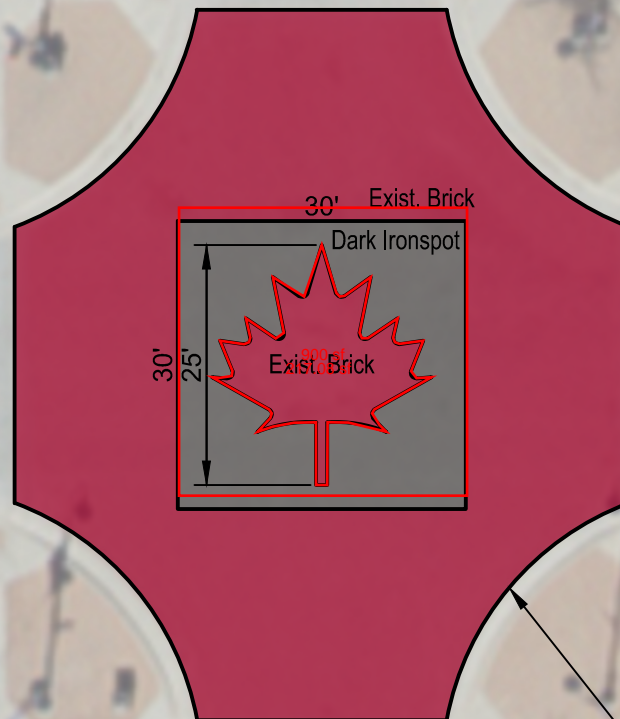

8th Street

REMOVE AND REPLACE 400 SQ. YDS. OF BRICK PAVEMENT IN THE 8th STREET/ HIGH STREET INTERSECTION (BOUNDED BY THE CROSSWALKS). SEE TYPICAL SECTION DETAIL, EXHIBIT 3.