


**REKTA 30 LAMEL
DAMPA**






REKTA 30 DAMPA

direct lighting

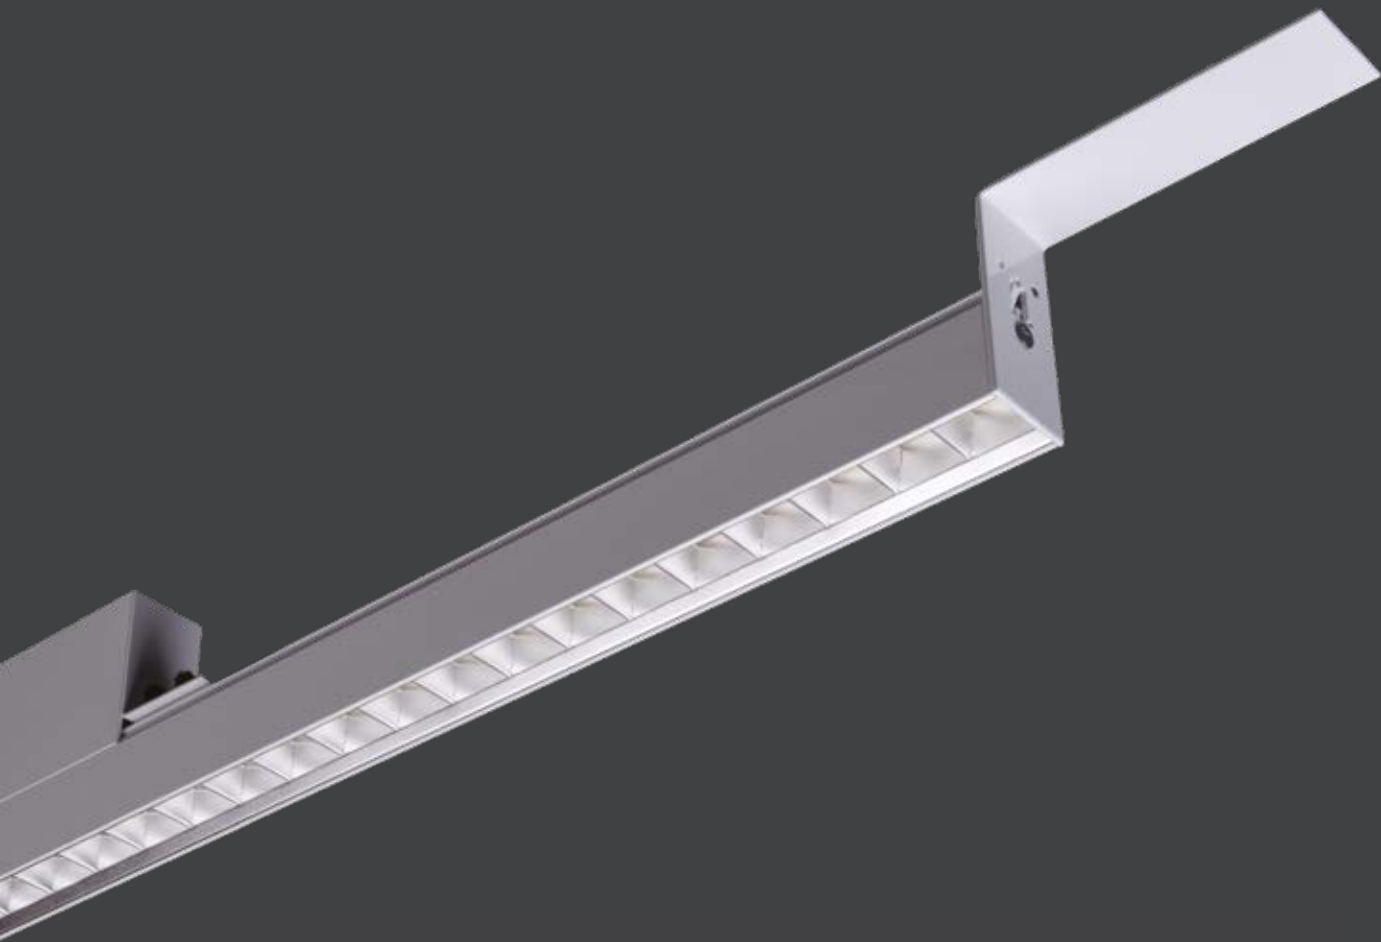

satin



*Driver and emergency module are placed in a separate box for 564 and 844mm profiles.
Max cable length between box and profile is 0,5m.

LOW lumen output

code	A	watt excl. driver	gross lumen	dim	emergency
07.234t052y-zzzz	564	6,4	1340	-	-
07.234t053y-zzzz	844	9,6	2010	-	-
07.234t054y-zzzz	1124	12,8	2680	-	-
07.234t055y-zzzz	1404	16,0	3350	-	-
07.234t056y-zzzz	1684	19,2	4020	-	-
07.234t057y-zzzz	1964	22,4	4690	-	-
07.234t058y-zzzz	2244	25,6	5360	-	-
07.234t059y-zzzz	2524	28,8	6030	-	-
07.234t050y-zzzz	2804	32,0	6700	-	-
07.234t152y-zzzz *	564	6,4	1340	-	EM
07.234t153y-zzzz *	844	9,6	2010	-	EM
07.234t154y-zzzz	1124	12,8	2680	-	EM
07.234t155y-zzzz	1404	16,0	3350	-	EM
07.234t156y-zzzz	1684	19,2	4020	-	EM
07.234t157y-zzzz	1964	22,4	4690	-	EM
07.234t158y-zzzz	2244	25,6	5360	-	EM
07.234t159y-zzzz	2524	28,8	6030	-	EM
07.234t150y-zzzz	2804	32,0	6700	-	EM
07.234t452y-zzzz	564	6,4	1340	dim	-
07.234t453y-zzzz	844	9,6	2010	dim	-
07.234t454y-zzzz	1124	12,8	2680	dim	-
07.234t455y-zzzz	1404	16,0	3350	dim	-
07.234t456y-zzzz	1684	19,2	4020	dim	-
07.234t457y-zzzz	1964	22,4	4690	dim	-
07.234t458y-zzzz	2244	25,6	5360	dim	-
07.234t459y-zzzz	2524	28,8	6030	dim	-
07.234t450y-zzzz	2804	32,0	6700	dim	-
07.234t552y-zzzz *	564	6,4	1340	dim	EM
07.234t553y-zzzz *	844	9,6	2010	dim	EM
07.234t554y-zzzz	1124	12,8	2680	dim	EM
07.234t555y-zzzz	1404	16,0	3350	dim	EM
07.234t556y-zzzz	1684	19,2	4020	dim	EM
07.234t557y-zzzz	1964	22,4	4690	dim	EM
07.234t558y-zzzz	2244	25,6	5360	dim	EM
07.234t559y-zzzz	2524	28,8	6030	dim	EM
07.234t550y-zzzz	2804	32,0	6700	dim	EM

t= diffusers

0= satin diffuser

y= colour temperature

3= 3000K

4= 4000K

2700K on request

zzzz= colour

9999= any RAL colour

info



dimmmable version DALI/TD
1-10V on request

DALI luminaire with EM → EM = DALI

RECESSED LUMINAIRES

REKTA 30 DAMPA




direct lighting



UGR
<19



VDT



*Driver and emergency module are placed in a separate box for 564 and 844mm profiles.
Max cable length between box and profile is 0,5m.

LOW lumen output

code	A	watt excl. driver	gross lumen	dim	emergency
07.234t012y-zzzz	564	9,0	1640	-	-
07.234t013y-zzzz	844	13,5	2460	-	-
07.234t014y-zzzz	1124	18,0	3280	-	-
07.234t015y-zzzz	1404	22,5	4100	-	-
07.234t016y-zzzz	1684	27,0	4920	-	-
07.234t017y-zzzz	1964	31,5	5740	-	-
07.234t018y-zzzz	2244	36,0	6560	-	-
07.234t019y-zzzz	2524	40,5	7380	-	-
07.234t010y-zzzz	2804	45,0	8200	-	-
07.234t112y-zzzz *	564	9,0	1640	-	EM
07.234t113y-zzzz *	844	13,5	2460	-	EM
07.234t114y-zzzz	1124	18,0	3280	-	EM
07.234t115y-zzzz	1404	22,5	4100	-	EM
07.234t116y-zzzz	1684	27,0	4920	-	EM
07.234t117y-zzzz	1964	31,5	5740	-	EM
07.234t118y-zzzz	2244	36,0	6560	-	EM
07.234t119y-zzzz	2524	40,5	7380	-	EM
07.234t110y-zzzz	2804	45,0	8200	-	EM
07.234t412y-zzzz	564	9,0	1640	dim	-
07.234t413y-zzzz	844	13,5	2460	dim	-
07.234t414y-zzzz	1124	18,0	3280	dim	-
07.234t415y-zzzz	1404	22,5	4100	dim	-
07.234t416y-zzzz	1684	27,0	4920	dim	-
07.234t417y-zzzz	1964	31,5	5740	dim	-
07.234t418y-zzzz	2244	36,0	6560	dim	-
07.234t419y-zzzz	2524	40,5	7380	dim	-
07.234t410y-zzzz	2804	45,0	8200	dim	-
07.234t512y-zzzz *	564	9,0	1640	dim	EM
07.234t513y-zzzz *	844	13,5	2460	dim	EM
07.234t514y-zzzz	1124	18,0	3280	dim	EM
07.234t515y-zzzz	1404	22,5	4100	dim	EM
07.234t516y-zzzz	1684	27,0	4920	dim	EM
07.234t517y-zzzz	1964	31,5	5740	dim	EM
07.234t518y-zzzz	2244	36,0	6560	dim	EM
07.234t519y-zzzz	2524	40,5	7380	dim	EM
07.234t510y-zzzz	2804	45,0	8200	dim	EM

t= diffusers

2= VDT louvre

y= colour temperature

3= 3000K

4= 4000K

2700K on request

zzzz= colour

9999= any RAL colour

info



dimmmable version DALI/TD
1-10V on request

DALI luminaire with EM → EM = DALI

RECESSED LUMINAIRES






SDC Office Ballerup, Denmark


MOUNTING SCHEME

- = upper profile Rekta 30x60 ■ = end caps and brackets — = distance between carrier profiles of DAMPA ceiling
- = lower profile Rekta 30x30 ⚡ = carrier profiles of DAMPA ceiling or distance between end cap and carrier profile of DAMPA ceiling

in combination with VDT louvre

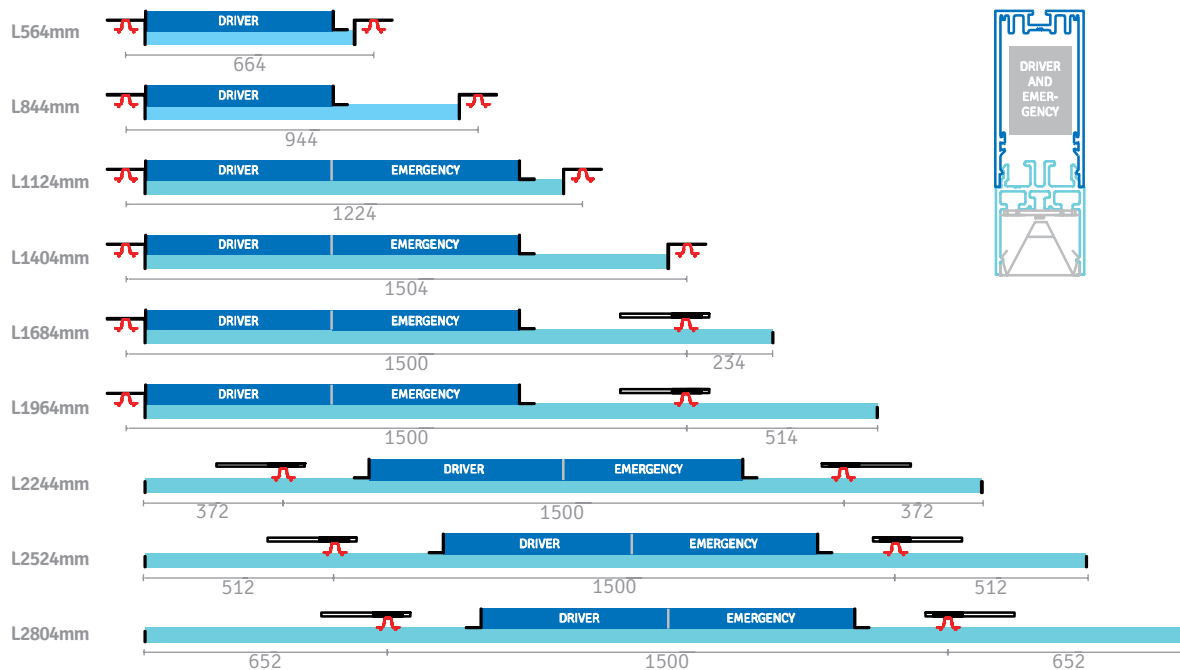

in combination with satin LED diffuser

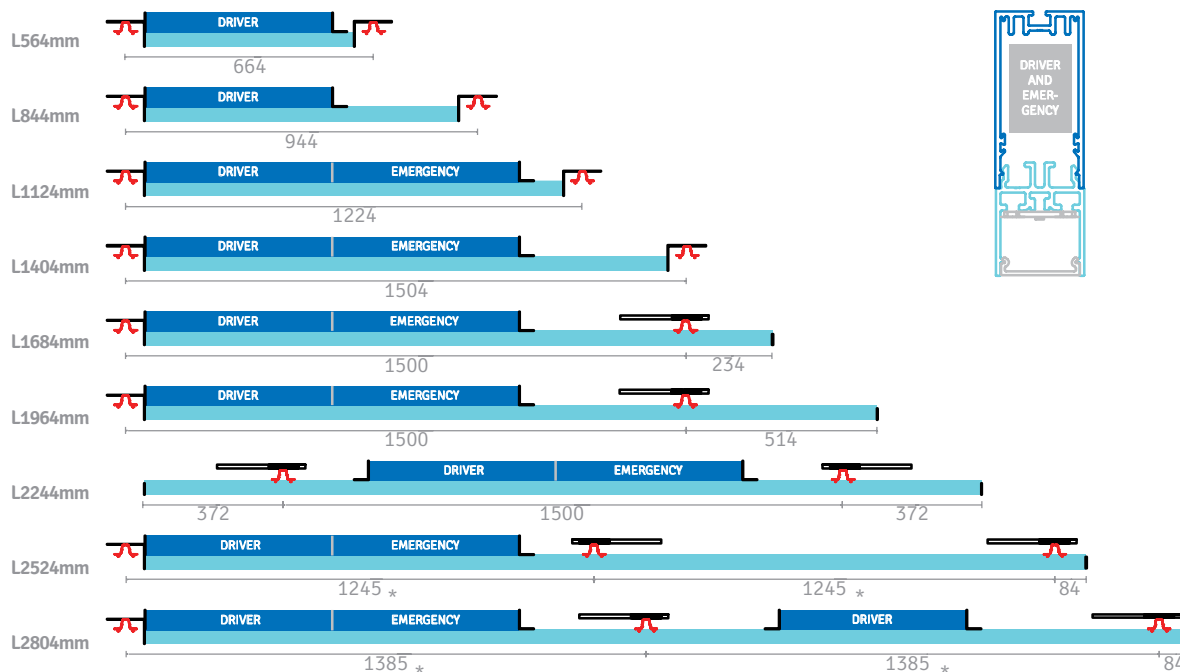



Abetec Zele, Belgium







ABS Bouwteam Sint-Denijs-Westrem, Belgium

System-One ApS
Kongevej 200, 2830 Virum, Denmark
T. 44 44 44 75
Info@system-one.dk
www.system-one.dk

