

I(P)GS-0208GSFP

8 10/100/1000T + 2 1000M SFP (8 PoE at/af) Industrial Unmanaged Switch ; Optional 12/24V input model

- Support IEEE802.3at/af up to 30W per port
- PoE model: Dual 9.5V~56VDC input (12V model); 9~36VDC (24V model); 44V~56VDC input (48V model)
- Non-PoE model: dual 9.5V~60VDC input (12V model); 9~36VDC (24V model)
- E-marking certificate for vehicle application
Only 24VDC input system is applicable for E-mark approval
- Max PoE budget 240W at 48V, 120W at 24V, 80W at 12V input
- Relay alarm output system events



OVERVIEW

Lantech I(P)GS-0208GSFP is a high performance all Gigabit switch with 8 10/100/1000T + 2x 1000M SFP (w/8 PoE 802.3af/at ports).

Dual 48V or 12V input with max PoE budget; Ethernet power input galvanic isolation

Equipped with DC 12~48V redundant input power, the Lantech IPGS-0208GSFP-12V is able to boost input voltage from 12V to 48V then feed each PoE port up to 15.4Watts/30Watts with total PoE power budget 80W at 12V, 120W at 24V input or 240W at 48V input.

Galvanic isolation between power input and Ethernet power system, preventing cabling and grounding incidents from damaging the Ethernet switch.

High reliability and extended working temperature

Lantech I(P)GS-0208GSFP provides $\pm 2000V$ EFT and $\pm 6000V$ ESD protection, which can reduce unstable situation caused by power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

The -E model can be used in extreme environments with an operating temperature range of $-40^{\circ}C$ to $75^{\circ}C$.


The E-marking certificate makes it the most suitable PoE switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 12V but has demand of IP surveillance or VoIP applications. Only 24VDC input system is applicable for E-mark* approval.

FEATURES & BENEFITS

- | | |
|---|---|
| ■ 8 10/100/1000T + 2 1000M SFP (w/8 PoE 802.3af/at ports) (Total 10 Ports Switch) | ■ PoE budget 80W at 12V input, 120W at 24V input |
| ■ Embedded 8 PoE ports IEEE802.3af/at function to feed power up to 30W@54V; 15W @ 48V per port for active operation | ■ Dual 45V~56VDC power input for 48V model with PoE budget 240W |
| ■ Dual 9.5V~56VDC power input for 12V model with | ■ Dual 9V~36VDC power input for 24V model ; 120W at 24V input |
| | ■ Dual 9.5V~60VDC power input for 12V model and |

- dual 9V~36VDC power input for 24V model without PoE
- Back-plane (Switching Fabric): 20Gbps
- 10 KB Jumbo frame supported on all ports
- Provides EFT protection ± 2000 VDC for power line.
- Supports ± 6000 VDC Ethernet ESD protection
- Only 24VDC input system is applicable for E-mark approval
- Relay alarm output system events
- IP30 metal housing with DIN rail and Wall-mount** design

DIMENSIONS (unit=mm)

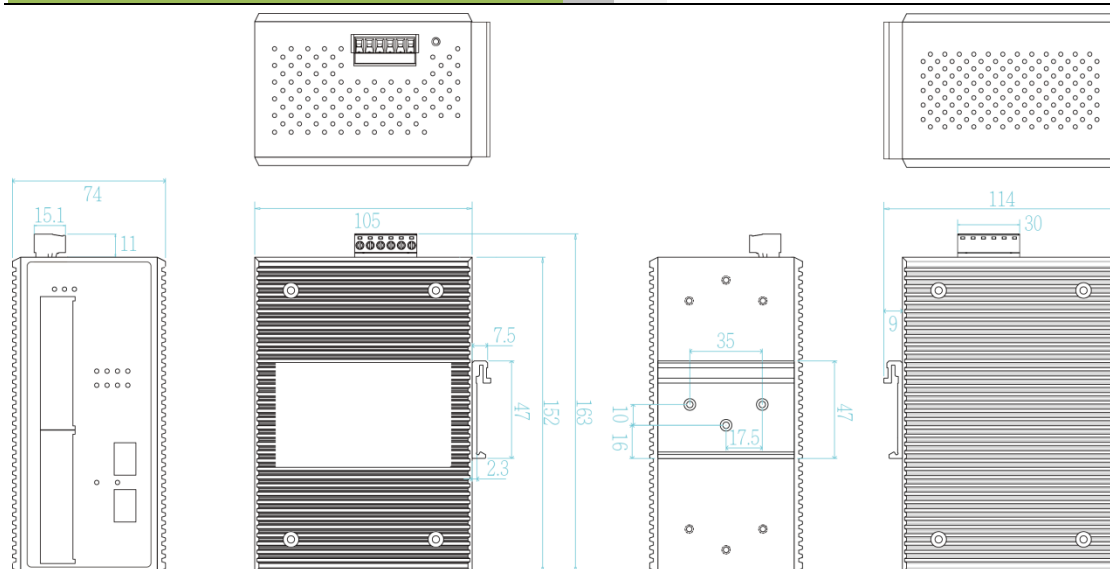

SPECIFICATION

Hardware Specification			
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T Ethernet IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet	Protocol	CSMA/CD
Switch Architecture	Back-plane (Switching Fabric): 20Gbps	LED	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) Ethernet port: Link/Activity (Green) PoE: Link/Act (Green); Mini-GBIC: Link/Activity (Green)
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port	Operating Humidity	5% ~ 95% (Non-condensing)
Mac Address	16K MAC address table	Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F (E model)
Jumbo frame	10 KB	Storage Temperature	-40°C~85°C / -40°F~185°F
Connectors	10/100/1000T: 8 x ports RJ-45 with Auto MDI/MDI-X function SFP port: 2 x 1000M Power & P-Fail connector: 1 x 6-pole terminal block	Power Supply	PoE model: 9~36VDC (24V model); 45~56VDC(48V model); 9.5V~56VDC(12V model) Non-PoE model: 9.5~60VDC (12V model); 9~36VDC (24V model);
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	PoE Budget	80W at 12V input; 120W at 24V input(12V model) 100W for 9~36VDC at 24V input (24V model) 240W for 45~56VDC at 48V input (48V model) (50~57VDC input is recommended for 802.3at 30W applications) Higher PoE budget can be applied upon request. **
Optical Cable	1.25Gbps: Multi mode: 0 to 550 m, 850 nm (50/125 μ m); 0 to 2 km, 1310 nm (50/125 μ m) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μ m); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μ m) WDM 1.25Gbps: Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 μ m); 0 to 80 km, 1490 nm (9/125 μ m); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μ m)	PoE pin assignment	RJ-45 port # 1~#8 support IEEE 802.3at/af End-point, Alternative A mode. Per port provides 30W at 54~56VDC/15W at 48V~56VDC. Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.
		Power Consumption	10W

Case Dimension	Metal case. IP-30, 74 (W) x 114 (D) x 152 (H) mm		CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3
Weight	900 g		
Installation	DIN Rail and Wall Mount** Design	Safety	EN62368 (LVD)
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V	Stability Testing	IEC60068-2-31 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
EMI & EMS	EN 55011:2016 FCC Part 15 Class A IEC/EN61000-6-2 CE EN55032 Class A CE EN55024: CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3	MTBF	12V: 813,050 (Hrs) 48V: 850,918 (Hrs)
		Vehicle certificate	E13 marking (-24V model)
		Warranty	5 years
			*Future Release **Optional

ORDERING INFORMATION

- **IPGS-0208GSFP-48V.....P/N: 8350-9941**
8 10/100/1000T + 2 1000M SFP w/8 PoE Mode A 802.3at/af 30W Industrial Switch w/Ethernet galvanic isolation; dual 45~56VDC input; -20°C to 60°C
- **IPGS-0208GSFP-48V-E.....P/N: 8350-9951**
8 10/100/1000T + 2 1000M SFP w/8 PoE Mode A 802.3at/af 30W Industrial Switch w/Ethernet galvanic isolation; dual 45~56VDC input; -40°C to 75°C
- **IPGS-0208GSFP-12V.....P/N: 8350-9961**
8 10/100/1000T + 2 1000M SFP w/8 PoE Mode A 802.3at/af 30W Industrial Switch w/Ethernet galvanic isolation, dual 9.5V~56VDC input; -20°C to 60°C
- **IPGS-0208GSFP-12V-E.....P/N: 8350-9971**
8 10/100/1000T + 2 1000M SFP w/8 PoE Mode A 802.3at/af 30W Industrial Switch w/Ethernet galvanic isolation, dual 9.5V~56VDC input, -40°C to 75°C
- **IPGS-0208GSFP-24V.....P/N: 8350-9962**
8 10/100/1000T + 2 1000M SFP w/8 PoE Mode A 802.3at/af 30W Industrial Switch w/Ethernet galvanic isolation, dual 9V~36VDC input; -20°C to 60°C
- **IPGS-0208GSFP-24V-E.....P/N: 8350-9972**
8 10/100/1000T + 2 1000M SFP w/8 PoE Mode A 802.3at/af 30W Industrial Switch w/Ethernet galvanic isolation, dual 9V~36VDC input, -40°C to 75°C
- **IGS-0208GSFP-12V.....P/N: 8350-9942**
8 10/100/1000T + 2 1000M SFP Industrial Switch w/Ethernet galvanic isolation; dual 9.5~60VDC input; -20°C to 60°C
- **IGS-0208GSFP-12V-E.....P/N: 8350-9943**
8 10/100/1000T + 2 1000M SFP Industrial Switch w/Ethernet galvanic isolation; dual 9.5~60VDC input; -40°C to 75°C
- **IGS-0208GSFP-24V.....P/N: 8350-9944**
8 10/100/1000T + 2 1000M SFP Industrial Switch w/Ethernet galvanic isolation; dual 9~36VDC input; -20°C to 60°C
- **IGS-0208GSFP-24V-E.....P/N: 8350-9945**
8 10/100/1000T + 2 1000M SFP Industrial Switch w/Ethernet galvanic isolation; dual 9~36VDC input; -40°C to 75°C

OPTIONAL ACCESSORIES

DIN Rail Power

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Mini GBIC (SFP)

- | | | | |
|------------------------|--|-----------------------|--|
| ■ 8330-162D-V1 | MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver | ■ 8330-168-V1 | MINI GBIC 10/100/1000T (100m) Transceiver |
| ■ 8330-163D-V1 | MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver | ■ 8330-197D-V1 | 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) |
| ■ 8330-165D-V1 | MINI GBIC 1000LX (LC/SM/10KM) Transceiver | ■ 8330-198D-V1 | 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) |
| ■ 8340-0591D-V1 | MINI GBIC 1000LHX (LC/SM/40KM) Transceiver | ■ 8330-195D-V1 | 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310) |
| ■ 8330-166D-V1 | MINI GBIC 1000XD (LC/SM/50KM) Transceiver | ■ 8330-196D-V1 | 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) |
| ■ 8330-169D-V1 | MINI GBIC 1000XD (LC/SM/60KM) Transceiver | ■ 8330-188D-V1 | 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) |
| ■ 8330-167D-V1 | MINI GBIC 1000ZX (LC/SM/80KM) Transceiver | | |
| ■ 8330-170D-V1 | MINI GBIC 1000EZ (LC/SM/120KM) Transceiver | | |

■ 8330-189D-V1	1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550)	■ 8330-181D-V1	1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310)
■ 8330-186D-V1	1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310)	■ 8330-183D-V1	1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550)
■ 8330-187D-V1	1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550)	■ 8330-184D-V1	1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490)
■ 8330-180D-V1	1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310)	■ 8330-185D-V1	1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550)
■ 8330-182D-V1	1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550)	All SFP# ended with D are with DDM function	

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 12 AUG 2025
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.