

# IGS-5408DSFP

8 10/100/1000T + 4 100/1000M SFP L2+ Industrial Managed Ethernet Switch

## w/ Enhanced G.8032 Ring

- Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode, enhanced mode, train mode, multi-VLAN and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 16MSTI /RSTP ; support MRP ring
- Miss-wiring avoidance & Node failure protection
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values\*\*\*, Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; DHCP Snooping; Port based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH v2/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3, TACACS+\*\*, QinQ
- Protocol based VLAN ; IPv4 Subnet based VLAN
- Optional Environmental Monitoring\*\* for temp., voltage, current
- USB port to backup, restore the configuration file and upgrade firmware



## OVERVIEW

Lantech IGS-5408DSFP is a high performance L2+ (Gigabit uplink) switch with 8 10/100/1000T + 4 100/1000M SFP which provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports train ring, enhanced mode, multiple VLAN mode with easy configuration. The comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, TACACS+\*\*, SSH v2/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ are supported and also required in large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoworks to detect the switch info and show on L2 map topology.

### Miss-wiring avoidance, Loop protection, Node failure protection

The IGS-5408DSFP also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IGS-5408DSFP is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

### DHCP option 82 & Port based, Mac based DHCP, Option66, IPv6 DHCP server

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Basic IPv6 DHCP service can be supported.

### User friendly GUI, Auto topology drawing

The user friendly UI, innovative auto topology drawing and topology demo makes IGS-5408DSFP much easier to get hands-on. The IGS-5408DSFP supports DMI interface that can correspond with DDM SFPs (Digital diagnostic monitor) to display the five parameters in Lantech's UI, including optical output power, input power, temperature, laser bias current and transceiver supply voltage\*\*\*. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI enables professional engineer to configure setting by command line.

### Enhanced G.8032 ring, 16 MSTI MSTP; MRP ring

Lantech IGS-5408DSFP features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under

enhanced ring), train ring, basic ring, multiple-VLAN ring and auto-ring by easy setup than others. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows RSTP over VLAN for redundant links with 16 MSTI.

MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

#### **QoS by VLAN for legacy device**

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

#### ***QinQ, QoS and GVRP supported***

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

#### ***IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection***

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

#### ***802.1X security by MAC address***

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

#### ***Editable configuration file; USB port for configuration upload & download***

The configuration file of Lantech IGS-5408DSFP can be exported and edited with word processor for the other switches configuration with ease. The factory reset button can restore the setting back to factory default and built-in watchdog design

can automatically reboot the switch when CPU is found dead.

The built-in USB port can have configuration upload & download by USB dongle.

#### ***Event log & message; 2 DI + 2DO***

In case of event, the IGS-5408DSFP is able to send an email to pre-defined addresses as well as SNMP Traps out immediately. It provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

#### ***Optional environmental monitoring for switch inside information (-M model)***

The environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps, email when abnormal

#### ***Wide input range 18~56VDC; EFT and ESD protection***

The Lantech IGS-5408DSFP is designed with dual power supply at 24/48VDC. Featured with relay contact alarm function, the IGS-5408DSFP is able to connect with alarm system in case of power failure. The IGS-5408DSFP also provides ±2000V EFT/SURGE and ±4000 VDC (Contact) / ±8000 VDC (Air) Ethernet ESD protection, which can reduce unstable situation caused by power line and Ethernet.

#### ***Industrial hardened design for extended temperature operation***

Lantech IGS-5408DSFP features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.


The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

## **FEATURES & BENEFITS**

- **8 10/100/1000T + 4 100/1000M SFP (Total 12 Ports Switch)**
- **Back-plane (Switching Fabric): 24Gbps**
- **16K MAC address table**
- **DDM to support SFP diagnostic function\*\*\***
  - *Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance*
  - *Support various ring/chain topologies, including train ring, enhanced ring, basic ring, auto ring & multiple VLAN ring*
  - *Enhanced G.8032 ring configuration with ease*

- *Auto ring configuration(auto mode) for single ring*
- *Ring covers multicast on different ports*
- **Ring storm control to cut off RPL line when RX threshold is over 85%**
- **Dual DC input from 18V~56VDC**
- **Provides EFT protection  $\pm 2000$  VDC for power line.**
- **Supports  $\pm 4000$  VDC (Contact) and  $\pm 8000$  VDC (Air) Ethernet ESD protection**
- **LACP load balancing to distribute the load\***
- **Built-in RTC (Real Time Clock) to keep track of time**
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP VLAN redundancy with 16 MSTI**
- **4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS**
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console**
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Option 66; DHCP Snooping; basic IPv6 DHCP server**
- **Mac based DHCP server to assign IP address**
- **MLD Snooping for IPv6 Multicast stream**
- **Bandwidth Control**
  - *Ingress packet filter and egress rate limit*
  - *Broadcast/multicast packet filter control*
- **Relay alarm output system events**
- **Miss-wiring avoidance**
  - *LED indicator*
- **Node failure protection**
  - *Ensure the switches in a ring to survive after power breakout is back*
  - *The status can be shown in NMS when each switch is back*
- **TFTP/HTTP firmware upgrade; USB for edited restoration and auto backup**
- **System Event Log, SMTP\*\* Email alert and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
  - *SSL/SSH v2/INGRESS/EGRESS ACL L2/L3*
  - *MAC address table: MAC address entries/Filter/MAC-Port binding*
  - *IP Security: IP address security management to prevent unauthorized intruder.*
  - *Management access control with priority*
  - *Login Security: IEEE802.1X/RADIUS*
  - *HTTPS for secure access to the web interface*
  - *TACACS+\*\**
- **Static multicast forwarding forward/reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **IGMP router port to assign query in ring for reversed multicast video flow**
- **Multicast VLAN registration\* for metro video**
- **IGMPv1,v2,v3 with Query mode for multimedia; GMRP\***
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch CPU is found dead**
- **Diagnostic including Ping / DDM information**
- **Optional environmental monitoring for system input voltage, current, ambient temperature**
- **Supports DIDO (Digital Input/Digital Output)**
- **Configuration backup and restoration**
  - *Supports editable configuration file for system quick installation*
  - *USB port for upload / download configuration by USB dongle*
- **TFTP/HTTP firmware upgrade**
- **IP30 metal housing with DIN rail and Wall-mount\*\* design**

## DIMENSIONS (unit=mm)

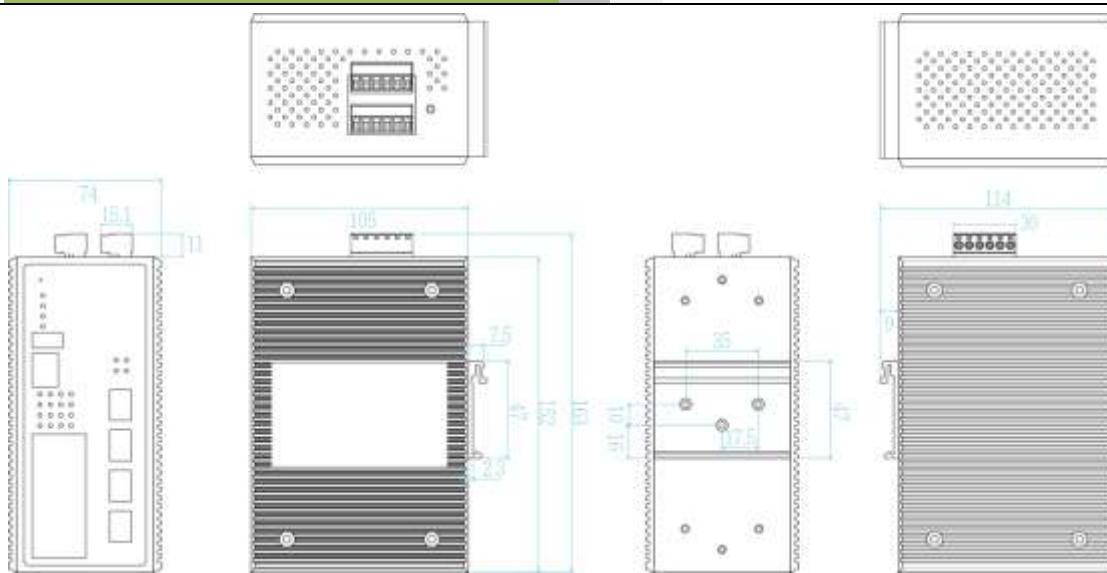

## SPECIFICATION

## Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T Ethernet IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag	<b>125Mbps:</b> Multi mode: 0 to 2 km/ 5 km, 1310 nm (62.5/125 $\mu$ m) Single mode: 0 to 30 km, 1310 nm (62.5/125 $\mu$ m) <b>WDM 1.25Gbps:</b> Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 $\mu$ m); 0 to 80 km, 1490 nm (9/125 $\mu$ m); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 $\mu$ m) <b>WDM 125Mbps:</b> Single mode: 0 to 20 km/ 40 km/ 60 km/ 80 km, 1310 nm (9/125 $\mu$ m); 0 to 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 $\mu$ m)
Switch Architecture	Back-plane (Switching Fabric): 24Gbps	LED
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port	Ethernet port: Link/Activity (Green), Speed (Green); Mini-GBIC: Link/Activity (Green) R.M. indicator (Green)
Mac Address	16K MAC address table	DI/DO
Jumbo frame	10KB	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA
Connectors	10/100/1000T: 8 x ports RJ-45 with Auto MDI/MDI-X function Mini-GBIC: 4 x 100/1000 SFP socket with DDM RS-232 connector: RJ-45 type USB for configuration restore/backup Power & Relay connector: 1 x 6-pole terminal block DIDO : 1 x 6-pole terminal block	Operating Humidity Operating Temperature Storage Temperature Power Supply Power Consumption
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	5% ~ 95% (Non-condensing) -20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F (E model) -40°C~85°C / -40°F~185°F Dual 18~56VDC (Standard model) 10W
Optical Cable	<b>1.25Gbps:</b> Multi mode: 0 to 550 m, 850 nm (50/125 $\mu$ m); 0 to 2 km, 1310 nm (50/125 $\mu$ m) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 $\mu$ m); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 $\mu$ m)	Case Dimension Weight Installation EMI & EMS Stability Testing

Safety	IEC60068-2-27 (Shock), IEC60068-2-64 (Vibration)	interface TACACS+** for Authentication	
MTBF	635,104 hours	IGMP	Support IGMP snooping v1,v2,v3; 1024 multicast groups; IGMP router port ; IGMP query; GMRP*,
Warranty	5 years	Static MAC-Port Bridge	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
<b>Software Specification</b>			
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI	Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
SNMP MIB	RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB* RFC 1573 IF MIB Partial RFC 1757 RMON, Private MIB	RTC	Built-in Real Time Clock to keep track of time always
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single mode) Support various ring/chain topologies Includes train ring, auto ring, basic single ring, enhanced ring, multiple-VLAN ring Enhanced G.8032 ring configuration with ease. Protect multicast & unicast data	Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
User friendly UI	1. Auto topology drawing 2. Topology demo 3. DDM threshold with dB values*** 4. Complete CLI for professional setting	System Log	Supports System log record and remote system log server
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups	SMTP**	Supports SMTP** Server and 8 e-mail accounts for receiving event alert
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN	Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
CDP	Cisco Discovery Protocol for topology mapping	Protection	1. Miss-wiring avoidance 2. Node failure protection 3. Loop protection 4. Ring Storm control cut off RPL line when threshold is over 85%
Environmental Monitoring**	System status for input voltage, current and ambient temperature to be shown in GUI and sent alerting if any abnormal status (-M models)	SNMP Trap	Up to 10 trap stations; trap types including:  1. Device cold start 2. Authorization failure 3. Port link up/link down 4. DI/DO open/close 5. Topology change(ITU ring) 6. Power failure 7. Environmental abnormal**
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096) GVRP, QinQ, Protocol based VLAN; IPv4 Subnet based VLAN	DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Option 66; DHCP Snooping; basic IPv6 DHCP server
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree	Mac based DHCP Server	Assign IP address by Mac
Quality of Service	The quality of service determined by port / CoS / ToS / VLAN / 61375-3-4	DNS	Provide DNS client feature
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues	Diagnostic	Support Ping and DDM information
MLD Snooping	Support IPv6 Multicast stream	SNTP	Supports SNTP to synchronize system clock in Internet
Login Security	Supports IEEE802.1X Authentication/RADIUS	Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"		
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Management access control with priority Ingress/Egress ACL L2/L3 SSL/ SSH v2 for Management HTTPS for secure access to the web		

Configuration upload and download	Supports text configuration file for system quick installation; Support factory reset button to restore all settings back to factory default; USB port for upload/download configuration by USB dongle	User friendly UI	1. Auto topology drawing 2. Topology demo 3. DDM threshold with dB values*** 4. Complete CLI for professional setting
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI	Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups
SNMP MIB	RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB* RFC 1573 IF MIB Partial RFC 1757 RMON, Private MIB	LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (single mode) Support various ring/chain topologies Includes train ring, auto ring, basic single ring, enhanced ring, multiple-VLAN ring Enhanced G.8032 ring configuration with ease. Protect multicast & unicast data	CDP	Cisco Discovery Protocol for topology mapping
			*Future release **Optional ***Optional DDM SFP required

## ORDERING INFORMATION

- IGS-5408DSFP.....P/N: 8350-820**  
8 10/100/1000T + 4 100/1000M SFP L2+ Industrial Managed Ethernet Switch; -20°C to 60°C; Dual 18~56VDC
- IGS-5408DSFP-E.....P/N: 8350-821**  
8 10/100/1000T + 4 100/1000M SFP L2+ Industrial Managed Ethernet Switch; -40°C to 75°C; Dual 18~56VDC
- IGS-5408DSFP-M.....P/N: 8350-822**  
8 10/100/1000T + 4 100/1000M SFP L2+ Industrial Managed Ethernet Switch w/ environmental monitoring; -20°C to 60°C; Dual 18~56VDC
- IGS-5408DSFP-M-E.....P/N: 8350-823**  
8 10/100/1000T + 4 100/1000M SFP L2+ Industrial Managed Ethernet Switch w/ environmental monitoring; -40°C to 75°C; Dual 18~56VDC

## OPTIONAL ACCESSORIES

### DIN Rail Power

- MDR-40 Series** 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- MDR-20 Series** 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

### Mini GBIC (SFP)

<b>8330-162D-V1</b>	MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver	<b>8330-187D-V1</b>	1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550)
<b>8330-163D-V1</b>	MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver	<b>8330-180D-V1</b>	1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310)
<b>8330-165D-V1</b>	MINI GBIC 1000LX (LC/SM/10KM) Transceiver	<b>8330-182D-V1</b>	1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550)
<b>8340-0591D-V1</b>	MINI GBIC 1000LHX (LC/SM/40KM) Transceiver	<b>8330-181D-V1</b>	1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310)
<b>8330-166D-V1</b>	MINI GBIC 1000XD (LC/SM/50KM) Transceiver	<b>8330-183D-V1</b>	1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550)
<b>8330-169D-V1</b>	MINI GBIC 1000XD (LC/SM/60KM) Transceiver	<b>8330-184D-V1</b>	1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490)
<b>8330-167D-V1</b>	MINI GBIC 1000ZX (LC/SM/80KM) Transceiver	<b>8330-185D-V1</b>	1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550)
<b>8330-170D-V1</b>	MINI GBIC 1000EZX (LC/SM/120KM) Transceiver	<b>8330-071D-V1</b>	125Mbps BiDi SFP 2KM (WDM 1310) Transceiver
<b>8330-168D-V1</b>	MINI GBIC 10/100/1000T (100m) Transceiver	<b>8330-072D-V1</b>	125Mbps BiDi SFP 2KM (WDM 1550) Transceiver
<b>8330-060D-V1</b>	MINI GBIC 100Base (LC/MM/2KM) Transceiver	<b>8330-069D-V1</b>	125Mbps BiDi SFP 20KM (WDM 1310) Transceiver
<b>8330-065D-V1</b>	MINI GBIC 100Base (LC/MM/5KM) Transceiver	<b>8330-068D-V1</b>	125Mbps BiDi SFP 20KM (WDM 1550) Transceiver
<b>8330-061D-V1</b>	MINI GBIC 100Base (LC/SM/30KM) Transceiver	<b>8330-080D-V1</b>	125Mbps BiDi SFP 40KM (WDM 1310) Transceiver
<b>8330-197D-V1</b>	1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310)	<b>8330-082D-V1</b>	125Mbps BiDi SFP 40KM (WDM 1550) Transceiver
<b>8330-198D-V1</b>	1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550)	<b>8330-081D-V1</b>	125Mbps BiDi SFP 60KM (WDM 1310) Transceiver
<b>8330-195D-V1</b>	1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310)	<b>8330-083D-V1</b>	125Mbps BiDi SFP 60KM (WDM 1550) Transceiver
<b>8330-196D-V1</b>	1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550)	<b>8330-084D-V1</b>	125Mbps BiDi SFP 80KM (WDM 1310) Transceiver
<b>8330-188D-V1</b>	1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310)	<b>8330-085D-V1</b>	125Mbps BiDi SFP 80KM (WDM 1550) Transceiver
<b>8330-189D-V1</b>	1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550)	<b>8330-191D-V1</b>	Dual Speed SFP 100M/1000M-LX 10KM Transceiver
<b>8330-186D-V1</b>	1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310)		

All SFP# ended with D are with DDM function

**Lantech Communications Global Inc.**

[www.lantechcom.tw](http://www.lantechcom.tw)  
[info@lantechcom.tw](mailto:info@lantechcom.tw)

© 2025 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 05 AUG 2025.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.