

IGS-5816-2P

8 10/100/1000T + 16 DualSpeed SFP Industrial L2+ Switch w/ enhanced G.8032 Ring

- Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode, enhanced mode, train mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 16 MSTI /RSTP ; support MRP ring
- Support dual power redundancy AC&DC
- Miss-wiring avoidance & Node failure protection
- User friendly UI, including auto topology drawing and DDM threshold monitoring with dB values***; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82 for Port/VLAN based DHCP distribution, DHCP Snooping; Mac based DHCP server, QoS by VLAN, SSH v2/SSL, HTTPS, TACACS+**, INGRESS/EGRESS ACL L2/L3
- Protocol based VLAN; IPv4 Subnet based VLAN
- Environmental Monitoring for temp., voltage & current
- USB slot for edited restoration and auto backup



OVERVIEW

Lantech IGS-5816-2P is a high performance L2 + managed industrial switch which provides L2 wire speed and advanced security function for network aggregation and backbone deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms including train ring, enhanced mode for easy configuration, comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, SSH v2/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, TACACS+**, QinQ (double tag VLAN) which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoworks to detect the switch info and show on L2 map topology.

Miss-wiring avoidance, Loop protection, Node failure protection

The IGS-5816-2P also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IGS-5816-2P is able to alert with the LED indicator and send out an email or traps. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep

ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping, IPv6 DHCP server

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Basic IPv6 DHCP service can be supported.

Auto-provisioning for firmware/configuration update
The switch supports auto-provisioning for switch to auto-check the latest software image and configuration through TFTP server.

User friendly UI, Auto topology drawing, complete CLI

The user friendly UI, innovative auto topology drawing and topology demo makes IGS-5816-2P much easier to get hands-on. The switch also equips the RTC (real time clock) which can keep track of time always. The IGS-5816-2P supports DMI interface that can correspond with DDM SFPs (Digital

diagnostic monitor) to display the five parameters in Lantech's UI, including optical output power, input power, temperature, laser bias current and transceiver supply voltage***. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI enables professional engineer to configure setting by command line.

Enhanced G.8032 ring, 16 MSTI MSTP; MRP ring

Lantech IGS-5816-2P features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under enhanced ring), train ring, basic ring by easy setup than others. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows RSTP over Vlan for redundant links with 16 MSTI. MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

QinQ, QoS and GVRP supported

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

802.1X security by MAC address

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

Editable configuration file; Optional N-key auto backup, exported text file

The configuration file of Lantech IGS-5816-2P can be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. The factory reset button can restore the setting back to factory default and built-in watchdog

design can automatically reboot the switch when CPU is found dead. The USB slot allows user to backup/ restore configuration.

QoS by VLAN for legacy devices to tag with priority

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

Event log & message; 2 DI + 2DO

The IGS-5816-2P DIDO function can support additional open/close physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the switch was moved or stolen. In case of events, the IGS-5816-2P will immediately send an email to pre-defined addresses as well as SNMP Traps out. It provides 2DI and 2DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

Built-in environmental monitoring to show switch inside info

The built-in environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps and email when abnormal.

Various dual power conversions redundancy, high ESD protection

The Lantech IGS-5816-2P is designed with dual power redundancies with isolated 100~240VAC/120~370VDC power conversion and isolated 36~75VDC power conversion or with non-isolated 12~56VDC power module. Featured with relay contact alarm function, the IGS-5816-2P is able to connect with alarm system in case of power failure. The IGS-5816-2P also provides ±4000V EFT and ±8000V ESD protection, which can reduce unstable situation caused by power line and Ethernet.

Lantech IGS-5816-2P features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.


The IGS-5816-2P-E can be used in extreme environments with an operating temperature range of -40°C to 75°C.

FEATURES & BENEFITS

- **8 10/100/1000T + 16 Dual Speed SFP (Total 24 Ports Switch)**
- **Back-plane (Switching Fabric): 48Gbps**
- **System Interface/Performance**
 - 16K MAC Address Table
 - Backplane : 56Gbps
 - Dual isolated power conversions for 1600V DC(36V~75V)
 - Dual isolated power conversions for ±3000 V
- **(100~240VAC/120V~370VDC)**
 - Dual power supply terminal block for non-isolated power DC(12V~56V)
- **DDM to support SFP diagnostic function*****
 - Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance
- **10KB Jumbo frame supported on all ports**
- **User friendly UI, auto topology drawing, topology**

- **demo, complete CLI for professional setting**
- **Enhanced G.8032 Ring protection in 20ms < 256 switches**
 - *Support various ring/chain topologies, including train ring*
 - *Enhanced G.8032 ring configuration with ease*
 - *Auto ring configuration (auto mode) for single ring*
 - *Ring covers multicast on different ports*
- **Provides EFT protection ± 4000 VDC for power line.**
- **Supports ± 8000 VDC Ethernet ESD protection**
- **LACP load balancing to distribute the load***
- **Built-in RTC (Real Time Clock) to keep track of time**
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy**
- **4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS**
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console**
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; DHCP Snooping; Port based DHCP server; DHCP Option 66; basic IPv6 DHCP server**
- **Mac based DHCP server to assign IP address**
- **Bandwidth Control**
 - *Ingress packet filter and egress rate limit*
 - *Broadcast/multicast packet filter control*
- **Relay alarm output system events**
- **Miss-wiring avoidance**
 - *LED indicator*
 - *Email or traps notification*
- **Node failure protection**
 - *Ensure the switches in a ring to survive after power breakout is back*
 - *The status can be shown in NMS when each switch is back*
- **TFTP/HTTP firmware upgrade; USB for edited restoration and auto backup**
- **System Event Log and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
 - *SSL/SSH v2/INGRESS/EGRESS ACL L2/L3*
 - *MAC address table: MAC address entries/Filter/MAC-Port binding*
 - *IP Security: IP address security management to prevent unauthorized intruder.*
 - *Management access control with priority*
 - *TACACS+***
 - *Login Security: IEEE802.1X/RADIUS*
 - *HTTPS for secure access to the web interface*
- **Static multicast forwarding forward/reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **Multicast static route for non-IGMP camera to prevent flooding; IGMP router port to assign query in ring and for reversed multicast video flow**
- **Multicast VLAN registration* for metro video**
- **IGMPv1,v2,v3 with Query mode for multimedia; GMRP****
- **Factory reset button to restore setting to factory default**
- **Watchdog design to auto reboot switch CPU is found dead**
- **Diagnostic including Ping / DDM information**
- **MLD Snooping for IPv6 Multicast stream**
- **Environmental monitoring for system input voltage, current, ambient temperature**
- **Supports DIDO (Digital Input/Digital Output)**
- **IP30 metal housing with DIN rail and Wall-mount** design**
- **Auto Provision to verify switch firmware with the latest or certain version**

DIMENSIONS (unit=mm)

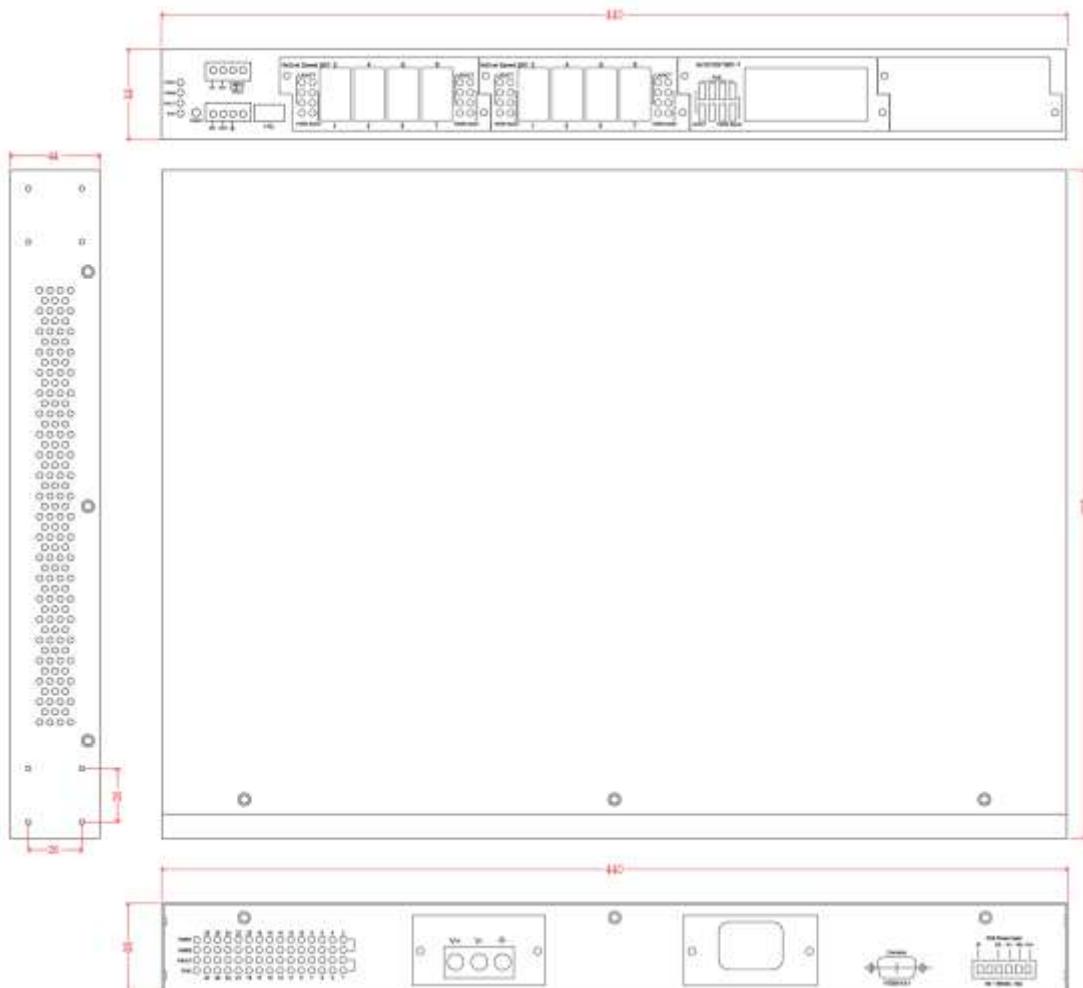

SPECIFICATION

Hardware Specification

IEEE Standards	Flash 128M Byte MAC Address 16K MAC address table Jumbo frame 10KB on all ports Connectors 8 10/100/1000T RJ-45 with auto MDI/MDI-X function 16 100M / 1000M Mini-GBIC : SFP sockets RS-232 console: Female DB-9 USB for automatic backup and restore DDM Conform to SFF-8472 to show diagnostic SFP with temperature, current, voltage, input and output power Protocol CSMA/CD LED Per unit: Power 1 (Green), Power 2 (Green), Alarm (Red) ,R.M (Green) Link/Activity (Green), Full duplex/collision(Yellow)), MINI GBIC (Link/Activity)(Green) Power Supply AC model: 100~240V AC IEC320 conversion X1 DC model: 12~56VDC INPUT X1 Additional power socket (optional): ■ 100-240VAC, 120-370VDC ■ 36-75VDC ■ 100-240VAC IEC320 ■ 12-56VDC Power Consumption Full load: 30W/ Unload: 13W Relay Alarm Provides one relay output for port breakdown, power
Switch Architecture	Back-plane (Switching Fabric): 48Gbps
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port
CPU	Marvell 800Mhz
RAM	256M Byte

	fail and alarm. Alarm Relay current carry ability: 1A @ DC24V		access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Management access control with priority Ingress/Egress ACL L2/L3 SSL/ SSH v2 for Management HTTPS for secure access to the web interface TACACS+** for Authentication
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA		
Case Dimension	19" Metal case,IP-30; 440mm(W)x325mm(D)x44mm(H)		
Weight	2.9 kgs		
Operating Humidity	5%~95% (Non-condensing)		
Operating Temperature	Standard: -20°C ~60°C -E model: -40°C ~75°C		
Storage Temperature	-40°C ~85°C		
EMI	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-4-11, CE EN55032 Class A, CE EN55024		
Safety	EN IEC 62368-1		
Stability Testing	IEC 60068-2-6: 2007 (Vibration) IEC 60068-2-27: 2008 (Shock)		
MTBF	830,455 hrs (standards: IEC 62380)		
Warranty	5 years		
Software Specification			
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI		
SNMP MIB	MIB MIBII SNMP MIB Bridge MIB IF MIB RMON MIB Private MIB		
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (basic mode) Support various ring/chain topologies Includes train ring Enhanced G.8032 ring configuration with ease		
User friendly UI	■ Auto topology drawing ■ Topology demo ■ DDM threshold monitoring with dB values*** ■ Complete CLI for professional setting		
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups/Maximum 24 trunk members		
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN		
CDP	Cisco Discovery Protocol for topology mapping		
Environmental Monitoring	System status for input voltage, current and ambient temperature to be shown in GUI and sent alerting if any abnormal status		
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP, QinQ, Protocol based VLAN, IPv4 Subnet based VLAN		
MLD Snooping	Support IPv6 Multicast stream		
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree		
Quality of Service	The quality of service determined by port / CoS / ToS / VLAN / 61375-3-4		
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues		
Login Security	Supports IEEE802.1X Authentication/RADIUS		*Future Release **Optional
Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"		***Optional DDM SFP required
Network Security	Support 10 IP addresses that have permission to		

ORDERING INFORMATION

For optional power supply, add +DC, +DCI, +AC, or +HV to the part number.

- **IGS-5816-2P-AC.....P/N: 8380-515**
8 10/100/1000T + 16 Dual SFP L2 plus Industrial Switch
Built-in 1x 100~240V AC IEC320 conversion + 1x optional power socket; -20°C to 60°C
- **IGS-5816-2P-DC.....P/N: 8380-516**
8 10/100/1000T + 16 Dual SFP L2 plus Industrial Switch
Built-in 1x 12~56V DC + 1x optional power socket; -20°C to 60°C
- **IGS-5816-2P-AC-E.....P/N: 8380-5151**
8 10/100/1000T + 16 Dual SFP L2 plus Industrial Switch
Built-in 1x 100~240V AC IEC320 conversion + 1x optional power socket; -40°C to 75°C
- **IGS-5816-2P-DC-E.....P/N: 8380-5161**
8 10/100/1000T + 16 Dual SFP L2 plus Industrial Switch
Built-in 1x 12~56V DC + 1x optional power socket; -40°C to 75°C

OPTIONAL ACCESSORIES

Power

EOTH000701

Isolation Power 100-240VAC, 120-370VDC 2.0A max, 47-63HZ



EOTH000702

Isolation Power conversion 36-75VDC, 2.5A



EOTH000703

Isolation Power 100-240VAC IEC320 socket, 2.0A max, 47-63HZ



EOTH000704

Power Input Module 12-56VDC, 2.5A



Mini GBIC (SFP)

- **8330-162D-V1** MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver
- **8330-163D-V1** MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver
- **8330-165D-V1** MINI GBIC 1000LX (LC/MM/10KM) Transceiver
- **8340-0591D-V1** MINI GBIC 1000LHX (LC/MM/40KM) Transceiver
- **8330-166D-V1** MINI GBIC 1000XD (LC/MM/50KM) Transceiver
- **8330-169D-V1** MINI GBIC 1000XD (LC/MM/60KM) Transceiver
- **8330-167D-V1** MINI GBIC 1000ZX (LC/MM/80KM) Transceiver
- **8330-170D-V1** MINI GBIC 1000EZX (LC/MM/120KM) Transceiver
- **8330-168-V1** MINI GBIC 10/100/1000T (100m) Transceiver
- **8330-060D-V1** MINI GBIC 100Base (LC/MM/2KM) Transceiver
- **8330-065D-V1** MINI GBIC 100Base (LC/MM/5KM) Transceiver

- **8330-061D-V1** MINI GBIC 100Base (LC/MM/30KM) Transceiver
- **8330-197D-V1** 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310)
- **8330-198D-V1** 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550)
- **8330-195D-V1** 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310)
- **8330-196D-V1** 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550)
- **8330-188D-V1** 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310)
- **8330-189D-V1** 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550)
- **8330-186D-V1** 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310)
- **8330-187D-V1** 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550)

■ 8330-180D-V1	1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310)
■ 8330-182D-V1	1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550)
■ 8330-181D-V1	1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310)
■ 8330-183D-V1	1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550)
■ 8330-184D-V1	1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490)
■ 8330-185D-V1	1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550)
■ 8330-071D-V1	125Mbps BiDi SFP 2KM (WDM 1310) Transceiver
■ 8330-072D-V1	125Mbps BiDi SFP 2KM (WDM 1550) Transceiver
■ 8330-069D-V1	125Mbps BiDi SFP 20KM (WDM 1310) Transceiver
■ 8330-068D-V1	125Mbps BiDi SFP 20KM (WDM 1550) Transceiver

■ 8330-080D-V1	125Mbps BiDi SFP 40KM (WDM 1310) Transceiver
■ 8330-082D-V1	125Mbps BiDi SFP 40KM (WDM 1550) Transceiver
■ 8330-081D-V1	125Mbps BiDi SFP 60KM (WDM 1310) Transceiver
■ 8330-083D-V1	125Mbps BiDi SFP 60KM (WDM 1550) Transceiver
■ 8330-084D-V1	125Mbps BiDi SFP 80KM (WDM 1310) Transceiver
■ 8330-085D-V1	125Mbps BiDi SFP 80KM (WDM 1550) Transceiver
■ 8330-191D-V1	Dual Speed SFP 100M/1000M-LX 10KM Transceiver

All SFP# ended with D are with DDM function

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 05 AUG 2025

The revise authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.