

## T(P)ES-L5416MGFT

16 10/100TX + 2 1G/2.5G Copper + 2 1G/2.5G Fiber Q-ODC OM3  
(w/8/10/16 PoE) EN50155 OS3 Managed Ethernet Switch; WVI /  
24V / 24TVI input



### OVERVIEW

Lantech T(P)ES-L5416MGFT is a high performance OS3 switch with 16 10/100TX + 2 1G/2.5G Copper + 2 1G/2.5G Fiber Q-ODC OM3. PoE model has 8/16 or 10 (incl. 8 copper + 2 uplink 1G/2.5G copper) PoE 802.3af/at ports Ethernet which provides advanced security function for network aggregation deployment.

#### **Up to 8/10/16 PoE at/af ports w/advanced PoE management and PoE galvanic isolation; Ethernet power input galvanic isolation**

Compliant with 802.3af/at standard, the PoE model is able to feed each PoE port up to 30 Watt at each PoE port for various IP PD devices. It supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE ports can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

Galvanic isolation between power input and Ethernet power system, also the PoE galvanic isolation provides insulation between the power input to PoE Ethernet ports, preventing cabling and grounding incidents from damaging the Ethernet switch. The efficiency of the galvanically decoupled voltage converters can reach above 90%.

#### **Lantech OS3 Platform with complete L2 management and upgradable optional L3 & communication protocols**

The switch runs Lantech OS3 platform which is powerful with complete Layer 2 management features and optional upgradable for future expansion, such as Layer 3 Lite, Layer 3, IEC61375-2-5 (ETBN), etc. To learn more about the Lantech OS3 Platform, please refer to **Lantech OS3/OS4 Software Datasheet** ([https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3\\_OS4.pdf](https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf))

**Enhanced cybersecurity features with IEC 62443-4-1 certification**

Lantech OS3 platform is designed with high standard of cybersecurity to prevent the threats from network attack such as DDoS attacks. To ensure the safety and reliability of communication networks, Lantech develops our products under strict international security standard and is certified with IEC 62443-4-1 network security standard. To learn more about Lantech cybersecurity software solution, please refer to **Lantech OS3/OS4 Software Datasheet** ([https://www.lantech.com.tw/global/eng/download/datasheet/D-OS3\\_OS4.pdf](https://www.lantech.com.tw/global/eng/download/datasheet/D-OS3_OS4.pdf))

**Miss-wiring avoidance, node failure protection, Loop protection**

The switch also embedded several features for strong and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, the switch being able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

**User friendly GUI, Auto topology drawing, Enhanced Environmental Monitoring**

The user-friendly UI, innovative auto topology drawing and topology demo makes the switch much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line. It supports enhanced environmental monitoring for actual input voltage, current, ambient temperature and total power load.

**Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN**

Lantech OS3 Ethernet switches comply with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).

**Editable configuration file; USB port for import/export configuration**

The configuration file of the switch can be imported and edited with word processor for the following switches to configure with ease. The USB port can import/export the configuration from/to USB dongle and also to upgrade firmware from USB dongle. TFTP/HTTP firmware upgrade is supported.

**Event log & message; 2DI + 2DO; Factory default pin**

The switch provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the outside alarm and switch will send alert information to IP network with traps. The factory reset pin can restore the setting back to factory default.

**Optional smart bypass protection on dual 1G/2.5G copper ports**

The bypass relay is set to bypass the switch to the next one when power is off to prevent network disruption. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Optional smart bypass (one pair) can be activated when switch encounters power failure. (-BT model)

**Dual WVI / 24V / 24TVI input with max PoE budget and Inrush current protection**

The switch accept 16.8~137.5VDC (WVI model) ; 9~36VDC (24V model) ; 16.8~56VDC (24TVI model) dual input with Ethernet and PoE galvanic isolation and PoE model can feed 54V output for PoE feeding with 80W budget. The inrush current on initial power up can be limited lower than 10 x nominal current.

**EN50155, EN45545-2; EN61373 compliance; Rugged design with high ESD protection**


The switch is designed to meet with critical network environment with IP54/IP67 aluminum enclosure and M12

connectors for water proof. The switch passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke and EN50155 verification, it is best switch for railway on-board/track side, vehicle, and mining applications. For more usage flexibilities, the switch supports wide operating temperature from -40°C to 70°C (85°C operation for 10min), which is compliant with the EN50155 Operating Temperature Range Requirement Class OT4.

**E-marking certificate**

The E-marking certificate (24V model) makes it the most suitable switch for bus, carriage, other vehicles application as well as for industrial areas where the power source is limited with 24V but has demand of IP surveillance or VoIP applications.

**DIMENSIONS (unit=mm)**

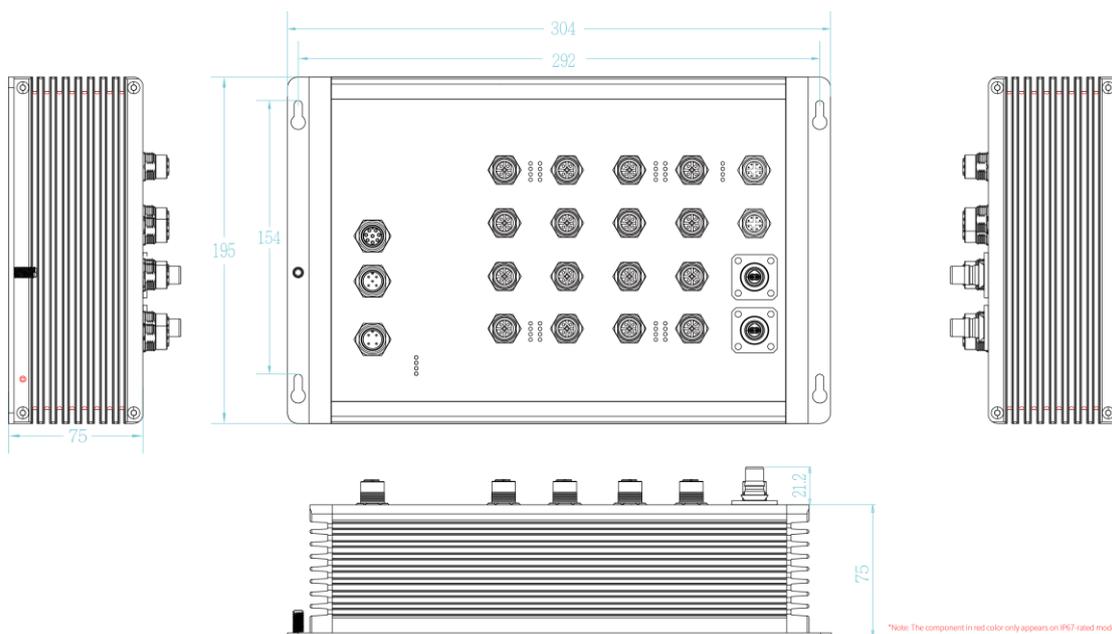

**SPECIFICATIONS**

**Hardware Specification**

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3an 10Gbase-T IEEE802.3ae 10G Fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet
Switch Architecture	Back-plane (Switching Fabric): 23.2Gbps
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100TX: 16 x M12 4-pole D-coded with Auto MDI/MDI-X function

	<p>1G/2.5G Copper: 2 x M12 8-pole X-coded with Auto MDI/MDI function 1G/2.5G Dual Speed Fiber: 2 x Q-ODC OM3 connector for single-mode or multi-mode type fiber cable Power Input connector : 1x M12 4-pole A-coded Male (WVI model)</p> <p><b>Power</b></p> <p>Reset/Console/USB : 1 x M12 8-pole A-coded DIDO: 1 x M12 5-pole A-coded</p>
Network Cable	<p>10Base-T: 4-pair STP Cat3 cable 100Base-TX: 4-pair STP Cat3/5 cable 1000Base-T: 4-pair STP Cat5/5e cable; 2.5G Copper: 4-pair STP Cat5e cable</p> <p><b>1G/2.5G fiber:</b> Multi-mode: 0 to 300 m, 850 nm (62.5/125 μm);</p>

LED	Single-mode: 0 to 2 km, 1310 nm (9/125 μm) Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) 10/100TX Ethernet port: Link/Activity (Green) 1G/2.5G copper: Link/Act (Yellow) 1G/2.5G fiber: Link/Act (Orange) PoE : Link/Act (Green) (PoE model)
DI/DO	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 80 VDC, 50mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-40°C~70°C / -40°F~158°F (85°C operation for 10min.)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	Dual DC input 16.8~137.5VDC (WVI model) ; 9~36VDC (24V model) ; 16.8~56VDC (24TVI model) (PoE galvanic isolation for PoE models; Ethernet galvanic isolation for all models)
PoE Budget (PoE model)	80W@24VDC Higher PoE budget can be applied upon request. **
PoE pin assignment (PoE model)	M12 port #1~#8/16 (-8/-16 model) ; #17~#18 (-10 model) ; support IEEE 802.3 at/af End-point, Alternative A mode
Power Consumption	Max. 37W exclude PoE load
Case Dimension	IP54/IP67 model: Aluminum case 304mm(W)x195mm(H)x96.2mm(D)
Weight	3.45kgs

Installation	Wall Mount
EMI & EMS	FCC Part 15 Class A, IEC/EN61000-6-2 CE EN55032 Class A CE EN55024 CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3 BS EN61000-4-2, BS EN61000-4-3, BS EN61000-4-4, BS EN61000-4-5, BS EN61000-4-6, BS EN61000-4-8, BS EN55032, BS EN55024
Verifications	EN50155/EN50121-3-2/EN50121-4/IEC61373; EN45545-1, EN 45545-2 Fire & Smoke verification
Stability Testing	EN61373 (Shock and Vibration)
Vehicle Certificate	E13 marking (UN ECE R10) (24V model)
MTBF	TBC (standards: IEC 62380)
Bypass**	One pair bypass module on 1G/2.5G Copper ports to pass to next switch in case of power failure
<b>Software Specification</b>	
Lantech OS3/OS4 Platform Download Software Datasheet <a href="https://www.lantech.com.tw/global/eng/download/datasheet/D-OS3_OS4.pdf">https://www.lantech.com.tw/global/eng/download/datasheet/D-OS3_OS4.pdf</a>	

\*Future release  
\*\*Optional

## ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name. For one pair bypass add -BT to model name.

- **TPES-L5416MGFT-8-QMM-54-WVI.....P/N: 8361-621**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QSM-54-WVI.....P/N: 8361-6211**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QMM-54-24VI.....P/N: 8361-62104**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QSM-54-24VI.....P/N: 8361-62114**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QMM-54-24TVI.....P/N: 8361-62107**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QSM-54-24TVI.....P/N: 8361-62117**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-10-QMM-54-WVI.....P/N: 8361-6212**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-10-QSM-54-WVI.....P/N: 8361-6213**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-10-QMM-54-24VI.....P/N: 8361-62124**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/10 PoE at/af incl.2 1G/2.5G

Copper EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation

- **TPES-L5416MGFT-10-QSM-54-24VI.....P/N: 8361-62134**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-10-QMM-54-24TVI.....P/N: 8361-62127**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-10-QSM-54-24TVI.....P/N: 8361-62137**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-16-QMM-54-WVI.....P/N: 8361-6214**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-16-QSM-54-WVI.....P/N: 8361-6215**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-16-QMM-54-24VI.....P/N: 8361-62144**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-16-QSM-54-24VI.....P/N: 8361-62154**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-16-QMM-54-24TVI.....P/N: 8361-62147**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-16-QSM-54-24TVI.....P/N: 8361-62157**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ PoE & Ethernet galvanic isolation
- **TES-L5416MGFT-QMM-54-WVI.....P/N: 8361-6216**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ Ethernet galvanic isolation
- **TES-L5416MGFT-QSM-54-WVI.....P/N: 8361-6217**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP54 housing w/ Ethernet galvanic isolation
- **TES-L5416MGFT-QMM-54-24V.....P/N: 8361-62164**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ Ethernet galvanic isolation
- **TES-L5416MGFT-QSM-54-24V.....P/N: 8361-62174**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP54 housing w/ Ethernet galvanic isolation
- **TES-L5416MGFT-QMM-54-24TVI.....P/N: 8361-62167**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ Ethernet galvanic isolation
- **TES-L5416MGFT-QSM-54-24TVI.....P/N: 8361-62177**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP54 housing w/ Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QMM-67-WVI.....P/N: 8361-6218**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QSM-67-WVI.....P/N: 8361-6219**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QMM-67-24VI.....P/N: 8361-62184**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QSM-67-24VI.....P/N: 8361-62194**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QMM-67-24TVI.....P/N: 8361-62187**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/8 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-8-QSM-67-24TVI.....P/N: 8361-62197**  
 16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/8 PoE at/af EN50155 OS3

- Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
- **TPES-L5416MGFT-10-QMM-67-WVI.....P/N: 8361-62185**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-10-QSM-67-WVI.....P/N: 8361-62195**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-10-QMM-67-24VI.....P/N: 8361-62186**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-10-QSM-67-24VI.....P/N: 8361-62196**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-10-QMM-67-24TVI.....P/N: 8361-62188**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-10-QSM-67-24TVI.....P/N: 8361-62198**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-16-QMM-67-WVI.....P/N: 8361-62165**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-16-QSM-67-WVI.....P/N: 8361-62175**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-16-QMM-67-24VI.....P/N: 8361-62166**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-16-QSM-67-24VI.....P/N: 8361-62176**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-16-QMM-67-24TVI.....P/N: 8361-62168**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TPES-L5416MGFT-16-QSM-67-24TVI.....P/N: 8361-62178**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; w/16 PoE at/af EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ PoE & Ethernet galvanic isolation
  - **TES-L5416MGFT-QMM-67-WVI.....P/N: 8361-62145**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ Ethernet galvanic isolation
  - **TES-L5416MGFT-QSM-67-WVI.....P/N: 8361-62155**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8~137.5V input ; -40°C to 70°C ; IP67 housing w/ Ethernet galvanic isolation
  - **TES-L5416MGFT-QMM-67-24V.....P/N: 8361-62146**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ Ethernet galvanic isolation
  - **TES-L5416MGFT-QSM-67-24V.....P/N: 8361-62156**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 9~36VDC input ; -40°C to 70°C ; IP67 housing w/ Ethernet galvanic isolation
  - **TES-L5416MGFT-QMM-67-24TVI.....P/N: 8361-62148**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC 300M; EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ Ethernet galvanic isolation
  - **TES-L5416MGFT-QSM-67-24TVI.....P/N: 8361-62158**  
16 10/100TX + 2 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC 2KM; EN50155 OS3 Managed Ethernet Switch ; 16.8~56VDC input ; -40°C to 70°C ; IP67 housing w/ Ethernet galvanic isolation

## OPTIONAL ACCESSORIES

### Software package

Please refer to the software datasheet ([https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3\\_OS4.pdf](https://www.lantechcom.tw/global/eng/download/datasheet/D-OS3_OS4.pdf))

### M12 Connector & Cable

#### Connector

■ ECONM12-04A(F)-C-180	4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
■ ECONM12-08A(M)-180	8 pin M12 (Male) A-coded 180 degree crimp type connector for reset/console/USB
■ ECONM12-05A(M)-C-180	5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO
■ ECONM12-08X(M)-SPEEDCON	8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON
■ ECONM12-04D(M)-C-180	4 pin M12 (Male) D-coded 180 degree crimp type connector for data

#### Cable


■ ECONM12-4P(F)1.5M CABLE	4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
■ ECONM12-08M2-CONSOLE	8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm
■ ECABM12X83MSTP	8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
■ ECAB124030MJS	4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
■ ECABM002-QOP2-3.0-MM-OM3	Q-ODC 2 plug/LC multi-mode fiber, MM-OM3, 300cm
■ ECABM002-QOP2-3.0-SM-OS2	Q-ODC 2 plug/LC single-mode fiber, SM-OS2, 300cm

#### Others

■ M12 to USB interface adapter	8 pin M12 (Male) A-coded 180 degree M12 to USB 2.0 interface adapter, 8cm
■ USB 2.0 Ethernet Adapter	USB 2.0 to RJ45 Ethernet Adapter
■ ECONM12-08(M) TO DB9+USB2.0-1.5M CABLE	8 pin M12 (Male) A-coded 180 degree M12 to USB2.0 to DB9 (Female) cable, 150cm

## Managed Switch OS Generations

We offer a comprehensive range of managed switches, from OS1 and OS2 with rich L2+ management features, to OS2 PRO with basic routing functionality, and OS3, OS4, and OS5, which can be upgraded with optional Layer 3 Lite or Layer 3 capabilities to meet diverse customer needs. Note: Model differences include both software features and hardware specifications.

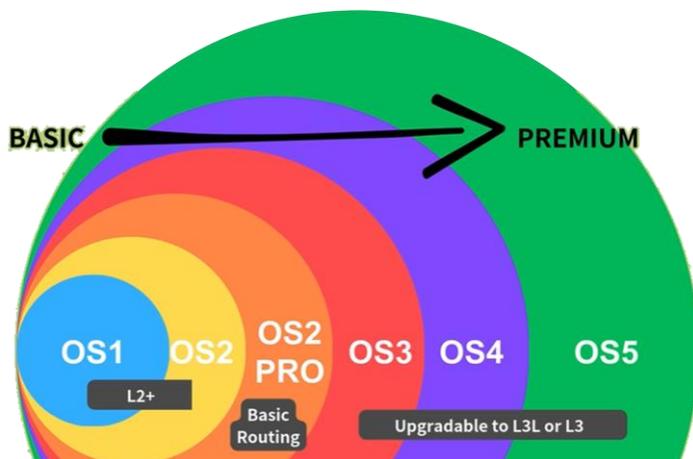

[LEARN MORE]

- [OS2PRO Generation](#)
- [OS3/OS4 Generation](#)
- [OS5 Generation](#)

[CHECK THE DIFFERENCES]

- [Generation Comparison Table](#)

Lantech Communications Global Inc.  
www.lantechcom.tw  
info@lantechcom.tw

© 2025 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 06 FEB 2026  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.