T(P)ES-3008T

8 FE (PoE) Vehicle and EN50155 M12 NAT Router Switch





OVERVIEW

Lantech T(P)ES-3008T (OS2 Pro generation) is available in basic and standard variants. It is a compact router switch for rail, metro, and vehicle 24V Ethernet systems. The switch provides 8 × 10/100TX ports with M12 X-coded connectors and up to 8 × 802.3af/at PoE Ethernet ports (PoE model). It supports Layer 2 management, NAT, Ignition PoE timer off, unique AUTO-FEED configuration, MQTT, advanced security, and health diagnostic snapshots for reliable onboard network deployment.The Auto-Feed feature allows new or replacement switches to automatically receive correct configurations, while traditional firmware/configuration upload/download via USB dongle is also supported. Both WebGUI and full CLI interfaces make configuration straightforward for all users.The OPEN API format enhances central management efficiency, making the switch ideal for fleet management and AIoT applications. Compliance with EN50155, ITxPT, and E-marking certifications ensures world-class reliability and performance for rail and vehicle onboard networks.

Redundant dual power input design; EN50155 verification with high ESD and inrush current prevention and reverse polarity protection; E-marking & ITxPT certificate; ISO 16750-2 compliant

T(P)ES-3008T is designed with dual power inputs that accept 9V~36V DC for 24VI vehicle use, and 16.8V-56VDC for 24TVI train model and is capable of withstanding EMI/RFI interference in the onboard network as well as environmental shocks and vibrations. The redundant power input design integrates inrush current protection also protect against polarity reversal. Additionally, the galvanic isolation feature shields the system from power transients often present in onboard networks. The switch complies with ITxPT public transport standards and E-marking. It also meets the requirements of ISO 16750-2 P5A, reducing the impact of high-frequency pulse voltage that could be incurred by motor applications.

Embedded Inner-lock push-pull connectors ensure fast installation and connection reliability (-PP model)

The built-in inner-lock push-pull connectors give the switch small-footprint design and for space-saving cabling installation. They ensure quick, tool-free installation with a simple push. Most importantly, their secure locking mechanism provides unwavering reliability, preventing accidental disconnections crucial for network uptime.

Support Perpetual/Fast PoE*; PoE budget up to 80W for 8 Ports with PD detection, auto PD reboot, scheduling and Ethernet power input galvanic isolation with partial ports for PoE galvanic isolation*

Fast PoE* and Perpetual PoE* combined provide uninterrupted power delivery for critical devices. Fast PoE instantly supplies power after startup, while Perpetual PoE maintains power during switch reboots or upgrades. Together, they ensure continuous, reliable operation of Powered devices (PD) in mission-critical environments.

TPES-3008T supports a maximum PoE budget of 80W and offers advanced PoE management features such as auto-detection and scheduling. The PoE detection automatically identifies unresponsive the PD and promptly restarts them. Additionally, PoE scheduling enables preset power feeding based on routine timetables. Each PoE port can be individually enabled or disabled and provides real-time data on voltage, current, power (W), and temperature.

Galvanic isolation between the power input and Ethernet power system enhances safety. Extra PoE galvanic isolation on 802.3at/af ports insulates the power input from PoE Ethernet ports, preventing damage from cabling and grounding incidents to the Ethernet switch.

Sleep Mode & efficient PoE timer under Ignition-Off State on IGN model

The PoE-IGN model supports network operation for up to 60 minutes before entering Sleep Mode (0.048W), preventing unnecessary reboots when power is restored. It also includes a configurable PoE timer, with a default delay of 10 minutes after ignition-off.

The Ignition timer allows flexible configuration of both individual PoE port shutdown delays and system shutdown (Sleep Mode), ranging from 30 seconds to 60 minutes (default: 60 minutes). This design eliminates the need for additional relay wiring and enables remote PoE timer configuration anytime, from anywhere.

mDNS (Multicast DNS) and DNS server/client feature and MQTT-role of Publisher or Broker, ITxPT Inventory service, X status

T(P)ES-3008T supports mDNS (Multicast DNS), enabling hosts within the LAN to discover and communicate with each other following DNS protocol, without the need for a traditional DNS server.
The switch also functions as an MQTT Publisher or Broker, sending data to the broker which then distributes the “payload” to subscribers efficiently using a lightweight protocol.
In addition, the switch supports ITxPT Inventory service, X status, DNS-SD, and MQTT protocols for comprehensive remote monitoring of Ethernet switch status.

Reliable eMMC for better power efficiency and reliability

T(P)ES-3008T utilizes eMMC for firmware storage, enhancing product reliability and effectively extending its lifespan under frequent power on/off conditions.

Comprehensive Network Protection Against DDoS and Layer 2 Threats

Lantech OS2Pro generation integrates advanced security mechanisms to safeguard both switches and networks. Key features include DDoS attack mitigation, 802.1X port-based authentication, Dynamic ARP Inspection (DAI), IP Source Guard, and Port Security, providing multi-layer protection against spoofing, unauthorized access, and traffic floods. These security capabilities ensure stable, resilient network operation.

Lantech OS2 PRO Generation with L2 management routing protocols incl. OSPF and RIP V1&V2

T(P)ES-3008T developed on the Lantech OS2 Pro generation, is equipped with comprehensive Layer 2 management and routing protocols, including inter-VLAN routing, OSPF, and RIP v1/v2. Designed for versatile vehicle applications, the generation further supports advanced networking functions such as NAT, port forwarding, multiple static IP addresses, DHCP (server/option/client/port-based), VLAN, DHCP over VLAN, IGMP, RSTP/G.8032 enhanced ring recovery, LACP, and more.

Open RESTful API for Seamless Integration and High-Performance Network Management

The switch features a lightweight and efficient Open RESTful API designed for seamless integration with centralized network management software. Using standard HTTP methods (GET, PUT, POST, DELETE) and JSON data structures, the API enables real-time access to configuration and operational data.
By leveraging modern web technologies, the switch minimizes CPU overhead typically associated with traditional SNMP polling, delivering faster response times, reduced system load, and improved scalability for high-performance network environments.

Auto feed configuration for swapped new switches for Seamless Network Maintenance, USB port for backup, restoring configuration and upgrading firmware

T(P)ES-3008T supports Auto-Feed configuration, simplifying network switch setup and management. It ensures that new or replacement switches automatically receive the correct configurations without manual intervention. In addition, the switch supports traditional methods of firmware and configuration upload/download via USB dongle.

User-friendly GUI, Auto topology drawing, Editable configuration text file, Enhanced Environmental Monitoring, CPU watchdog, Snapshot switch information for trouble-shooting analysis

T(P)ES-3008T offers a user-friendly UI complemented by innovative auto topology drawing and topology demo features, simplifying network management. Configuration files can be exported as editable text files, facilitating easy modification and mass deployment. Its built-in watchdog function automatically reboots the switch if the CPU becomes unresponsive. It supports enhanced environmental monitoring of actual input voltage, current, ambient temperature and total power load where user can set threshold to trigger an alert or event log. Additionally, the unique Snapshot feature enables data collection—including port statistics, system core info, configurations, and event logs—either on-demand or scheduled, helping quickly identify and resolve network issues.

OPTIONAL FEATURES

Optional LantechView for Lantech devices maintenance

LantechView software automatically detects Lantech devices across the network, enabling seamless configuration management over multiple IP subnets and VLANs—both for individual devices and batch operations. It also offers comprehensive firmware management, supporting single or group verification and simultaneous upgrades to the latest versions.
For more details on LantechView software solutions, please visit:
https://www.lantechcom.tw/global/eng/download/datasheet/D-LantechView.pdf

Optional IEC 62443-4-2 Model with Physical Tamper Resistance and a Variety of Security Measures


For enhanced cybersecurity, the optional IEC 62443-4-2 is available on -SEC model. This includes over 90 security measures such as vulnerability checking, encrypted files, public key management, strong password enforcement, account management, and both penetration and stress testing. It emphasizes protection against unauthorized access, tampering, and malware through detailed log events and roots of trust security IC. To learn more about Lantech cybersecurity software solutions, please refer to
https://www.lantechcom.tw/global/eng/download/datasheet/D-OS2PRO.pdf

OS2 Pro vs. OS2 Pro - SEC models comparison


	OS2 Pro	OS2 Pro - SEC
Management	Web UI/Telnet complete CLI command line	Web UI/Telnet complete CLI command line
IEC 62443-4-2 Cyber Security	NA	Y, need optional license
Hardware Environmental Monitoring	Y	Y
Boot up time	Within 60sec.	Around 90sec.

DIMENSIONS (unit=mm)

PoE models

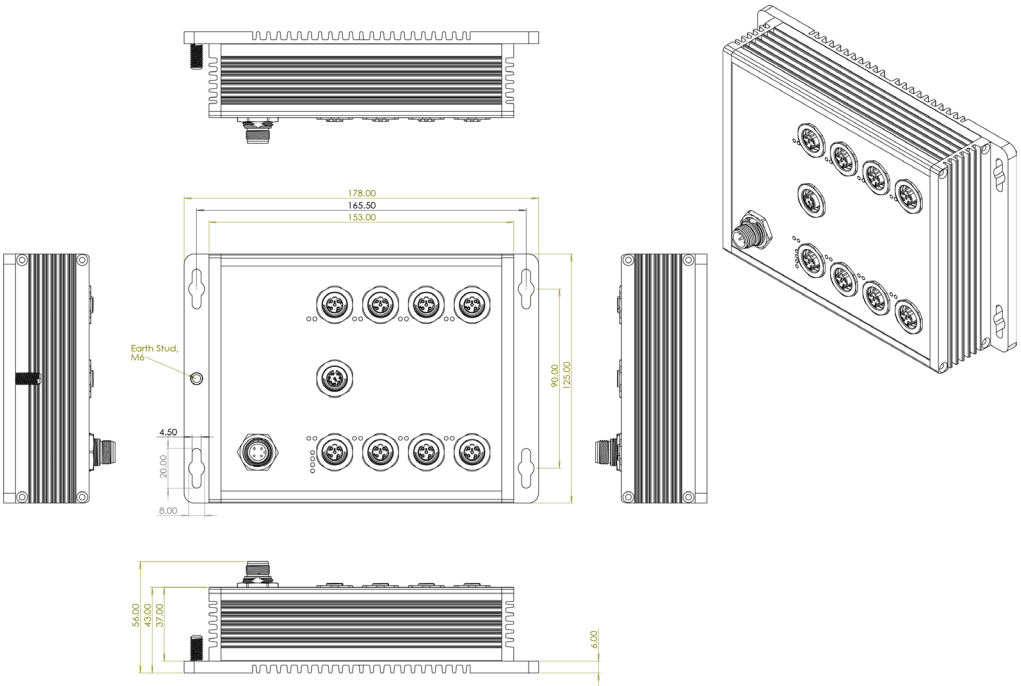

Non-PoE models

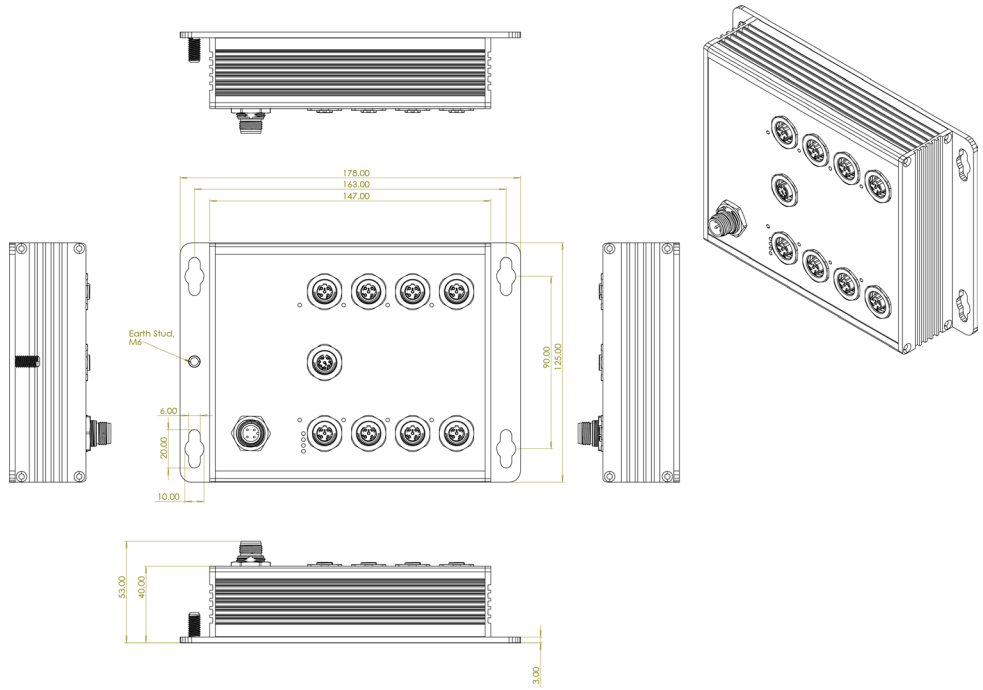

SPECIFICATIONS

Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T Ethernet IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet (PoE model)
Switch Architecture	Back-plane (Switching Fabric): 1.6Gbps
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port
Mac Address	16K MAC address table
Jumbo frame	10KB
Connectors	10/100TX: 8 x M12 4-pole D-coded connector Power Input connector: 1 x M12 4-pole Male A-coded Reset/Console/USB: 1 x M12 8-pole A-code Note: Push-pull connectors feature an inner lock and are suitable for push-pull and screw-type cabling.
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
	100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Amber); PoE: Link/Act (Green)
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-40°C~70°C / -40°F~167°F (-IGN-E; -24TVI models)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	9-36VDC (24VI) 16.8-56VDC (24TVI)
PoE Budget	80W at 24VDC
PoE pin assignment	M12 port #1-#8 supports IEEE 802. 3at/af End-point. Per port provides up to 30W
Power Consumption	7W (w/o PoE load)
Case Dimension	IP54: Aluminum case 178mm(W)x125mm(H)x56mm(D) (PoE models) 178mm(W)x125mm(H)x53mm(D) (Non-PoE models)
Weight	1.03kgs (PoE models) 880g (Non-PoE model)
Installation	Wall Mount / Din Rail mount**
EMI & EMS	FCC Class A, CE EN55032 Class A, CE EN55024, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5,

	CE EN61000-4-6, CE EN61000-4-8, CE EN61000-6-2, CE EN61000-6-4
Verifications	EN50155/EN50121-3-2/EN50121-4 EN45545-1, EN 45545-2 Fire & Smoke
Stability Testing	EN61373 (Shock and Vibration)
Vehicle Certificate	E24 marking (UN ECE R10) ITxPT labeled
Vehicle Compliance	UN ECE R118
Bypass***	One pair bypass module on uplink ports to pass to next switch in case of power failure and

CPU hang (-BT model)

Software Specification

Lantech OS2PRO Generation
Download Software Datasheet

(https://www.lantechcom.tw/global/eng/download/datasheet/D-OS2PRO.pdf)

*Future release
**Optional
***only for Web-managed model

ORDERING INFORMATION

All model packages include M12 caps. For conformal coating add –C to P/N & model names; for optional bypass add –BT (one pair); add -IGN for ignition models; add -SEC for Cybersecurity models
✻ To support environmental sustainability, the console cable will not be included with each device by default, but partially when required

- **TPES-3008T-8-54-24VI-IGN-E-PP ……P/N: 8351-155**
  8 10/100TX push-pull connector w/8 PoE at/af L2+ NAT router Switch w/ PoE & Ethernet galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated, w/ignition.
- **TPES-3008T-8-54-24VI-E-PP ……P/N: 8351-15501**
  8 10/100TX push-pull connector w/8 PoE at/af L2+ NAT router Switch w/ PoE & Ethernet galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated
- **TPES-3008T-8-54-24TVI-E-PP…… P/N: 8351-15502**
  8 10/100TX push-pull connector w/8 PoE at/af L2+ NAT router Switch w/ PoE & Ethernet galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP54 rated.
- **TES-3008T-54-24TVI-E-PP…… P/N: 8351-15503**
  8 10/100TX push-pull connector L2+ NAT router Switch w/ Ethernet galvanic isolation; 16.8~56VDC dual input; -40°C to 70°C; IP54 rated
- **TES-3008T-54-24VI-IGN-E-PP…… P/N: 8351-15504**
  8 10/100TX push-pull connector L2+ NAT router Switch w/ Ethernet galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated, w/ignition
- **TES-3008T-54-24VI-E-PP…… P/N: 8351-15505**
  8 10/100TX push-pull connector L2+ NAT router Switch w/ Ethernet galvanic isolation; 9~36VDC dual input; -40°C to 70°C; IP54 rated

*For all detailed part nos. and model names, please refer to
https://www.lantechcom.tw/global/eng/download/datasheet/P-T(P)ES-3008T.pdf

OPTIONAL ACCESSORIES

Software package

Please refer to the software datasheet (https://www.lantechcom.tw/global/eng/download/datasheet/D-OS2PRO.pdf)

M12 Connector & Cable

Connector

ECONM12-04D(M)-C-180	4 pin M12 (Male) D-coded 180 degree crimp type connector for data
ECONM12-08X(M)-SPEEDCON	8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON


Cable

ECAB124030MJS	4 pin M12 (Male) D-coded 180 degree RJ45 STP cable for data, 300cm
ECABM12X83MSTP	8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
ECONM12-5P(F)70CM CABLE	5 pin M12 (Female) A-coded 90 degree cable for power supply, 70cm
4106-00000091-001	M12 5P A-code Male To RS232 Console Cable

Managed Switch OS Generations

We offer a comprehensive range of managed switches, from OS1 and OS2 with rich L2+ management features, to OS2 PRO with basic routing functionality, and OS3, OS4, and OS5, which can be upgraded with optional Layer 3 Lite

or Layer 3 capabilities to meet diverse customer needs. Note: Model differences include both software features and hardware specifications.

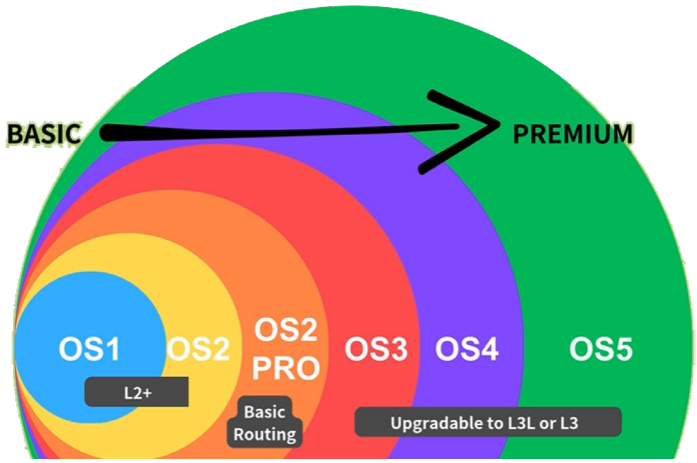

[LEARN MORE]

→ OS2PRO Generation

→ OS3/OS4 Generation

→ OS5 Generation

[CHECK THE DIFFERENCES]

→ Generation Comparison Table

Lantech Communications Global Inc.
www.lantechcom.tw
info@lantechcom.tw

© 2026 Copyright Lantech Communications Global Inc. All rights reserved. Updated on 3 SEP 2026
The revised authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.