# T(P)GS-H7508XTR

## 8 GT + 5 10G Copper M12 Push-Pull X-coded (PoE) EN50155 Managed Ethernet Security Switch w/optional L3L/L3 & Cybersecurity, WVI input



## OVERVIEW

Lantech T(P)GS-H7508XTR is a high-performance OS5 managed ethernet security switch with 8 10/100/1000T + 5 100M/1G/2.5G/5G/10G Copper PoE switch (total 13 ports) w/ M12 X-coded Push-Pull connectors. The OS5 platform supports L3/L2, IPv6/v4, NAT**, standardized ITU G.803 ring, IEC62443-4-2** certified cybersecurity, SNMPv3, Macsec**, PTP v2** as well as ETBN TTDP** protocol suitable for the future-proof modern network.

***Lantech OS5 platform is equipped with complete L2 management and L3 communication protocols incl. dynamic routing, multicast routing, hardware NAT and ETBN TTDP; TRDP, optional PTP, MacSec to be upgradable***

The switch runs on the Lantech OS5 platform which is powerful with complete Layer 2 management features and major L3 protocols inclusive of RIP, OSPF, PIM, DVMRP, IEC61375-2-5 (ETBN), and hardware-based NAT. It also supports optional Macsec for authentication and encryption between two Macsec devices. The optional PTP V2 and gPTP support transparent clock, boundary clock and ordinary clocks with 2-step processing that synchronizes network time accuracy to sub-microseconds. To learn more about the Lantech OS5 Platform, please refer to **Lantech OS5 Software Datasheet**

***SNMP v3 Security Models***

SNMPv3 enhances security with three key models. The User-based Security Model (USM) provides authentication and encryption, verifying the sender's identity and protecting data. The View-based Access Control Model (VACM) manages user access to specific objects based on their security level. The Transport Security Model (TSM) uses secure protocols like TLS or DTLS for communication encryption. Together, these models make SNMPv3 implementations highly secure, meeting modern cybersecurity standards for large-scale and high-security projects.

***Comprehensive Network Protection Against DDoS and Layer 2 Threats***

Lantech OS5 generation integrates advanced security mechanisms to safeguard both switches and networks. Key features include DDoS attack mitigation, 802.1X port-based authentication, Dynamic ARP Inspection (DAI), IP Source Guard, and Port Security, providing multi-layer protection against spoofing, unauthorized access, and traffic floods. These security capabilities ensure stable, resilient network operation.

***Support Restful API for better switch performance; Auto-provisioning* for firmware/configuration update***

The switch supports Restful API that uses JSON format to access and use data for GET, PUT, POST and DELETE types to avoid traditional SNMP management occupying CPU utilization. The OPEN API document format for Restful API can greatly improve central management efficiency for various applications including fleet management and AIOT.

It also supports auto-provisioning for switch to auto-check the latest software image and configuration through TFTP server.

***Optional IEC 61375-2-5/3-4 ETBN/ECN TTDP protocol, RNAT and proprietary DHCP and VLAN over TTDP***

Lantech optional L3L/L3 license includes IEC 61375-2-5 and 3-4 ETBN standardized TTDP protocol that automatically assigns the switch IP address reflecting its location to adapt with various train-car arrangements of the operator's plan. With RNAT (railway NAT), each car device's IP address can be routed to the specific server and proprietary DHCP and VLAN over TTDP to help manage fixed IP address per device as well as the segmentation of VLAN in ECN.

***Redundant dual WVI power input w/ power transient, inrush current, polarity reverse and over-heat protection***

The T(P)GS-H7508XTR WVI model accepts 16.8~137.5VDC dual inputs with galvanic isolation to PoE and all Ethernet ports. The switch incorporates a power protection circuit to safeguard against potential adverse effects and hazards from power transients (surges, spikes, power fluctuations). It is also designed to clamp inrush current and protect from polarity reversal damage. The switch will automatically disable power output when the switch ambient temperature is over 85°C and re-boot when the temperature is back to normal.

***Up to 10 PoE ports include 8 IEEE 802.3at/af and 2 T4 PoE 802.3bt/at/af (-10) w/advanced PoE management and PoE galvanic isolation with max PoE budget, support Perpetual/Fast PoE***

Compliant with 802.3 bt/at/af standard, the PoE model can feed 24 PoE ports up to 30 Watt@ or 24 PoE 30 Watt@ and 2 PoE IEEE 802.3bt to feed T4 PoE up to 90 Watt@ for various PD devices. The switch supports 120W PoE budget. It supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow a pre-set power feeding schedule upon a routine timetable. Each PoE port can be enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.Perpetual and Fast PoE provides immediate and continuous power to devices during PSE switch reboots. The PoE galvanic isolation provides insulation between the power input to PoE Ethernet ports, preventing cabling and grounding incidents from damaging the Ethernet switch. The efficiency of the galvanically decoupled voltage converters can reach above 90%.

***Support RTC (Real Time Clock) with longevity golden capacitor***

Our switch supports RTC which is powered by a golden capacitor, ensuring accurate real-time event logs for all times. Unlike traditional batteries, golden capacitors offer superior reliability, and longevity, without a need to change battery.

***User-friendly GUI, Auto topology drawing, Enhanced Environmental Monitoring***

The user-friendly UI, innovative auto topology drawing, and topology demo make the switch much easier to get hands-on. The complete CLI enables professional engineers to configure settings by command line. It supports enhanced environmental monitoring for actual input voltage, current, switch ambient temperature and total power load.

***Event log & message; 2DI + 2DO; Factory default pin***

T(P)GS-H7508XTR provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the outside alarm and switch will

send alert information to IP network with email and traps.
The factory reset pin can restore the setting back to factory default.

### *Editable configuration file; USB port for import/export configuration*

The configuration file of the switch can be imported and edited with a word processor for the following switches to configure with ease. The USB data port can import/export the configuration from/to the USB dongle and also to upgrade firmware. It supports USB console port that allows CLI access.

### *Optional smart bypass protection on dual/quad 10G copper ports*

The bypass relay is set to bypass the switch to the next one when power is off to prevent network disruption. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network loss. An optional smart bypass (Up to two pairs) can be activated when switch encounters power failure. (-BT/-BBT model)

### *EN50155, EN45545-2; EN61373 compliance; IP41 rack mount design*

The IP41 aluminum alloy enclosure with M12 connectors for waterproofing. With EN50155 verification along with EN45545-2 Fire & Smoke compliance, this switch is ideally suited for railway on-board/trackside, vehicle, and other rugged applications. The switch operates under wide-ranging temperatures from -40°C to 70°C (-40°F to 158°F) (EN50155 T4).

## OPTIONAL FEATURES

### *Optional Certified IEC 62443-4-2 with Physical Tamper Resistance and a Variety of Security Measures*

For enhanced cybersecurity, the optional certified IEC 62443-4-2 model is available. This includes over 90 security measures such as vulnerability checking, encrypted files, public key management, strong password enforcement, account management, and both penetration and stress testing. It emphasizes protection against unauthorized access, tampering, and malware through detailed log events and roots of trust security IC. To learn more about Lantech cybersecurity software solutions, please refer to
https://www.lantechcom.tw/global/eng/download/datasheet/D-OS5.pdf


### *Optional LantechView for Lantech devices maintenance*

LantechView** can automatically discover Lantech devices on the network, providing seamless configuration management across multiple IP subnets and VLAN areas (single device and batch). It also supports firmware management, allowing single and batch verification and simultaneous upgrades to the latest firmware versions.
To learn more about Lantech LantechView** software solutions, please refer to
https://www.lantechcom.tw/global/eng/download/datasheet/D-LantechView.pdf

### *OS5 vs. OS5 - SEC models comparison*

| | OS5 | OS5 - SEC |
|---|---|---|
| **IEC 62443-4-2 Cyber Security** | NA | Y, need optional license |
| **Boot up time** | Around 100 sec. | Around 135 sec. |

## DIMENSIONS (unit=mm)

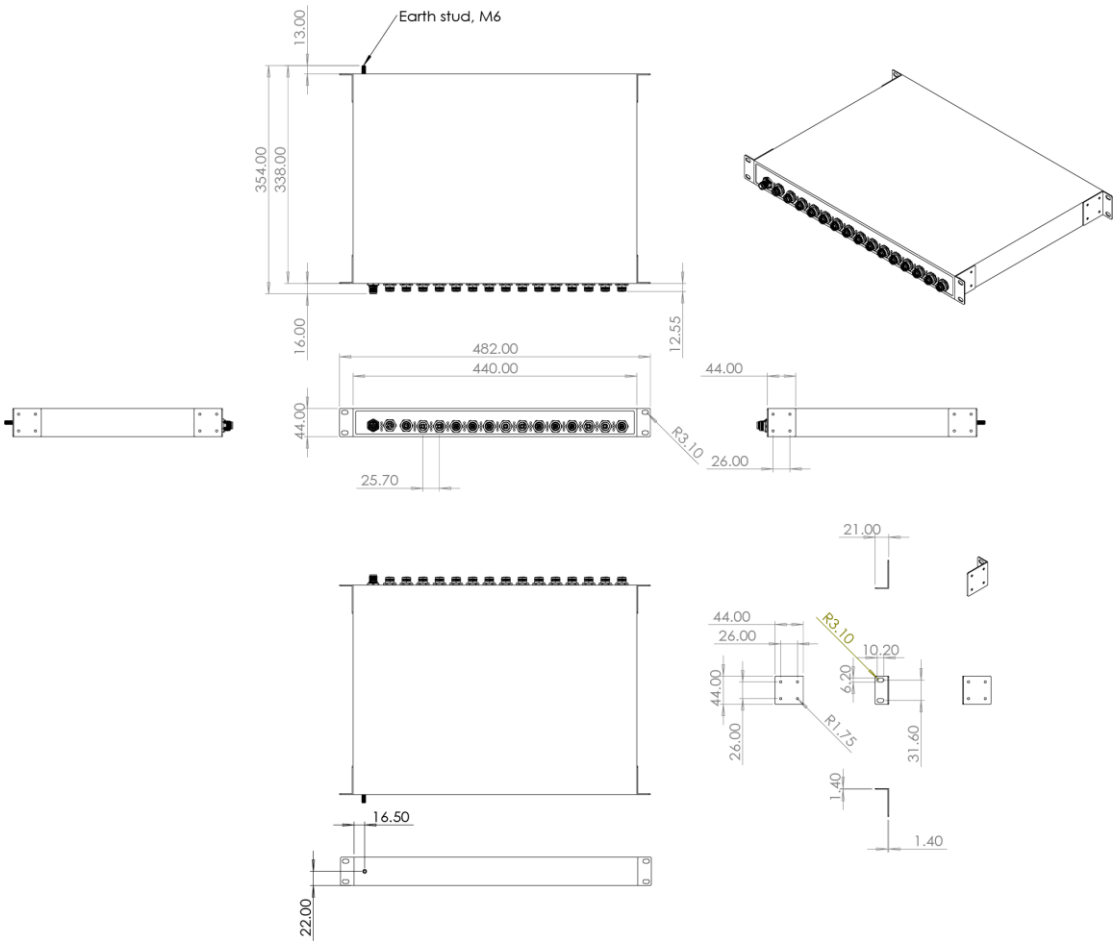
Earth stud, M6
13.00
354.00
338.00
16.00
12.55
482.00
440.00
44.00
44.00
R3.10
26.00
25.70
21.00
44.00
26.00
R3.10
10.20
6.20
44.00
26.00
R1.75
31.60
1.40
1.40
16.50
22.00

# SPECIFICATIONS

## Hardware Specification

| | |
|---|---|
| Standards | IEEE802.3 10Base-T Ethernet<br>IEEE802.3u 100Base-TX<br>IEEE802.3ab 1000Base-T<br>IEEE802.3an 10Gbase-T<br>IEEE802.3x Flow Control and Back Pressure<br>IEEE802.3ad Port trunk with LACP<br>IEEE802.1d Spanning Tree<br>IEEE802.1w Rapid Spanning Tree<br>IEEE802.1s Multiple Spanning Tree<br>IEEE802.3ad Link Aggregation Control Protocol (LACP)<br>IEEE802.1AB Link Layer Discovery Protocol (LLDP)<br>IEEE802.1X User Authentication (Radius)<br>IEEE802.1p Class of Service<br>IEEE802.1Q VLAN Tag<br>IEEE802.3at/af Power over Ethernet<br>Type 3 IEEE802.3bt Power over Ethernet<br>Type 4 IEEE802.3bt Power over Ethernet |
| Switch Architecture | Back-plane (Switching Fabric): 116Gbps |
| Mac Address | 32MAC address table |
| Jumbo frame | 10KB |
| Connectors | 10/100/1000T: 8 ports M12 X-coded with Push-Pull connectors<br>100M/1G/2.5G/5G/10G: 5 ports M12 X-coded with Push-Pull connectors<br>Power Input connector: 1 x M12 5-pole Male K-coded<br>Reset/Console/USB: 1 x M12 8-pole Female A-coded with Push-Pull connectors<br>DIDO: 1 x M12 5-pole Female A-coded with Push-Pull connectors |
| Network Cable | 100Base-TX: 2-pair STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)<br>1000Base-TX: 2-pair STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)<br>10G Copper: 4-pair STP Cat6a/7 cable |
| LED | Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red)<br>100/1000T Ethernet port: Link/Activity (Green), Speed (Green);<br>R.M. indicator (Green)<br>PoE: Link/Act (Green)<br>100/1G/2.5G/5G/10G Copper port: Speed (100/1G/2.5G/5G: Yellow; 10G: Orange) |
| DI/DO | 2 Digital Input (DI):<br>Level 0: -30~2V / Level 1: 10~30V<br>Max. input current:8mA<br>2 Digital Output (DO): Open collector to 40 VDC, 200mA |
| Operating Humidity | 5% ~ 95% (Non-condensing) |
| Operating Temperature | -40C~70C / -40F~158F (85°C operation for 10min.) |
| Storage Temperature | -40°C~85°C / -40°F~185°F |
| Power Supply | Dual DC input<br>16.8~137.5VDC |
| Inrush Current | 6A |
| PoE Budget (PoE model) | 120W with PoE galvanic isolation |
| PoE pin assignment (PoE model) | M12 port #1~#8 (AT 30W);<br>M12 port #9~#10 (BT 90W)<br>support IEEE 802.3bt/at/af End-point, Alternative A mode |
| Power Consumption | Max. 40W excludes PoE load |
| Dimensions | IP41 Aluminum alloy case (rack mount): 440mm(W)x44mm(H)x354mm(D) |
| Weight | 5kgs |
| Installation | Wall Mount Design |
| EMI & EMS | FCC Part 15 Class A<br>EN61000-6-2<br>EN61000-6-4<br>CE EN55032 Class A<br>CE EN55024<br>CE EN61000-4-2 (ESD) Level 3<br>CE EN61000-4-3 (RS) Level 3<br>CE EN61000-4-4 (EFT) Level 3<br>CE EN61000-4-5 ED3 (Surge) Level 3<br>CE EN61000-4-6 (CS) Level 3<br>CE EN61000-4-8 (Magnetic field) Level 3 |
| Verifications | EN50155/EN50121-3-2/EN50121-4;<br>EN 45545-1, EN 45545-2 Fire & Smoke verification |
| Stability Testing | EN61373 (Shock and Vibration) |
| MTBF | 226,702hrs (standards: IEC 62380) |
| Bypass** | Up to two pairs bypass modules on 10GT ports to pass to the next switch in case of power failure and CPU fail |

## Software Specification

| | |
|---|---|
| Lantech OS5 Platform | **Download Software Datasheet** |

*Future release
**Optional

# ORDERING INFORMATION

All model packages include M12 caps. For conformal coating add –C to P/N & model names; for optional bypass add –BT (one pair); -BBT (two pairs) to model names. For other optional features (PTP, MacSec, Cybersecurity, L3L or L3 software, add -PTP; -MacSec, -SEC, -L3L or -L3 to model names, please refer to the corresponding software part numbers as listed in the software datasheet.
***https://www.lantechcom.tw/global/eng/download/datasheet/D-OS5.pdf***

- **TPGS-H7508XTR-10-41-WVI.....P/N: 8361-0201**
  8 100/1000T PoE at/af + 5 100M/1G/2.5G/5G/10G M12 X-coded w/2 T4 PoE bt 90W EN50155 OS5 Managed Ethernet Switch; 16.8~137.5V dual input; IP41 rack mount design; -40°C to 70°C; w/PoE & Ethernet galvanic isolation
- **TGS-H7508XTR-41-WVI.....P/N: 8361-0202**
  8 100/1000T + 5 100M/1G/2.5G/5G/10G M12 X-coded EN50155 OS5 Managed Ethernet Switch; 16.8~137.5V dual input; IP41 rack mount design; -40°C to 70°C; w/Ethernet galvanic isolation

*For all detailed part nos. and model names, please refer to
https://www.lantechcom.tw/global/eng/download/datasheet/P-T(P)GS-H7508XTR.pdf

# OPTIONAL ACCESSORIES

### Software package


Please refer to the software datasheet

### M12 Connector & Cable

| | |
|---|---|
| **Connector** | |
| ■ **ECONM12-08A(M)-180** | 8 pin M12 (Male) A-coded 180 degrees crimp type connector for reset/console/USB |
| ■ **ECONM12-05A(M)-C-180** | 5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO |
| ■ **ECONM12-08X(M)-SPEEDCON** | 8 pin M12 (Male) X-coded 180 degrees crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON |
| ■ **4106-00000097-001** | 5 pin M12 (Female) K-coded 180 degrees screw type connector for power supply |
| **ECONM12-05K(F)-S-180** | |
| **Cable** | |
| ■ **ECABM12X83MSTP** | 8 pin M12 (Male) X-coded 180 degrees RJ45 STP cable for data, shielded, 300cm |
| ■ **ECONM12-08M2-CONSOLE** | 8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm |
| ■ **4106-00000096-001** | 5 pin M12 (Female) K-coded 90 degrees 1.5M cable for power supply |
| **ECABM12-05K(F)-90-1.5M** | |
| **Others** | |
| ■ **4106-00000093-001** | 8 pin M12 (Male) A-coded 180 degrees to USB Female/male plug, 150cm |

# Managed Switch OS Generations

We offer a comprehensive range of managed switches, from OS1 and OS2 with rich L2+ management features, to OS2 PRO with basic routing functionality, and OS3, OS4, and OS5, which can be upgraded with optional Layer 3 Lite or Layer 3 capabilities to meet diverse customer needs. Note: Model differences include both software features and hardware specifications.

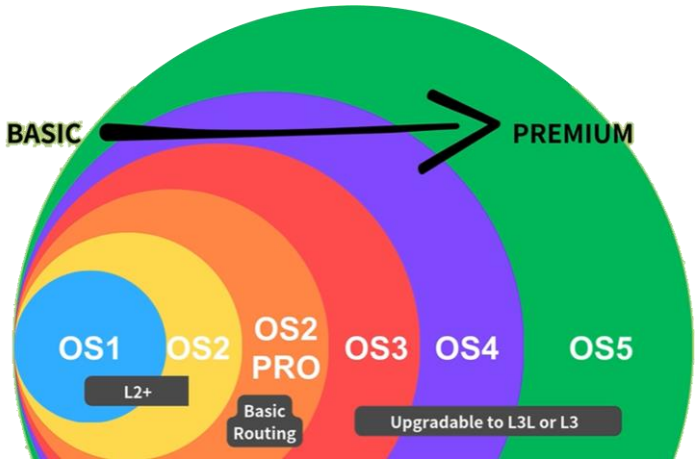


**[LEARN MORE]**

→ OS2PRO Generation

→ OS3/OS4 Generation

→ OS5 Generation

**[CHECK THE DIFFERENCES]**

→ Generation Comparison Table

**Lantech Communications Global Inc.**
www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. All rights reserved. Updated on 4 MAR 2026
The revised authority rights of product specifications belong to Lantech Communications Global Inc.
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.