

Zenclean

Deliver Optimal Sparkling Clear Water

For Residential and Semi-commercial Pools



Zenclean Sand Filter F21

Zenclean Sand Filter F25

Zenclean Sand Filter F28

Zenclean Sand Filter F32



The Pool Controls F Series Sand Filters are manufactured by automatic bobbin winding technology from long-lasting and non-corrosive fiberglass and resin. The UV resistant composites allow the filter to resist extreme weather conditions for a long working life without corrosion.

F Series Sand Filters are equipped with:



**6-way clamp/bolt
style multiport valves**



**Pressure
Gauges**



**Lateral
Systems**



**Universal standard of
union connections**



**UV Resistant
Composites**

Call +61 (8) 9240 4400

sales@poolcontrols.com.au | service@poolcontrols.com.au

poolcontrols.com.au

**Balance
Experience
Innovation**



**POOL
CONTROLS**

Zenclean Sand Filters F Series

Zenclean


Bobbin-wound Reinforced Fiberglass Tank

Max Temperature **43°C (109°F)**


Max Operating Pressure **36psi (2.5bar)**

Suggested Media **Glass Media**

F21 & F25

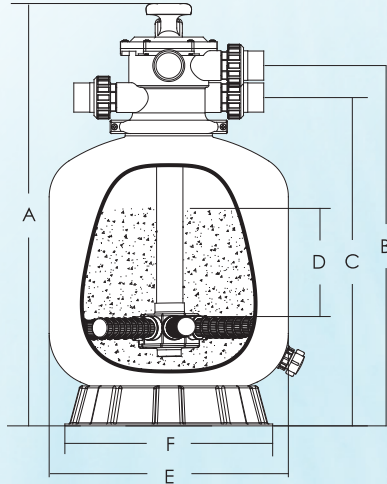

F28 & F32

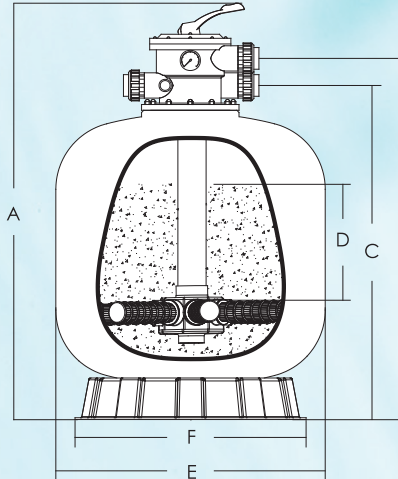

Product Dimensions

Model	A mm	B mm	C mm	D mm	E mm	F mm
Zenclean Sand Filter F21	845	730	670	235	535	500
Zenclean Sand Filter F25	950	835	775	300	635	500
Zenclean Sand Filter F28	1020	905	845	330	710	500
Zenclean Sand Filter F32	1200	1085	1002	425	800	780

Technical Information

Model	Filter Area (m²)	Valve Connections	Max Flow Rate		Sand Media (kg)	Glass Media (kg)
Zenclean Sand Filter F21	0.22	40mm	185lpm	11.10m³/hr	85	68
Zenclean Sand Filter F25	0.32	50mm	260lpm	15.60m³/hr	145	116
Zenclean Sand Filter F28	0.4	50mm	325lpm	19.50m³/hr	210	168
Zenclean Sand Filter F32	0.5	50mm	415lpm	24.90m³/hr	355	284

i Glass Media Sizes Glass Media **Fine** 0.5mm 15kg | Glass Media **Coarse** 1mm 15kg

Call +61 (8) 9240 4400

sales@poolcontrols.com.au | service@poolcontrols.com.au

poolcontrols.com.au

Balance
Experience
Innovation



**POOL
CONTROLS**