


GreenBurn® SAND

STAGED AIR NATURAL DRAUGHT

DATA SHEET

- > Low NOx / Staged Air Burner
- > Natural Draught / Multi-Fuel
- > Up or Side Fired
- > Round or Flat Flame

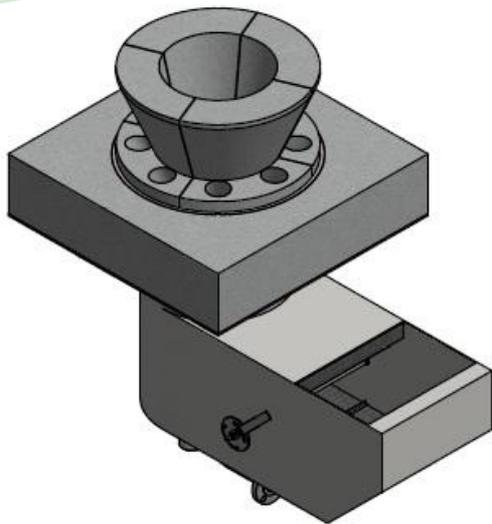


Features

- » Turndown 10:1
- » Noise < 85 dB'A'
- » NOx < 100 mg/Nm³
- » CO < 30 mg/Nm³
- » Single combustion damper for ease of operation
- » Single gas inlet for reduced site connections
- » Silenced windbox with perforated retaining plate for longer insulation life
- » Silenced air inlet for low noise applications

Overview

The GreenBurn® SAND uses the principle of staged air, by splitting the combustion air into primary and secondary regions, Greens can achieve Low NOx emissions whilst in turn providing stability and greater resistance to plugging across a wide range of fuel gases due to the fuel gun(s) larger holes.

GreenBurn® SAND Burner Selection Chart

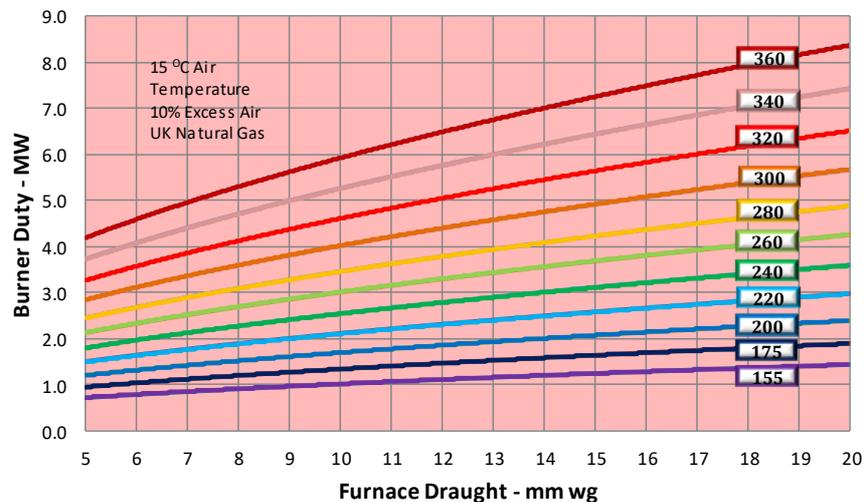




© Greens Combustion Limited – Nov 2022

GreenBurn® SAND

STAGED AIR NATURAL DRAUGHT

DATA SHEET

- > Low NOx / Staged Air Burner
- > Natural Draught / Multi-Fuel
- > Up or Side Fired
- > Round or Flat Flame

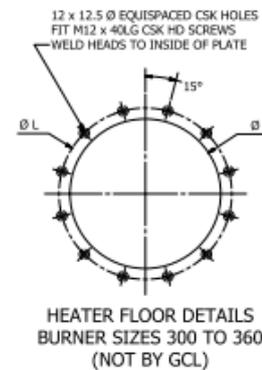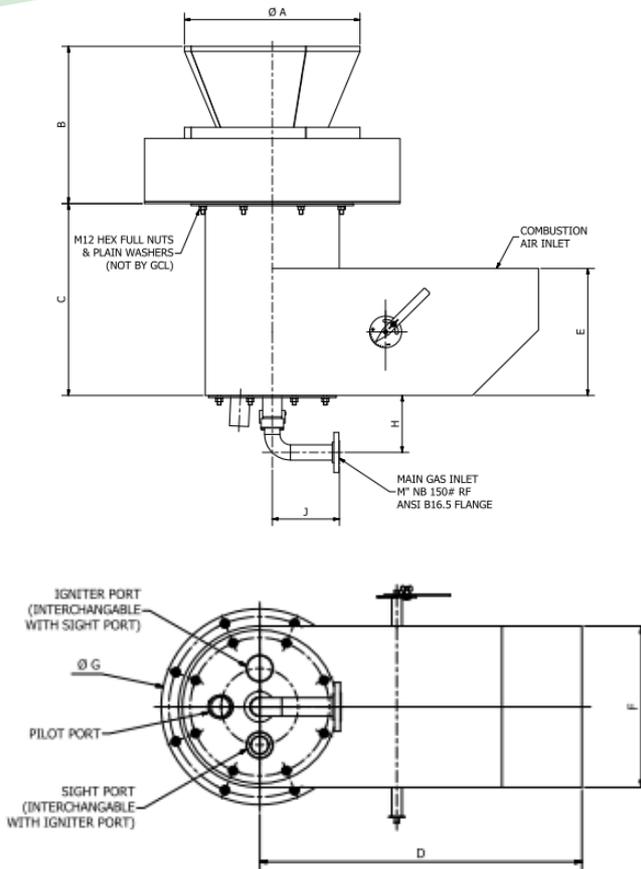

BURNER DIMENSIONS												
SIZE	A	B	C	D	E	F	G	H	J	K	L	M
155	448	439	502	652	332	350	440	160	175	340	400	1"
175	497	468	555	747	370	380	470	160	190	370	430	1"
200	550	497	607	834	402	420	510	180	210	410	470	1.1/2"
220	599	526	661	926	436	460	550	180	230	450	510	1.1/2"
240	647	554	712	1011	467	500	590	180	250	490	550	1.1/2"
260	695	583	765	1106	505	530	620	180	265	520	580	1.1/2"
280	739	607	808	1174	528	570	660	200	285	560	620	2"
300	788	636	860	1261	560	610	700	200	305	600	660	2"
320	835	664	913	1356	598	640	730	200	320	630	690	2"
340	884	692	966	1445	631	680	770	200	340	670	730	2"
360	932	720	1017	1530	662	720	810	200	360	710	770	2"



+44 (0)1202 607563
info@greenscombustion.com
www.greenscombustion.com

