



SOLID  
TO SUCCEED

SCISSOR LIFTS

# XG0508HA



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

# XG0508HA

## Scissor lifts


### FEATURES

#### PRODUCTIVITY

- 2 front driving wheels
- 25% theoretical gradeability
- Tilt alarm
- Hourmeter record
- Battery charge indicator and diagnostic display
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Front wheel multi-disc brakes
- Manual brake release
- Mobile pothole protection
- Lift and lower alarm
- Horn
- Flashing beacons
- Drive alarm
- Overload alarm

### OPTIONS

- Lithium battery
- Air-line to platform
- Load Alarm System
- Platform working light
- AC power to the platform
- Handle Protection Bracket
- Anti-collision protection system

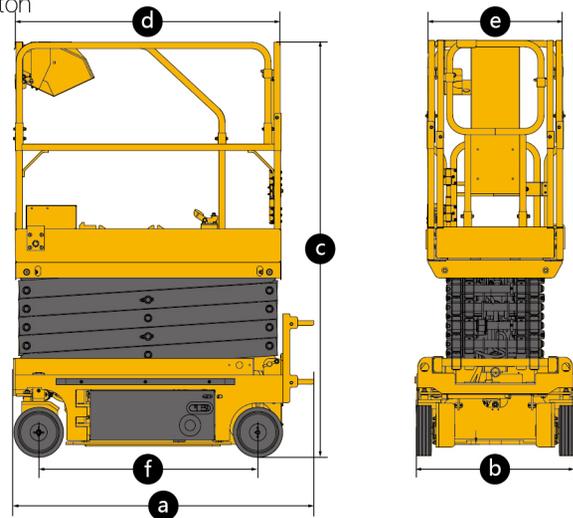

Item	Unit	XG0508HA
Lift capacity	kg	200
Lift capacity of auxiliary platform	kg	115
Occupant capacity(in/out)	-	1/0
Working height	m	5.5
Platform height	m	3.5
Length of auxiliary platform	mm	600
Ground clearance (pothole protector – raised/lowered)	mm	61/33
Turning radius (inside/outside)	m	0.45/1.6
Lift motor	kW	
Drive speed (retracted/extended)	km/h	3/0.5
Lift/Lower time	s	20-30/27-37
Gradeability	%	25
Tilt alarm (side/forward and backward)	°	1.5/3
Batteries	V/Ah	24/65-80
Charger	V/A	
Tires	-	280mm × 76mm
Weight	kg	830
a Length (without ladder)	mm	1568(1410)
b Width	mm	810
c Height (platform folded)	mm	1983(1621)
d x e Platform size (Length x Width)	mm	1372 × 702
f Wheelbase	mm	1130

SOLID TO SUCCEED