



# FIREPLAC® G-A2

Plasterboard non-combustible veneered with oak, UV varnished and certified as non-combustible in A2-s1-d0 combination.

incombustible 

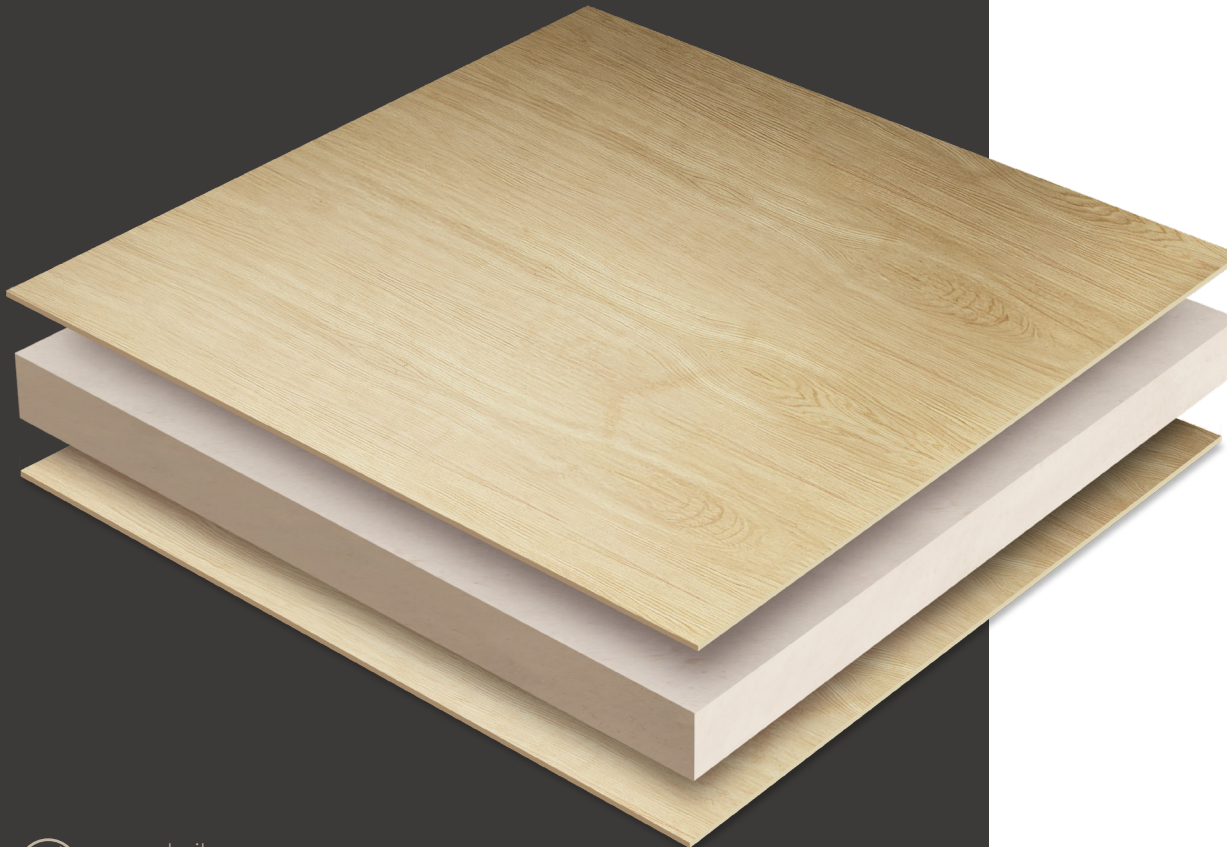

Especially suitable for  
ceilings; walls; furniture

## FIREPLAC® G-A2

	Recommended configuration	Individualisation
<b>CORE BOARD</b>		
Core board:	Plasterboard	
Core board thickness:	18 mm	see core board table
<b>FORMATS</b>		
Formats:	2600 x 1270 mm	see core board table, fixed dimensions possible
<b>VENEER GLUING</b>		
Veneer gluing:		
<b>VISIBLE SIDE</b>		
Veneer:	exclusively European oak (tested in combination)	140 wood species see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a> (ohne Prüfung im Verbund)
Quality:	A-First Quality	A-Pattern matching 5*, A, B, C: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Grading:	Half-crown cut	2 further grading types: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Bonding method:	Veneer book matched	6 further bonding methods see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Veneer thickness:	approx. 0,6 mm	
Surface processing:	Rough-ground (grain 120)	further surface processings: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Surface finishing:	UV-lacquered matt	5 further surface finishes: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
<b>REVERSE SIDE</b>		
Veneer:	ausschließlich Eiche euro (im Verbund geprüft)	140 wood species see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a> (ohne Prüfung im Verbund)
Quality:	B	A-First Quality, A, C, paper, factory selection: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Bonding method:	Veneer book matched	6 further bonding methods see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Veneer thickness:	approx. 0,6 mm	
Surface processing:	Rough-ground (grain 120)	further surface processings: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Surface finishing:	UV-lacquered matt	5 further surface finishes: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>

### CERTIFICATES

FSC® / PEFC / E1 / E0.5: Certificate depending on the product version

### ADDITIONAL INFORMATION

Non-combustible in combination tested: according to EN 13501-1.  
Test incl. veneer edge 0,5 mm. Classification: A2-s1, d0  
Volume weight 1250 kg/m³

The material wood is a natural product. Characteristic are color and structure differences. These natural features qualify the precious wood material as real and give it a unique beauty. Samples and illustrations can only serve as a guide.

Note: Please note that wood is a natural product. Irregularities in color and structure are a natural characteristic and are generally desirable. Please understand that samples and illustrations regarding color and structure can only be an indication.

### CONTACT OUR EXPERT TEAM

Röhr GmbH | Narzissenstr. 5  
88069 Tettnang | Deutschland

Tel. +49 7542 93660  
[info@europlac.com](mailto:info@europlac.com)