
europlac®

RILLO® d

RILLO® d stands for RILLO® deep: The groove milling is deeper than with the classic RILLO® variant and therefore gives a greater visual depth effect.





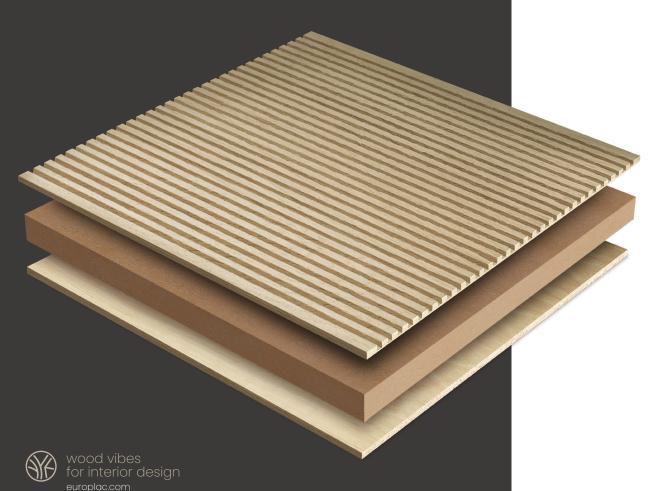

Especially suitable for ceilings; walls; furniture; shop fitting and exhibition stands



RILLO® d

	Recommended configuration	Individualisation
CORE BOARD		
Core board:	MDF	
Core board thickness:	12 mm	see core board table
FORMATS		
Formats:	3050 x 1220 mm	see core board table, customised format and fixed dimensions possible
VENEER GLUING		
Veneer gluing:	D3 (NAF) according to EN 204	D4 according to EN 204
VISIBLE SIDE		
Veneer:	European oak	140 wood species see www.europlac.com/customisation
Quality:	A	A-Pattern matching 5*, A-First Quality, B, C: see www.europlac.com/customisation
Bonding method:	Random matched SMOOTH	
Veneer thickness:	0,6 mm + 2,5 mm + 2,5 mm	
Surface processing:	Rough-ground (grain 120)	further surface processings: see www.europlac.com/customisation
Surface finishing:	Natural hard wax	5 further surface finishes: see www.europlac.com/customisation
Design:	Bar 5 mm x groove depth 4 mm	
REVERSE SIDE		
Veneer:	European oak	140 wood species see www.europlac.com/customisation
Quality:	В	A-First Quality, A, C, paper, factory selection: see www.europlac.com/customisation

CERTIFICATES

FSC® / PEFC / E1 / E0.5: Certificate depending on the product version

ADDITIONAL INFORMATION

No guarantee against warping.

Note: Please note that wood is a natural product. Irregularities in color and structure are a natural characteristic and are generally desirable. Please understand that samples and illustrations regarding color and structure can only be an indication.



RILLO® d



