


europacSPICA®

100% inspired by nature – Spica = the ear of corn.

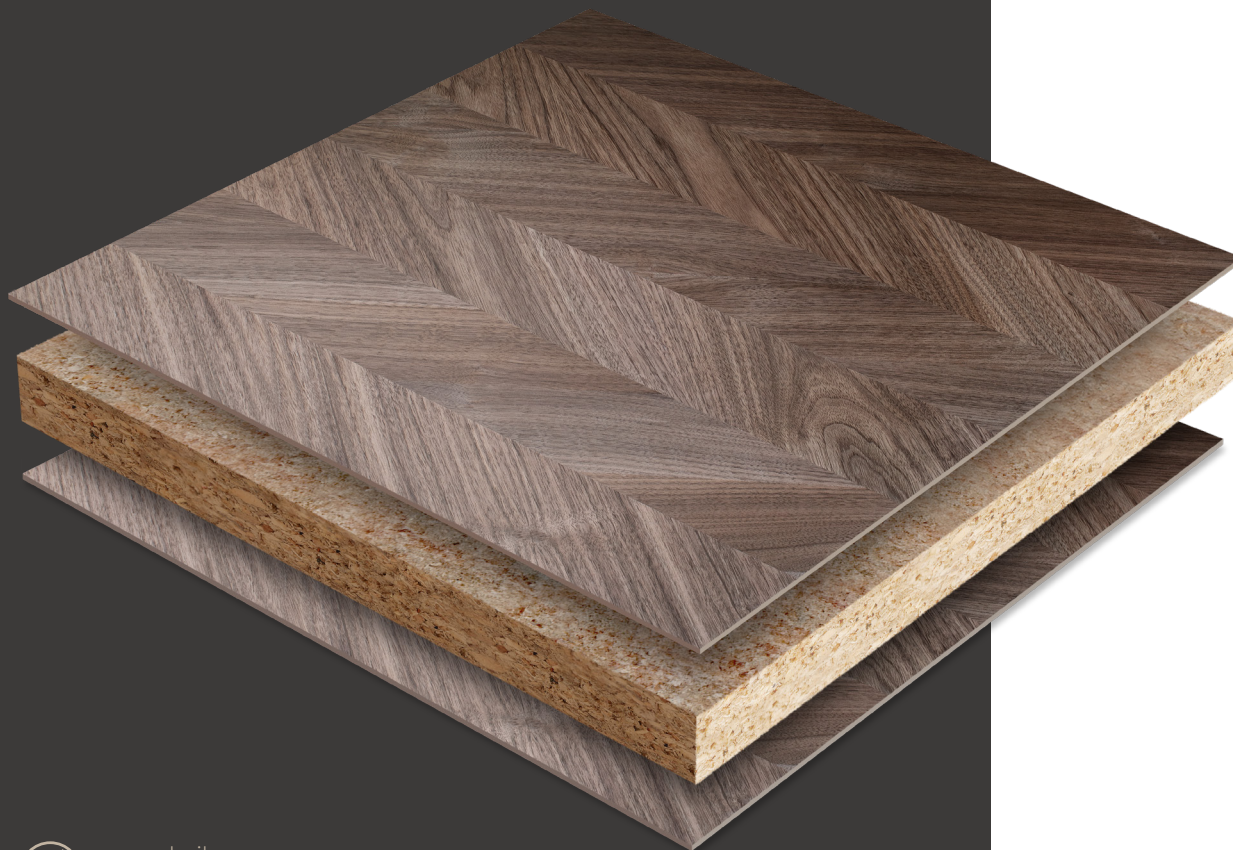


europac®

flame resistant core board



digital printing possible



Especially suitable for
walls

	Recommended configuration	Individualisation
CORE BOARD		
Core board:	Chipboard	all available core boards, see core board table
Core board thickness:	18 mm	see core board table
FORMATS		
Formats:	2500 x 1250 mm	see core board table, 3050 x 1250 mm, wide max. 1250 mm, customised format and fixed dimensions possible
VENEER GLUING		
Veneer gluing:	D3 (NAF) according to EN 204	D4 according to EN 204
VISIBLE SIDE		
Veneer:	Walnut	140 wood species see www.europlac.com/customisation
Quality:	A-First Quality	
Grading:	Half-crown cut	2 further grading types: see www.europlac.com/customisation
Bonding method:	"Herringbone" implemented in a modern way	
Veneer thickness:	approx. 0,6 mm	hardwoods approx. 0,6 mm, softwoods approx. 0,9 mm
Surface processing:	Rough-ground (grain 120)	further surface processings: see www.europlac.com/customisation
REVERSE SIDE		
Veneer:	Walnut	140 Wood species see www.europlac.com/customisation
Quality:	B	A-First Quality, A, C, paper, factory selection: see www.europlac.com/customisation
Bonding method:	Veneer book matched	6 further bonding methods see www.europlac.com/customisation
Veneer thickness:	approx. 0,6 mm	hardwoods approx. 0,6 mm, softwoods approx. 0,9 mm
Surface processing:	Rough-ground (grain 120)	further surface processings: see www.europlac.com/customisation

CERTIFICATES

FSC® / PEFC / E1 / E0.5: Certificate depending on the product version

ADDITIONAL INFORMATION

SPICA veneer width from 100 mm
 The material wood is a natural product. Characteristic are color and structure differences.
 These natural features qualify the precious wood material as real and give it a unique beauty.

Note: Please note that wood is a natural product. Irregularities in color and structure are a natural characteristic and are generally desirable. Please understand that samples and illustrations regarding color and structure can only be an indication.

CONTACT OUR EXPERT TEAM

Röhr GmbH | Narzissenstr. 5
 88069 Tettnang | Deutschland

Tel. +49 7542 93660
info@europlac.com