



## RILLO® FLEX

Through the design and processing of RILLO® FLEX, the creation of flexible forms with radii down to 150 mm is possible. The high-quality relief panels adapt to different requirements through their straight groove milling.

digital printing possible



pliable

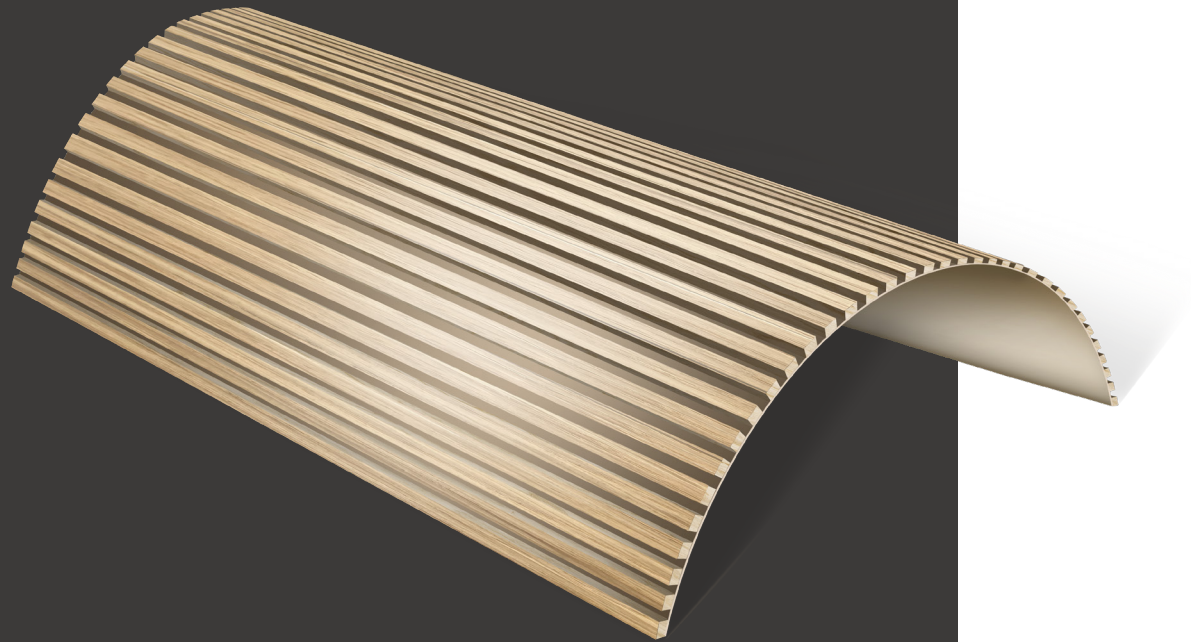

Especially suitable for  
ceilings; walls; furniture; shop fitting and exhibition stands

## RILLO® FLEX

	Recommended configuration	Individualisation
<b>CORE BOARD</b>		
Core board:	Fleece nature	
Core board thickness:	0,3 mm	
<b>FORMATS</b>		
Formats:	2500 x 1220 mm	3050 x 1250 mm
<b>VENEER GLUING</b>		
Veneer gluing:	D3 (NAF) according to EN 204	D4 according to EN 204
<b>VISIBLE SIDE</b>		
Veneer:	European oak	140 wood species see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Quality:	A	A-Pattern matching 5*, A-First Quality, B, C: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Bonding method:	Random matched SMOOTH	
Veneer thickness:	0,6 mm + 2,5 mm	
Surface processing:	Rough-ground (grain 120)	further surface processings: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Surface finishing:	-	Natural hard wax, 5 further surface finishes: see <a href="http://www.europlac.com/customisation">www.europlac.com/customisation</a>
Design:	Groove 5 mm, Bar 5 mm x groove depth 2 mm	

### CERTIFICATES

FSC® / PEFC / E1 / E0.5: Certificate depending on the product version

### ADDITIONAL INFORMATION

No guarantee against warping. Minimum radii of up to 150 mm possible.

Note: Please note that wood is a natural product. Irregularities in color and structure are a natural characteristic and are generally desirable. Please understand that samples and illustrations regarding color and structure can only be an indication.

### CONTACT OUR EXPERT TEAM

Röhr GmbH | Narzissenstr. 5  
 88069 Tettnang | Deutschland

Tel. +49 7542 93660  
[info@europlac.com](mailto:info@europlac.com)