



RILLO® FLEX

Through the design and processing of RILLO® FLEX, the creation of flexible forms with radii down to 150 mm is possible. The high-quality relief panels adapt to different requirements through their straight groove milling.

digital printing possible



pliable

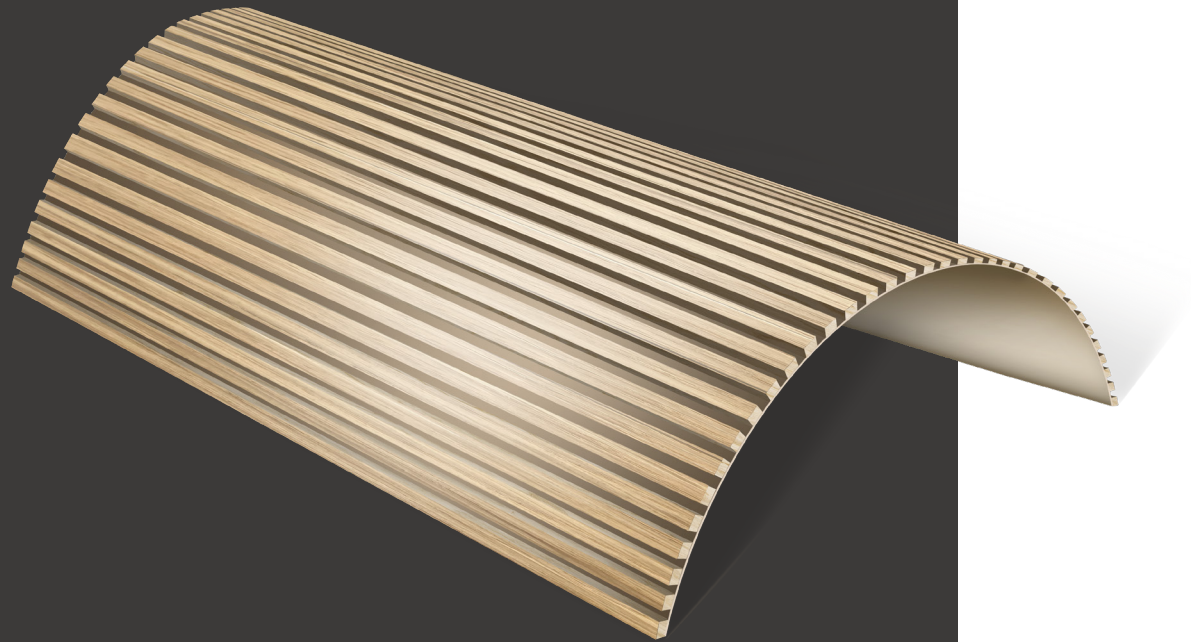

Especially suitable for
ceilings; walls; furniture; shop fitting and exhibition stands

RILLO® FLEX

| | Recommended configuration | Individualisation |
|-----------------------|---|--|
| CORE BOARD | | |
| Core board: | Fleece nature | |
| Core board thickness: | 0,3 mm | |
| FORMATS | | |
| Formats: | 2500 x 1250 mm | 3050 x 1250 mm |
| VENEER GLUING | | |
| Veneer gluing: | D3 (NAF) according to EN 204 | D4 according to EN 204 |
| VISIBLE SIDE | | |
| Veneer: | European oak | 140 wood species see www.europlac.com/customisation |
| Quality: | A | A-Pattern matching 5*, A-First Quality, B, C: see www.europlac.com/customisation |
| Bonding method: | Random matched SMOOTH | |
| Veneer thickness: | 0,6 mm + 2,5 mm | |
| Surface processing: | Rough-ground (grain 120) | further surface processings: see www.europlac.com/customisation |
| Surface finishing: | - | Natural hard wax, 5 further surface finishes: see www.europlac.com/customisation |
| Design: | Groove 5 mm, Bar 5 mm x groove depth 2 mm | |

CERTIFICATES

FSC® / PEFC / E1 / E0.5: Certificate depending on the product version

ADDITIONAL INFORMATION

No guarantee against warping. Minimum radii of up to 150 mm possible.

Note: Please note that wood is a natural product. Irregularities in color and structure are a natural characteristic and are generally desirable. Please understand that samples and illustrations regarding color and structure can only be an indication.

CONTACT OUR EXPERT TEAM

Röhr GmbH | Narzissenstr. 5
 88069 Tettnang | Deutschland

Tel. +49 7542 93660
info@europlac.com