
RILLO® FLEX

Through the design and processing of RILLO® FLEX, the creation of flexible forms with radii down to 150 mm is possible. The high-quality relief panels adapt to different requirements through their straight groove milling.

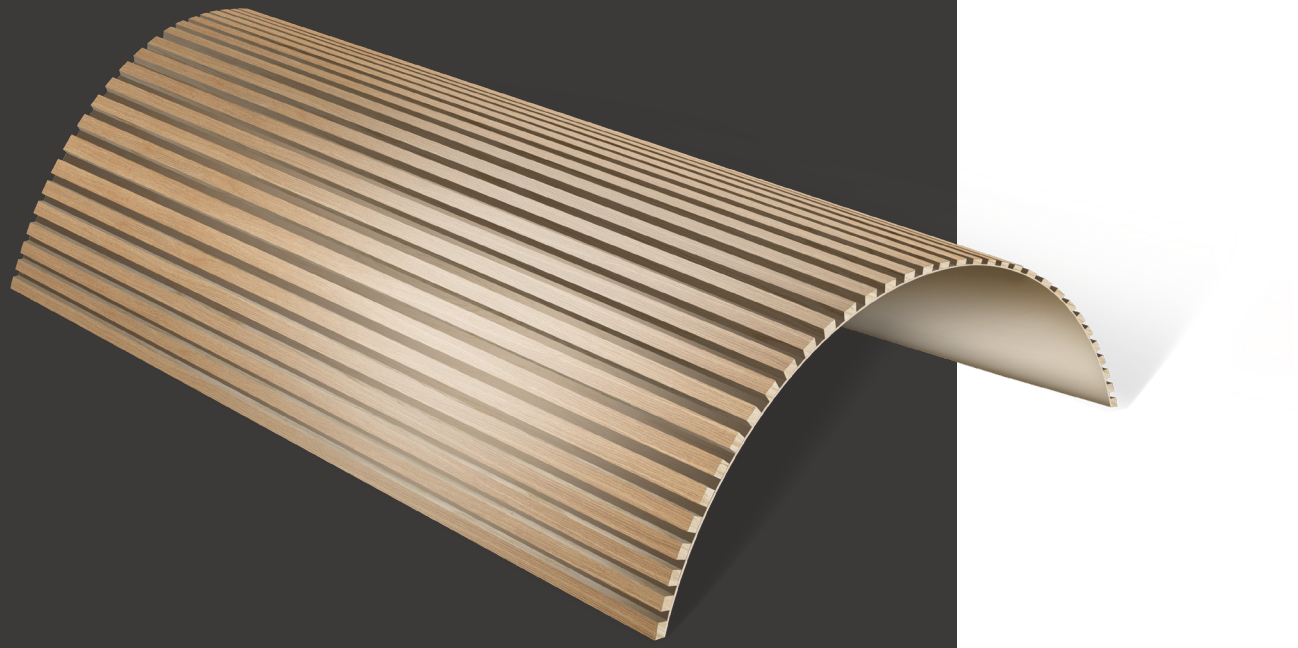


wood vibes
for interior design
europlac.com

europlac®

digital printing possible

pliable



Especially suitable for
ceilings; walls; furniture; shop fitting and exhibition stands

RILLO® FLEX

	Recommended configuration	Individualisation
CORE BOARD		
Core board:	Fleece nature	
Core board thickness:	0,3 mm	
FORMATS		
Formats:	2500 x 1250 mm	3050 x 1250 mm
VENEER GLUING		
Veneer gluing:	D3 (NAF) according to EN 204	D4 according to EN 204
VISIBLE SIDE		
Veneer:	European oak	140 wood species see www.europlac.com/customisation
Quality:	A	A-Pattern matching 5*, A-First Quality, B, C: see www.europlac.com/customisation
Bonding method:	Random matched SMOOTH	
Veneer thickness:	0,6 mm + 2,5 mm	
Surface processing:	Rough-ground (grain 120)	
Design:	Groove 5 mm, Bar 5 mm x groove depth 2 mm	

CERTIFICATES

FSC® / PEFC / E1 / E0.5: Certificate depending on the product version

ADDITIONAL INFORMATION

No guarantee against warping. Minimum radii of up to 150 mm possible.

Note: Please note that wood is a natural product. Irregularities in color and structure are a natural characteristic and are generally desirable. Please understand that samples and illustrations regarding color and structure can only be an indication.

CONTACT OUR EXPERT TEAM

Röhr GmbH | Narzissenstr. 5
88069 Tettnang | Deutschland

Tel. +49 7542 93660
info@europlac.com