



STATEMENT OF COMPLIANCE

No RTD0/OCN/20250716113754

Special Requirements for Ships carrying Dangerous Goods

Issued in pursuance of the requirement of Regulation II-2/19.4 of the International Convention for the Safety of Life at Sea, 1974, as amended

By BUREAU VERITAS MARINE & OFFSHORE

| Name of Ship BV No : 43864F | Distinctive Number or Letters | Port of Registry | Ship Type | IMO Number |
|---------------------------------------|----------------------------------|------------------|-----------------------|------------|
| WAALVLIET | PBHQ - | RHOON | General cargo ship | 9996874 |

THIS IS TO CERTIFY:

1. That the construction and equipment of the above mentioned ship was found to comply with the provisions of Regulation II-2/19.3 of the International Convention for the Safety of Life at Sea, 1974, as amended; and
2. That the ship is suitable for carriage of those classes of dangerous goods as specified in the appendix hereto, subject to any provisions in the International Maritime Dangerous Goods (IMDG) Code and the International Maritime Solid Bulk Cargoes (IMSBC) Code for individual substances also being complied with.

This statement is valid until **13 September 2025**

Completion date of the survey on which this statement is based : 14 April 2025

Issued at Rotterdam, on the 17 July 2025

- Carriage requirements of individual schedules of solid bulk cargoes apply.
- The carriage of solid bulk cargoes is only permitted with all hatch covers of the cargo hold in closed position

**BUREAU VERITAS
MARINE & OFFSHORE**

O. Caner



This document is electronically signed and does not require a manual signature as defined in IMO guideline FAL.5-Circ.39.

[Click here for the verification website](#)




By Order of the Secretary

Note : There are no special requirements in above mentioned Regulation II-2/19 for the carriage of dangerous goods of Classes 6.2 and 7 and for the carriage of dangerous goods in limited quantities, as required in Chapter 3.4 of the IMDG Code, and excepted quantities, as required in chapter 3.5 of the IMDG Code.


APPENDIX TO STATEMENT OF COMPLIANCE
No: RTD0/OCN/20250716113754

SPACES TO BE INDICATED IN PLAN WITH NUMBERS
CORRESPONDING WITH TABLE

| | | | | |
|---------------------------------------|----------------------------------|------------------|-----------------------|------------|
| Name of Ship BV No : 43864F | Distinctive Number or Letters | Port of Registry | Ship Type | IMO Number |
| WAALVLIET | PBHQ - | RHOON | General cargo ship | 9996874 |




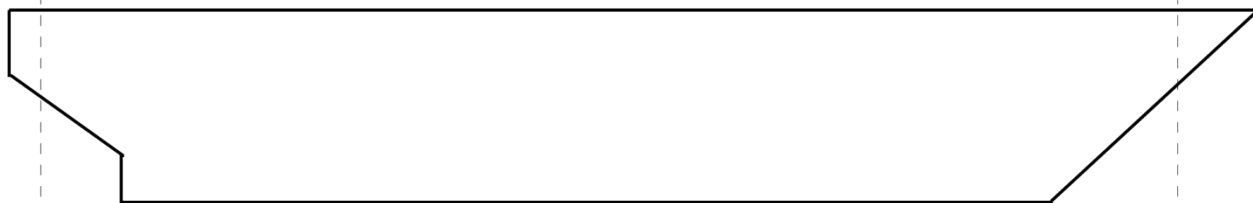


UNDERDECK SPACES

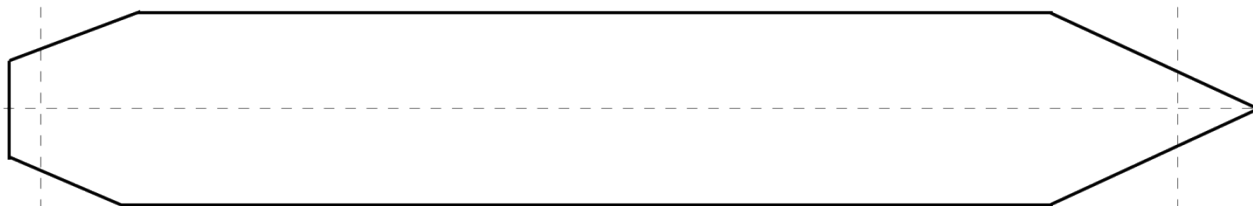

ON DECK SPACES

See attached plan in annex

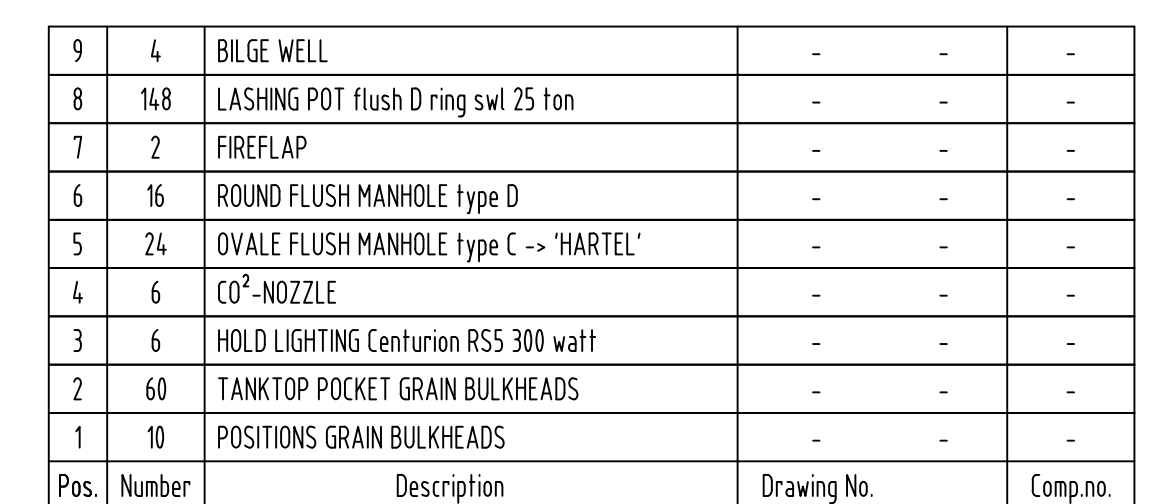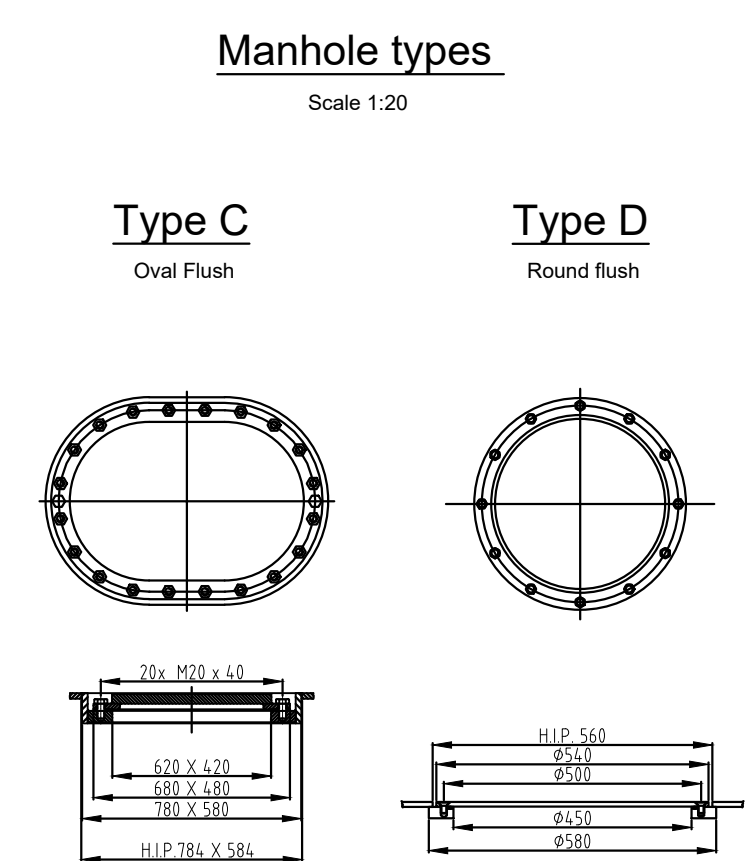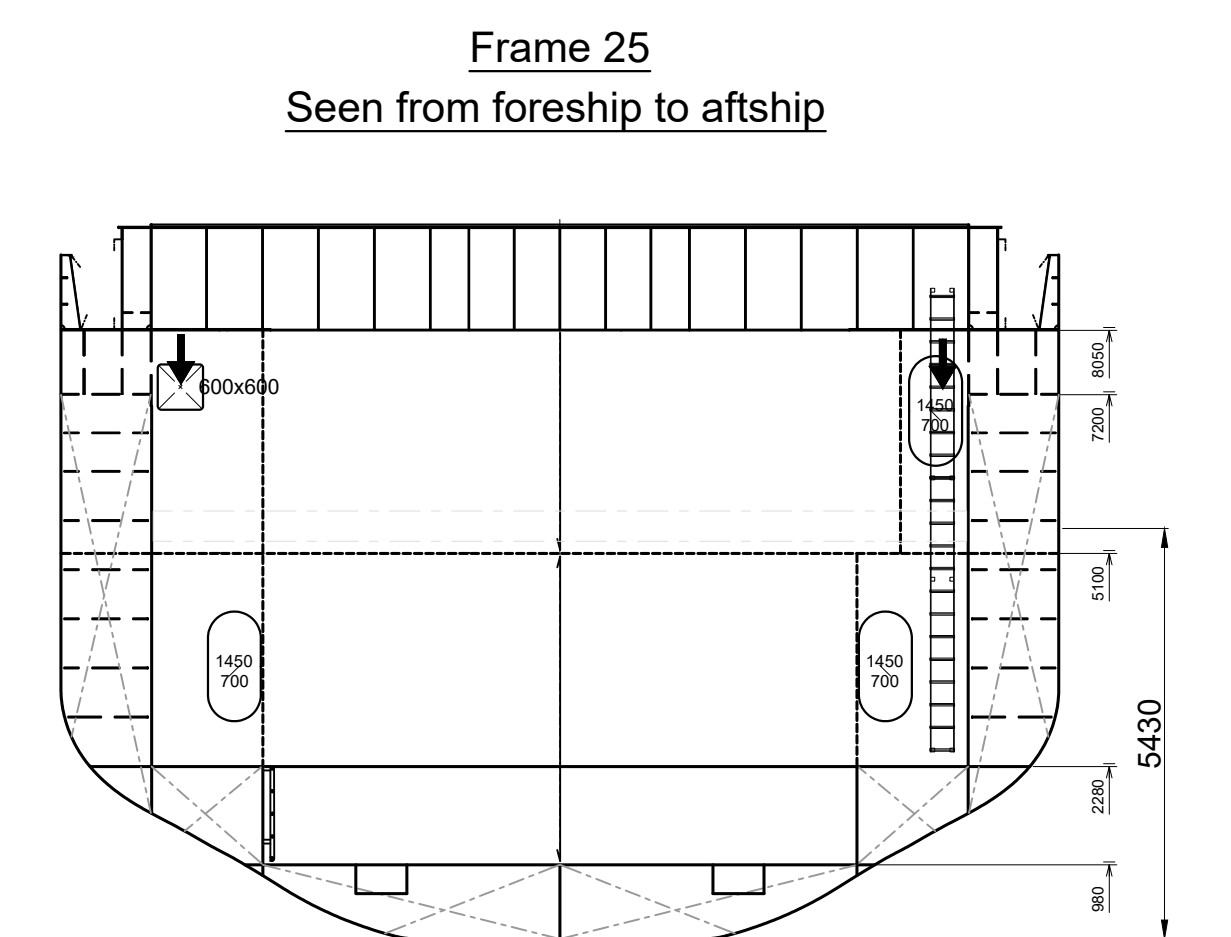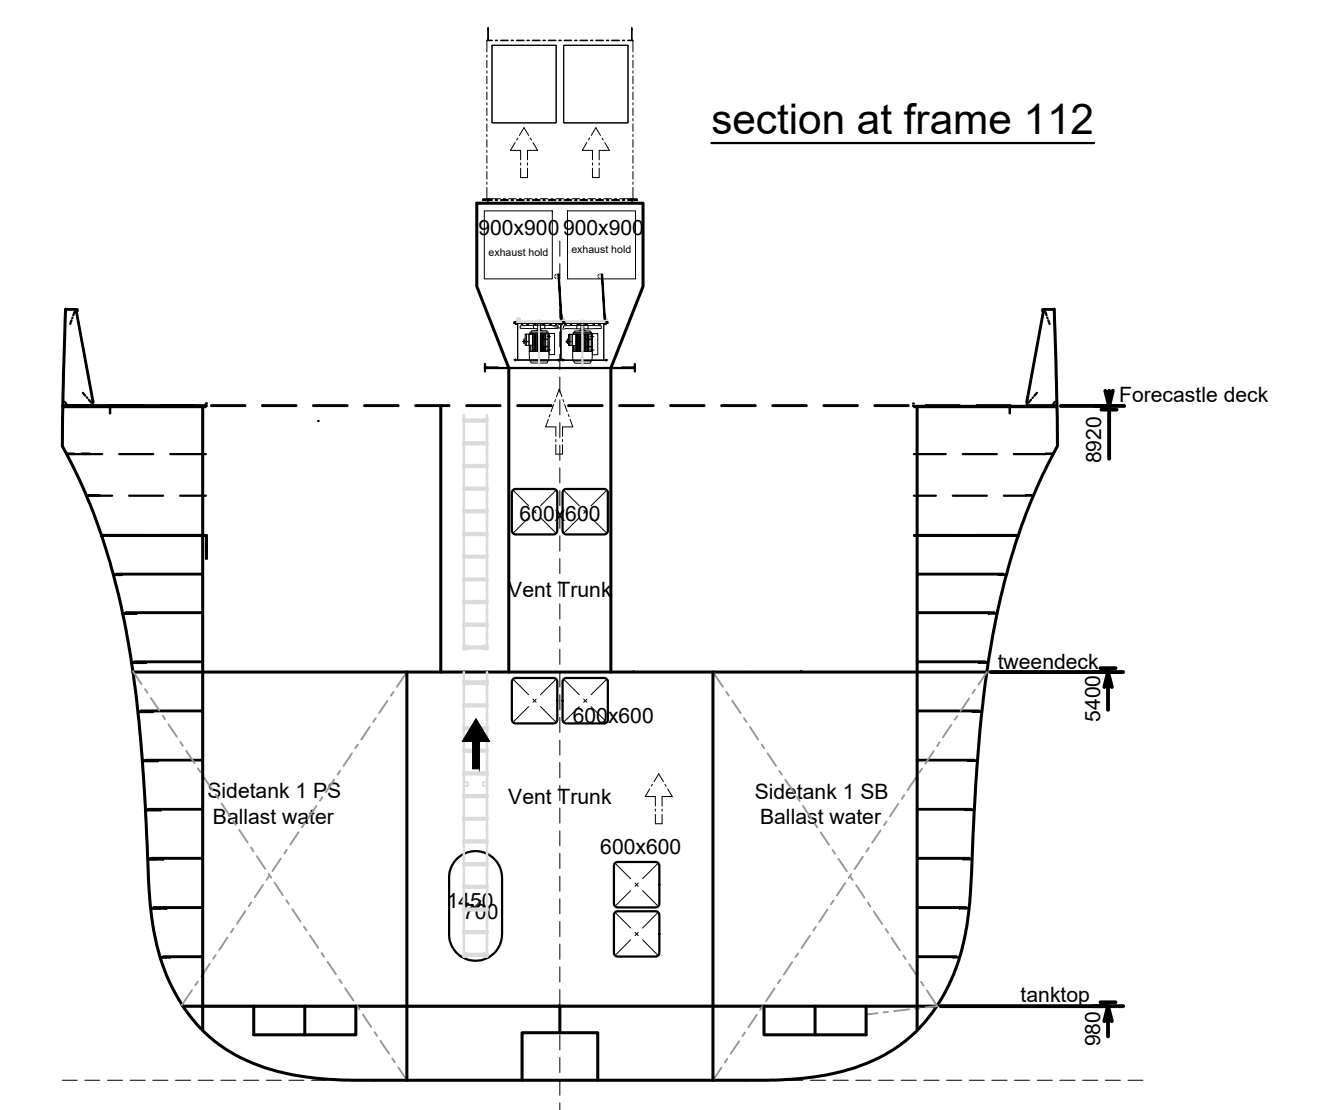

| | | | |
|---|-----------------|---|-------------------------|
|  | | COPYRIGHT CONSHIP INTERNATIONAL B.V. 2009. All rights reserved. This document or any other material may not be made public, or disclosed, copied or otherwise reproduced or used in any form or by any means, including, but not limited to, use hereto for the design and manufacturing of a product, without a written consent of the licensor. Similar or derived documents and specifications, without prior written consent of Conship International B.V. P.O. Box 6929 - GRONINGEN - THE NETHERLANDS | |
| | | DRAWING NO. I22-362-3170 | |
| DESCRIPTION <div style="text-align: center; font-size: 1.2em; font-weight: bold;">Hold arrangement</div> | | | |
| SCALE 1:100 | SIZE: A0 | YARD NO. I22-362 | VERSION: 00 |
| DRAWN BY: HLH | | DATE: 30-11-2022 | APPROVED BY: RB |
| | | DATE: 30-11-2022 | DATE: 30-11-2022 |

APPENDIX 1 TO STATEMENT OF COMPLIANCE
LIST OF CARGOES

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754
NAME OF SHIP : WAALVLIET
BV REGISTER : 43864F

Caption used in the next table(s) for the carriage of goods:

Y indicates CARGO ALLOWED

X indicates NOT ALLOWED

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|--|-------|--------------------|---------|-------------------|
| Alfalfa | | | C | Y ₁ |
| Alumina | | | C | Y |
| Alumina hydrate | | MHB (CR) | A and B | Y |
| Alumina silica | | | C | Y |
| Alumina silica, pellets | | | C | Y |
| Alumina, calcinated | | | C | Y |
| Aluminium Ferrosilicon powder | 1395 | 4.3 sub 6.1 | B | Y _{2, 3} |
| Aluminium fluoride | | | A | Y |
| Aluminium nitrate | 1438 | 5.1 | B | Y |
| Aluminium silicon powder, uncoated | 1398 | 4.3 | B | Y _{2, 3} |
| Aluminium smelting /remelting by products, processed | | MHB (WF / WT / CR) | A and B | Y _{3, 4} |
| Aluminium smelting by-products or aluminum remelting by products | 3170 | 4.3 | B | Y _{2, 3} |
| Ammonium nitrate | 1942 | 5.1 | B | Y _{3, 5} |
| Ammonium nitrate based fertilizer | 2067 | 5.1 | B | Y _{3, 5} |
| Ammonium nitrate based fertilizer | 2071 | 9 | B | Y _{3, 6} |
| Ammonium nitrate based fertilizer MHB | | MHB (OH) | B | Y ₃ |
| Ammonium nitrated based fertilizer | | | C | Y ₃ |
| Ammonium sulphate | | | C | Y |
| Amorphous sodium silicate lumps | | MHB (CR) | B | Y |
| Antimony ore and residue | | | C | Y |
| Barium nitrate | 1446 | 5.1 sub 6.1 | B | Y |
| Baryte, flotation chemical grade | | | A | Y |
| Barytes | | | C | Y |
| Bauxite | | | C | Y |
| Bauxite fines | | | A | Y |
| Biosludge | | | C | Y |
| Borax (pentahydrate crude) | | | C | Y |
| Borax, anhydrous | | | C | Y |
| Boric acid | | MHB (TX) | B | Y |
| Brown coal briquettes | | MHB (CB and/or SH) | B | X |
| Brown fused alumina | | | C | Y |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|---|-------|--------------------|----------|--------------------|
| Brucite | | | C | Y |
| Calcium fluoride, Calcium sulphate, Calcium carbonate mixture | | | A | Y |
| Calcium nitrate | 1454 | 5.1 | B | Y |
| Calcium nitrate fertilizer | | | C | Y |
| Carborundum | | | C | Y |
| Castor Beans or castor meal or castor pomace or castor flake | 2969 | 9 | B | Y ₇ |
| Cement | | | C | Y |
| Cement clinkers | | | C | Y |
| Chamotte | | | C | Y |
| Charcoal | | MHB (CB and/or SH) | B | Y ₈ |
| Chemical gypsum | | | A | Y |
| Chlorite | | | C | Y |
| Chopped rubber and plastic insulation | | | C | Y ₉ |
| Chrome pellets | | | C | Y |
| Chromite ore | | | C | Y |
| Clam shell | | | C | Y |
| Clay | | | C | Y |
| Clinker ash | | MHB (TX) | A and B | Y |
| Coal | | MHB (CB/SH/WF/CR) | B(and A) | X |
| Coal slurry | | | A | Y |
| Coal tar pitch | | MHB (TX and/or CR) | B | Y |
| Coarse chopped tyres | | | C | Y ₁₀ |
| Coarse iron and steel slag and its mixture | | | C | Y |
| Coke | | | C | Y |
| Coke breeze | | | A | Y |
| Colemanite | | | C | Y |
| Copper granules | | | C | Y |
| Copper matte | | | C | Y |
| Copper slag | | | A | Y |
| Copra (dry) | 1363 | 4.2 | B | Y ₁₁ |
| Crushed carbon anodes | | | C | Y |
| Crushed granodiorite fines | | | A | Y |
| Cryolite | | | C | Y |
| Diammonium Phosphate (D.A.P) | | | C | Y |
| Direct reduced iron (A) Briquettes, hot-moulded | | MHB (SH and/or WF) | B | Y _{3, 12} |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|--|-------|--------------------|---------|------------------------|
| Direct reduced iron (B) Lumps, pellets, cold-moulded briquettes | | MHB (SH and/or WF) | B | Y _{3, 13} |
| Direct reduced iron (C) (By-products fines) | | MHB (SH and/or WF) | B | Y _{3, 31} |
| Direct reduced iron (D) (By-product fines with moisture content of at least 2%) | | MHB (SH and/or WF) | A and B | Y _{3, 28, 29} |
| Distillers dried grains with solubles | | | C | Y |
| Dolomite | | | C | Y |
| Dunite | | | C | Y |
| Dunite Fines | | | A | Y |
| Electric arc furnace dust, pelletized | | MHB (TX and CR) | A and B | Y |
| Felspar lump | | | C | Y |
| Ferrochrome | | | C | Y |
| Ferrochrome, exothermic | | | C | Y |
| Ferromanganese | | | C | Y |
| Ferronickel | | | C | Y |
| Ferronickel slag (granulated) | | | C | Y |
| Ferrophosphorus (including briquettes) | | MHB (WF and/or WT) | B | Y ₃ |
| Ferrosilicon with 25% to 30% silicon or 90% or more silicon (including briquettes) | | MHB (WF and/or WT) | B | Y _{3, 14} |
| Ferrosilicon with 30% or more but less than 90% silicon (including briquettes) | 1408 | 4.3 sub 6.1 | B | Y _{3, 15} |
| Ferrous metal borings, shavings, turning or cuttings | 2793 | 4.2 | B | Y |
| Ferrous sulphate heptahydrate | | | C | Y |
| Fertilizers without nitrates (non-hazardous) | | | C | Y |
| Fish (in bulk) | | | A | Y |
| Fish Meal (fish scrap), stabilized, anti-oxidant treated | | MHB (SH) | B | Y ₃₀ |
| Flue dust, containing lead and zinc | | MHB (TX and/or CR) | A and B | Y |
| Fluorspar | | MHB (TX) | A and B | Y |
| Fly ash, dry | | | C | Y |
| Fly ash, wet | | | A | Y |
| Foam glass gravel | | | C | Y |
| Glass cullet | | | C | Y |
| Grain screening pellets | | | C | Y ₁₆ |
| Granular ferrous sulphate | | | C | Y |
| Granulated nickel matte (less than 2% moisture content) | | MHB (TX and/or CR) | B | Y |
| Granulated slag | | | C | Y |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|--|-------|--------------------|---------|-----------------|
| Granulated tyre rubber | | | C | Y ₁₇ |
| Ground granulated blast furnace slag powder | | | A | Y |
| Gypsum | | | C | Y |
| Gypsum granulated | | | C | Y |
| Ilmenite (rock) | | | C | Y |
| Ilmenite (upgraded) | | | A | Y |
| Ilmenite clay | | | A | Y |
| Ilmenite sand | | | A or C | Y |
| Iron and steel slag and its mixture | | | A | Y |
| Iron ore | | | C | Y |
| Iron ore fines | | | A | Y |
| Iron ore pellets | | | C | Y |
| Iron oxide technical | | | A | Y |
| Iron oxide, spent or iron sponge, spent | 1376 | 4.2 | B | Y ₁₈ |
| Iron sinter | | | C | Y |
| Iron smelting by-products | | | C | Y |
| Ironstone | | | C | Y |
| Labradorite | | | C | Y |
| Leach residue containing lead | | MHB (TX and CR) | A and B | Y |
| Lead nitrate | 1469 | 5.1 sub 6.1 | B | Y |
| Lead ore | | | C | Y |
| Lime (unslaked) | | MHB (SH and/or CR) | B | Y |
| Limestone | | | C | Y |
| Linted cotton seed with no more than 9% moisture and not more than 20.5% oil | | MHB (SH) | B | Y |
| Magnesia (deadburned) | | | C | Y ₁₉ |
| Magnesia (unslaked) | | MHB (SH and/or CR) | B | Y |
| Magnesite fines | | | A | Y |
| Magnesite, natural | | | C | Y |
| Magnesium nitrate | 1474 | 5.1 | B | Y |
| Magnesium sulphate fertilizers | | | C | Y |
| Manganese component ferroalloy slag | | | C | Y |
| Manganese ore | | | C | Y |
| Manganese ore fines | | | A | Y |
| Marble chips | | | C | Y |
| Matte containing copper and lead | | MHB (TX and/or CR) | B | Y |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|---|-------|--------------------|---------|------------|
| Metal sulphide concentrates | | MHB (SH/TX/CR) | A and B | Y |
| Metal sulphide concentrates, corrosive | 1759 | 8 | A and B | Y |
| Metal sulphide concentrates, self-heating | 3190 | 4.2 | A and B | X |
| Mineral concentrates | | | A | Y |
| Monoammonium phosphate (M.A.P) | | | C | Y |
| Monoammonium phosphate (M.A.P), mineral enriched coating | | MHB (CR) | B | Y |
| Monocalciumphosphate (MCP) | | MHB (CR) | A and B | Y |
| Nickel ore | | | A | Y |
| Olivine granular and gravel aggregate products | | | C | Y |
| Olivine sand | | | A | Y |
| Peanuts (in shell) | | | C | Y |
| Peat moss | | MHB (CR) | A and B | Y |
| Pebbles (sea) | | | C | Y |
| Pellets (concentrates) | | | C | Y |
| Perlite rock | | | C | Y |
| Petroleum coke (calcined or uncalcined) | | MHB (SH) | B | Y |
| Phosphate (defluorinated) | | | C | Y |
| Phosphate rock (calcinated) | | | C | Y |
| Phosphate rock (uncalcinated) | | | C | Y |
| Pig iron | | | C | Y |
| Pitch prill | | MHB (CB and/or CR) | B | Y |
| Potash | | | C | Y |
| Potassium chloride | | | C | Y |
| Potassium nitrate | 1486 | 5.1 | B | Y |
| Potassium Nitrate | | | C | Y |
| Potassium sulphate | | | C | Y |
| Pumice | | | C | Y |
| Pyrite (containing copper and iron) | | | C | Y |
| Pyrites, calcinated (calcinated pyrites) | | MHB (TX and/or CR) | A and B | Y |
| Pyrophyllite | | | C | Y |
| Quartz | | | C | Y |
| Quartzite | | | C | Y |
| Radioactive material, low specific activity (LSA-1), non fissile or fissile-excepted | 2912 | 7 | B | X |
| Radioactive material, surface contaminated objects (SCO-I), non fissile or fissile-excepted | 2913 | 7 | B | X |
| Rasorite (anhydrous) | | | C | Y |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|--|-------|----------------------|---------|--------------------|
| Rutile sand | | | C | Y |
| Salt | | | C | Y |
| Salt cake | | | C | Y |
| Salt rock | | | C | Y |
| Sand | | | C | Y |
| Sand, heavy mineral | | | A | Y |
| Sand, mineral concentrate, radioactive material, low specific activity (LSA-I) | 2912 | 7 | A and B | X |
| Sawdust | | MHB (CB) | B | Y ₂₀ |
| Scale generated from the iron and steel making process | | | A | Y |
| Scrap metal | | | C | Y |
| Seed cake with not more than 1.5% oil and not more than 11% moisture | 2217 | 4.2 | B | Y _{3, 21} |
| Seed cake, containing vegetable oil (a), mechanically expelled seeds, containing more than 10% of oil or more than 20% of oil and moisture combined | 1386 | 4.2 | B | Y |
| Seed cake, containing vegetable oil (b) solvent extractions and expelled seeds, containing not more than 10% of oil and when the amount of moisture is higher than 10%, not more than 20% of oil and moisture combined | 1386 | 4.2 | B | Y _{3, 21} |
| Seed cakes and other residues of processed oily vegetables (group B) | | MHB (SH) | B | Y ₃ |
| Seed cakes and other residues of processed oily vegetables (group C) | | | C | Y ₂₂ |
| Silicomanganese (carbo-thermic) | | | C | Y |
| Silicomanganese (low carbon) | | MHB (WF/WT/TX) | B | Y _{3, 23} |
| Silicon slag | | | C | Y |
| Soda ash (Dense and light) | | | C | Y |
| Sodium nitrate | 1498 | 5.1 | B | Y |
| Sodium nitrate | | | C | Y |
| Sodium nitrate and potassium nitrate mixture | | | C | Y |
| Sodium nitrate and potassium nitrate mixture | 1499 | 5.1 | B | Y |
| Solidified fuels recycled from paper and plastics | | MHB (SH) | B | Y ₂₄ |
| Spodumene (upgraded) | | | A | Y |
| Stainless steel grinding dust | | | C | Y |
| Stone chippings | | | C | Y |
| Sugar | | | C | Y |
| Sugarcane biomass pellets | | MHB (CB, WT, WF, OH) | B | Y ₂₅ |
| Sulphate of potash and magnesium | | | C | Y |
| Sulphur (crushed lump and coarse grained) | 1350 | 4.1 | B | Y _{3, 26} |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

| CARGO SHIPPING NAME | UN No | CLASS | GROUP | CARGO HOLD |
|--|-------|--------------------|---------|-----------------|
| Sulphur (formed, solid) | | | C | Y |
| Superphosphate | | | C | Y |
| Superphosphate (triple, granular) | | MHB (CR) | B | Y |
| Synthetic calcium fluoride | | | A | Y |
| Synthetic silicon dioxide | | | A | Y |
| Taconite pellets | | | C | Y |
| Talc | | | C | Y |
| Tankage | | MHB (SH and/or OH) | B | Y |
| Tapioca | | | C | Y |
| Titanomagnetite sand | | | A | Y |
| Urea | | | C | Y |
| Vanadium ore | | MHB (TX) | B | Y |
| Vermiculite | | | C | Y ₂₇ |
| White quartz | | | C | Y |
| Wood pellets containing additives and/or binders | | MHB (WF) | B | Y |
| Wood pellets not containing any additives and/or binders | | MHB (OH) | B | Y |
| Wood products - general | | | B | Y |
| Wood torrefied | | MHB (CB/SH/CR) | B | Y |
| Woodchips | | MHB (CB) | B | Y |
| Zinc ashes | 1435 | 4.3 | B | Y ₃ |
| Zinc oxide enriched flue dust | | | A and B | Y |
| Zinc slag | | | A | Y |
| Zircon kyanite concentrate | | | A | Y |
| Zirconsand | | | C | Y |

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

Notes applicable for this document:

- (1) Prior to loading of this cargo, a certificate shall be provided by a competent authority or shipper stating that the material as shipped does not meet the requirement for Seed cake
- (2) Prior to loading this cargo a certificate shall be provided by the manufacturer or shipper stating that, after manufacture, the material was stored under cover, but exposed to the weather in the particle size shipped, for not less than 3 days prior the shipment
- (3) Electrical equipment which is not essential for the safety and operation of the ship and which is not of a type approved for use in the considered area shall be:
 - completely disconnected by appropriate means other than fuses at a point external to the space
 - protected against unauthorized re-connection
- (4) Prior to loading this cargo a weathering certificate shall be provided by the manufacturer or shipper stating that, after manufacture, the material was stored under cover, but exposed to the weather in the particle size shipped, for not less than 4 WEEKS prior the shipment
- (5) Prior to loading, the shipper shall provide the master with a certificate signed by the shipper stating that all the relevant conditions of the cargo required by this code including its individual schedule have been met . In addition, prior to loading, the shipper shall provide the master with a certificate stating that the resistance to detonation of this material is in compliance with this requirements
- (6) This cargo shall only be accepted for loading when, as a results of testing in the trough test, its liability to self-sustaining decomposition shows decomposition rate not greater than 0.25m/h
- (7) Castor meal, castor pomace and castor flakes shall not be carried in bulk
- (8) The manufacturer or shipper shall give the master a certificate stating that the cargo is not class 4.2 in accordance with the results of the test approved b the competent authority. The certificate shall also state that this cargo has been weathered for not less than 13 days. This cargo shall only be accepted for loading when the actual moisture content of the cargo is not more than 10%
- (9) Prior to shipment, a certificate shall be given to the master by the shipper stating that this cargo consists of clean plastic and rubber material only.
- (10) Prior to shipment, a certificate shall be given to the master by the shipper stating that this cargo is free of oily products or oily residue and has been stored under cover but in the open air for not less than 15 days prior shipment.
- (11) This cargo shall only be accepted for loading when the cargo has been weathered for at least one month before shipment or when the shipper provides the master with certificate issued by a person recognized by the competent authority of the country of origin stating that the moisture content of the cargo is not more than 5%
- (12) The shipper shall provide the master with a certificate issued by a competent person recognized by the national Administration of the port of loading stating that the cargo, at the time of loading, is suitable for shipment and that it conforms with the requirements of IMSBC Code; that the quantity of fines and small particles (up to 6.35 mm in size) is no more than 5% by weight; the moisture content is less than 1.0% and the temperature does not exceed 65°C. After loading, a certificate, confirming that throughout the whole consignment the fines and small particles (under 6.35 mm in size) do not exceed 5% by weight, shall be issued by a competent person recognized by the national administration of the port of loading.
- (13) Prior to loading this cargo, the shipper shall provide the master with a certificate issued by a competent person recognized by the national Administration of the port of loading stating that the cargo, at the time of loading, is suitable for shipment, and that it conforms with the requirements of IMSBC Code; that the quantity of fines and small particles is no more than 5% by weight; that the moisture content is less than 0.3%; and that the temperature does not exceed 65°C. This certificate shall state the date of manufacture for each lot of cargo to be loaded in order to meet the loading criteria in regards to ageing and material temperature. After loading, a certificate shall be issued by a competent person recognized by the national Administration of the port of loading, confirming that, throughout the whole consignment, fines and small particles (under 6.35 mm in size) do not exceed 5% by weight, that the moisture content has not exceeded 0.3% and the temperature does not exceed 65°C. Provision shall be made to introduce a dry, inert gas at tank-top level so that the inert gas purges the air from the cargo and fills the free volume above prior to loading and to maintain the oxygen concentration below 5% throughout the voyage in accordance with the requirements of IMSBC.
- (14) The manufacturer or the shipper shall provide the master with a certificate stating that, after manufacture, the cargo was stored under cover, but exposed to open air for not less than three days prior to shipment.
- (15) The manufacturer or the shipper shall provide the master with a certificate stating that, after manufacture, the cargo was stored under cover, but exposed to dry weather for not less than three days prior to shipment
- (16) A certificate from a person recognized by the competent authority of the country of shipment shall be provided by the shipper to the master, prior to loading, confirming that the oil and moisture contents as described in the schedule have been met
- (17) Prior to shipment, a certificate shall be given to the master by the shipper stating that this cargo consists of clean rubber only
- (18) Prior to loading, the shipper or the manufacturer shall provide the master with a certificate stating that the cargo has been cooled and then weathered for not less than 8 weeks prior to shipment
- (19) Prior to loading, the shipper or the manufacturer shall provide the master with a declaration stating that the cargo has been sufficiently heat-treated and is ready for loading
- (20) Prior to loading this cargo, the shipper shall provide the master with a certificate stating that the cargo is clean, dry and free from oil
- (21) This cargo shall only be accepted for loading when the cargo is substantially free from flammable solvent and a certificate from a person recognized by the competent authority of the country of shipment specifying the oil content and moisture content is issued.
- (22) A certificate from a person recognized by the competent authority of the country of shipment shall be provided by the shipper, prior to loading, stating that the requirements for exclusion from either the schedule for SEED CAKE UN 1386 (b) or UN 2217, whichever is applicable, are met as set out in those schedules and that the material does not meet the MHB (SH) criteria specified in 9.2.3.3.
- (23) The manufacturer or the shipper shall provide the master with a certificate stating that, after manufacture, the cargo was stored under cover, but exposed to open air for not less than three days prior to shipment.
- (24) The manufacturer or shipper shall give the master a certificate stating that the cargo is not class 4.2
- (25) Close or direct contact of this cargo and cargo hold lighting such as hot halogen lamps shall be avoided. Fuses to such lights shall be removed or secured while this cargo is present in the cargo space
- (26) Fine grained sulphur (flower of sulphur) shall not be transported in bulk
- (27) Prior to loading, a certificate based on test shall be provided by the manufacturer or shipper stating that the asbestos content is less than 1%
- (28) Prior to loading this cargo, the shipper shall provide the master with a certificate issued by a competent person recognized by the national Administration of the port of loading stating that the cargo, at the time of loading, is suitable for shipment, and that it conforms with the requirements of IMSBC Code; that it does not meet the the criteria for class 4.2 materials; and that it has been prepared and aged naturally for a minimum of 30 days. On completion of loading and before sailing, a certificate shall be issued by a competent person recognized by the national Administration of the port of loading, stating that: .1 the proportion of material larger than 12 mm is no more than 3% by weight; .2 the moisture content of the cargo loaded is at least 2% and below the TML; and .3 the temperature of the cargo loaded does not exceed 65°C.
- (29) During the voyage, mechanical surface ventilation shall be provided as required in IMSBC code schedule of the product. Ventilation arrangement shall be compliant with IMSBC Code requirements. In particular its capacity shall be such as to enable an airflow of at least 1.2 cbm per hour per tonne of cargo in each hold carrying this cargo when needed, and in any case shall have an adequate capacity to ventilate down to a concentration of 0.2% hydrogen by volume (5% LEL) or less.
- (30) The shipper shall provide the master with a certificate issued by a person recognized by the competent authority of the country with the information requested in IMSBC (moisture content, fat content, date of production...)
- (31) Prior to loading this cargo, the shipper shall provide the master with a certificate issued by a competent person recognized by the national Administration of the port of loading stating that the cargo, at the time of loading, is suitable for shipment, and that it conforms with the requirements of IMSBC Code; that the moisture content is less than 0.3%; and that the temperature does not exceed 65°C. This certificate shall state the date of manufacture for each lot of cargo to be loaded in order to meet the loading criteria in regards to ageing and material temperature. After loading, a certificate shall be issued by a competent person recognized by the national Administration of the port of loading confirming that throughout the whole consignment of fines and small particles the moisture content has not exceeded 0.3% and the temperature does not exceed 65°C. Provision shall be made to introduce a dry, inert gas at tank-top level so that the inert gas purges the air from the cargo and fills the free volume above prior to loading and to maintain the oxygen concentration below 5% throughout the voyage in accordance with the requirements of IMSBC.

STATEMENT OF COMPLIANCE : RTD0/OCN/20250716113754

NAME OF SHIP : WAALVLIET

BV REGISTER : 43864F

Space identification:

CARGO HOLD: CARGO HOLD (FR 25 - FR 112)