

TECHNICAL FEATURES GLAZED PORCELAIN STONEWARE
CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (GROUP BIA GL EB ≤ 0,5%)
CARATTERISTICHE TECNICHE GRÉS PORCELLANATO SMALTATO CONFORMI A NORME EUROPEE EN 14411 ISO 13006 APP. G (GRUPPO BIA GL EB ≤ 0,5%)

 SIZES EN ISO 10545-2 compliant	 WATER ABSORPTION EN ISO 10545-3 compliant	 BREAKING STRENGTH EN ISO 10545-4 compliant	 ABRASION RESISTANCE EN ISO 10545-7 from 4 to 5	 RESISTANCE TO LOW CONCENTRATIONS OF ACIDS AND ALKALI RESISTANCE TO HIGH CONCENTRATIONS OF ACIDS AND ALKALI RESISTANCE TO DOMESTIC CHEMICALS AND ADDITIVES FOR SWIMMING POOL EN ISO 10545-13 from GLA to GLB from GHA to GHB GA  V2 MODERATE
 THERMAL EXPANSION COEFFICIENT EN ISO 10545-8 ≤9 MK-1	 THERMAL SHOCK RESISTANCE EN ISO 10545-9 resistant	 FROST RESISTANCE EN ISO 10545-12 resistant	 STAINS RESISTANCE EN ISO 10545-14 Classe 5	
 GLAZE CRAZING RESISTANCE EN ISO 10545-11 resistant	 FRICTION COEFFICIENT DIN 51130 ANSI A137.1 (DCOF) R10 >0,42			

valid for Tsquare Floor 20x20cm

TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE MOSAICS
CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (GROUP BIA UGL EB ≤ 0,5%)
CARATTERISTICHE TECNICHE GRÉS PORCELLANATO NON SMALTATO CONFORMI A NORME EUROPEE EN 14411 ISO 13006 App. G (Gruppo BIA UGL con Eb ≤ 0,5%)

 WATER ABSORPTION EN ISO 10545-3 compliant	 ABRASION RESISTANCE EN ISO 10545-6 compliant	 THERMAL EXPANSION COEFFICIENT EN ISO 10545-8 ≤9 MK-1	 THERMAL SHOCK RESISTANCE EN ISO 10545-9 resistant	 RESISTANCE TO LOW CONCENTRATIONS OF ACIDS AND ALKALI RESISTANCE TO HIGH CONCENTRATIONS OF ACIDS AND ALKALI RESISTANCE TO DOMESTIC CHEMICALS AND ADDITIVES FOR SWIMMING POOL EN ISO 10545-13 from ULA to ULB from UHA to UHB UA  V2 MODERATE
 FROST RESISTANCE EN ISO 10545-12 resistant	 STAINS RESISTANCE EN ISO 10545-14 Classe 5	 COLORS RESISTANCE TO LIGHT DIN 51094 no alteration after testing	 FRICTION COEFFICIENT DIN 51130 ANSI A137.1 (DCOF) R10 >0,42	

valid for Tsquare Mosaic 5x5cm

SARTORIA[®] est. 2018

SARTORIA[®] est. 2018

TECHNICAL SPECIFICATIONS OF WHITE-BODY WALL TILES
CONFORMING TO EN 14411 ISO 13006 STANDARDS APPENDIX L GROUP BIII GL EB > 10%
CARATTERISTICHE TECNICHE RIVESTIMENTI IN PASTA BIANCA CONFORMI A NORME EN 14411 ISO 13006 Appendice L Gruppo BIII GL EB > 10%

 WATER ABSORPTION EN ISO 10545-3 AA>10% group BIII	 BREAKING STRENGTH EN ISO 10545-4 RM> 150kg/cm2	 GLAZE CRAZING RESISTANCE EN ISO 10545-11 resistant	 CHEMICALS RESISTANCE UNI EN ISO 10545-14 UNI EN ISO 10545-13 conforming
--	---	---	---

valid for Tsquare Wall 15x15cm



	BOX SCATOLA			PALLET		
	PCS PZ	SQ.MT. MQ	KG	BOXES SCATOLE	SQ.MT. MQ.	KG
 15x15cm glossy 6"x6"	20	0,45	7,25	125	56,25	926
 20x20cm matt 8"x8"	16	0,64	14,40	72	46,08	1057
 mosaic 5x5cm (sheet 31,6x31,6cm) matt (12'x12') 2"x2"	10	1	10,00	54	54,00	560
 quarter round 1,3x29,9cm glossy 0 1/2"x12"	48	14,35ml	3,85	-	-	-
 pencil 1,5x29,9cm glossy 0 1/2"x12"	21	6,28ml	2,00	-	-	-

TERRATINTA[®] group
Certified
Corporation

A company part of
ITALCER GROUP

SARTORIA[®] est. 2018

brand of TERRATINTA GROUP Srl SB
45, via Viazza II Tronco
41042 Fiorano Modenese (MO) | Italy
T +39 0536911408 F +39 05361940223
terratintagroup.com

Tsquare

Tsquare



DOWNLOAD
AREA




Half Moon *glossy*




Fresh Thyme *glossy*




First Snow *matt*

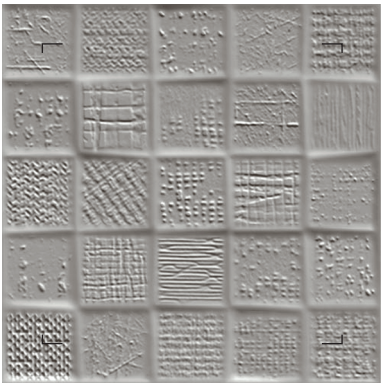


Rainy Day *matt*

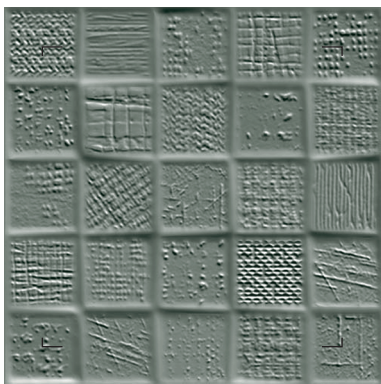

Fresh Thyme *matt*

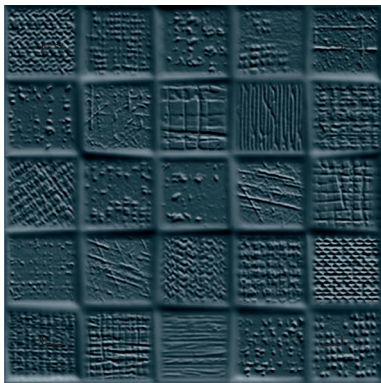


Royal Blue *matt*

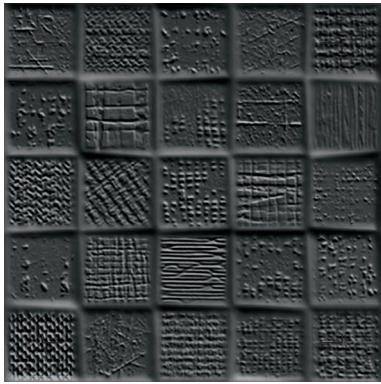

Starry Night *matt*




First Snow *glossy*

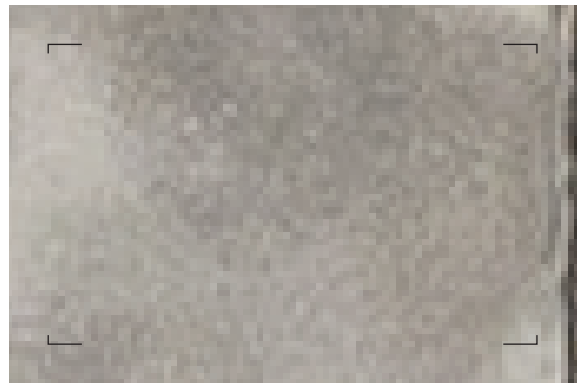

Rainy Day *glossy*




Cozy Nest *glossy*

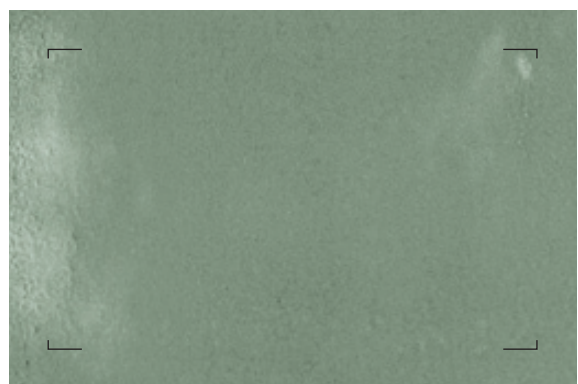


Mint Tea *glossy*



Pure Linen *glossy*

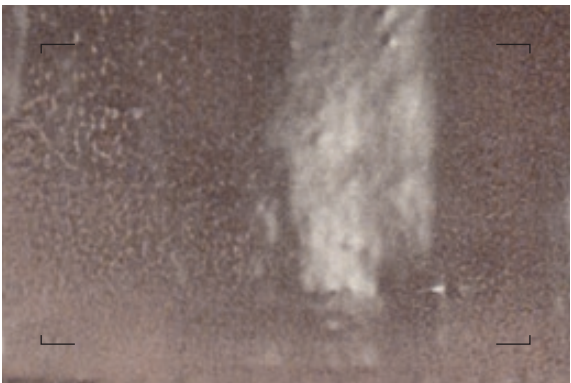

Pink Powder *glossy*

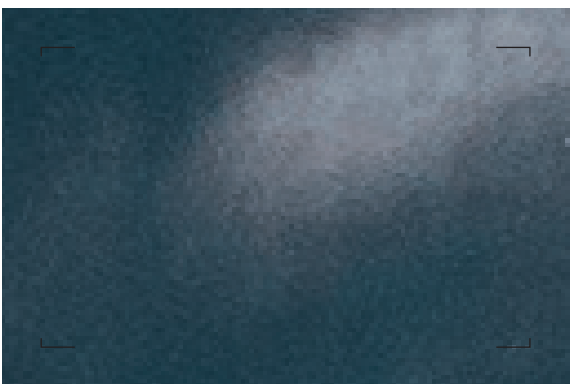

Royal Blue *glossy*



Starry Night *glossy*




Blanc *matt*



Moss *matt*



Noir *matt*

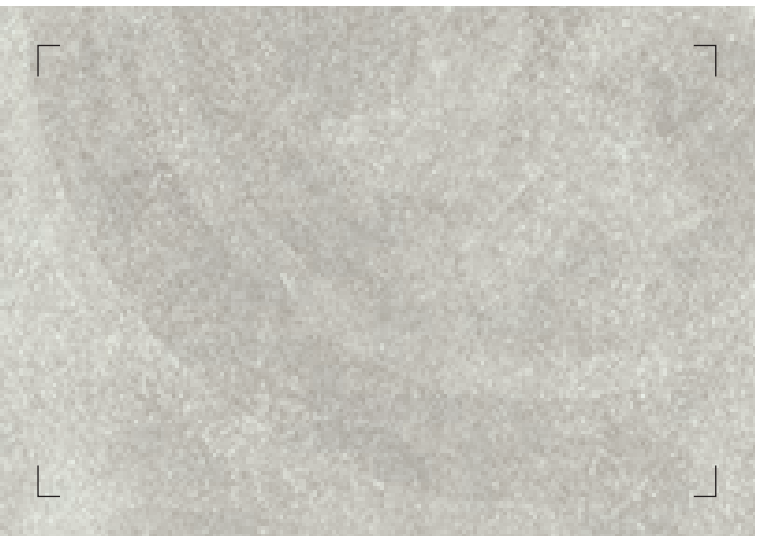

Blanc epoque *matt*




Moss epoque *matt*



Noir epoque *matt*



Smoke epoque *matt*

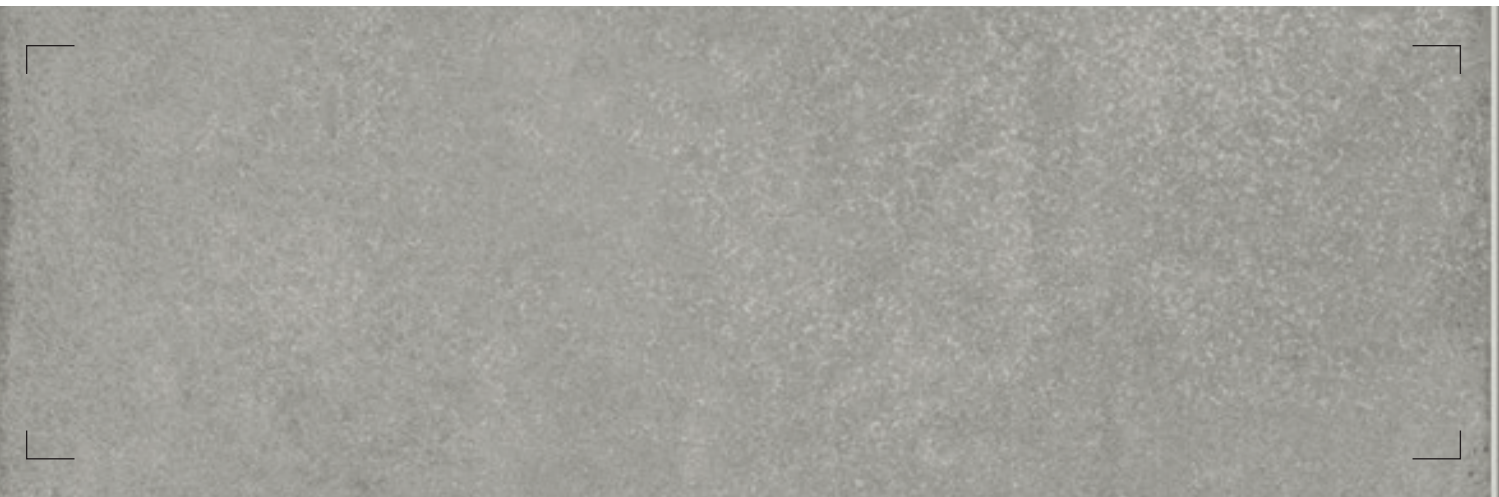

Smoke *matt*