

TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE MOSAICS

CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 ANNEX G (GROUP BIA UGL Eb ≤ 0,5%)
CARATTERISTICHE TECNICHE GRÈS PORCELLANATO NON SMALTATO Conformi a Norme Europee EN 14411 ISO 13006 App. G (Gruppo Bia UGL Eb ≤0,5%)
TECHNISCHE EIGENSCHAFTEN UNGLASIERTES FEINSTEINZEUG Gemäß den Europäischen Normen EN 14411 ISO 13006 App. G (Gruppe Bia UGL Eb ≤ 0,5%)
CARACTERISTIQUES TECHNIQUES GRES CERAME FIN NON ÉMAILLÉ Conformes aux Normes Européennes EN 14411 ISO 13006 App.G (Groupe Bia UGL Eb ≤ 0,5%)

 water absorption <i>assorbimento acqua</i> EN ISO 10545-3	compliant <i>conforme</i> Eb ≤ 0,5%	 chemicals resistance <i>resistenza agli agenti chimici</i> EN ISO 10545-13	from ULA to ULB from UHA to UHB UA <i>da ULA a ULB da UHA a UHB</i> UA
 abrasion resistance <i>resistenza all'abrasione</i> EN ISO 10545-6	compliant <i>conforme</i> 175 mm² max	 stains resistance <i>resistenza alle macchie</i> EN ISO 10545-14	Class 5
 thermal expansion coefficienta <i>coefficiente di dilatazione termica lineare</i> EN ISO 10545-8	≤9 MK-1	 colors resistance to light <i>resistenza dei colori alla luce</i> DIN 51094	no alteration after testing <i>nessuna alterazione dopo il test</i>
 thermal shock resistance <i>resistenza agli sbalzi termici</i> EN ISO 10545-9	resistant <i>resistente</i>	 friction coefficient <i>coefficiente di attrito</i> DIN 51130 ANSI A 137.1 (DCOF)	R10 matt >0,42
 frost resistance <i>resistenza al gelo</i> EN ISO 10545-12	resistant <i>resistente</i>		



DOWNLOAD
AREA

Printed in January 2024

100%
made in
Italy

terratinta
ceramiche

#notaclassicstory

brand of Terratinta Group Srl SB

// 45, via Viazza II Tronco 41042
Fiorano Modenese (MO) Italy
T +39 0536911408
W terratintagroup.com
Terratinta Group
terratintagroup //

#terratintastyle



Grained

Grained





plate



Matt

Ultra Matt



rust

Matt




zinc



Matt

Ultra Matt

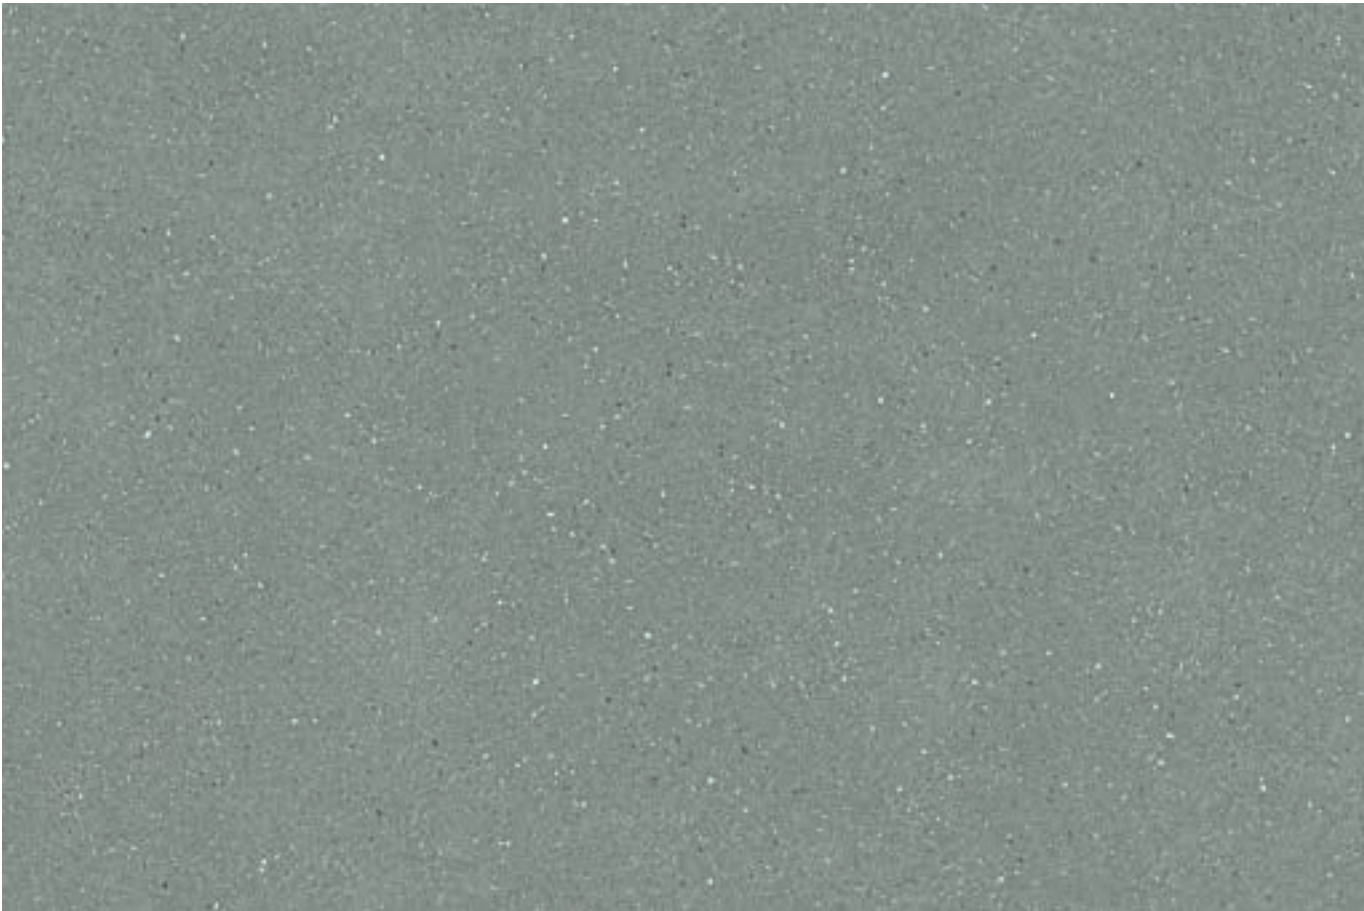

green copper

Matt